


12 Small double open ended spanners ELECTRIC

Chrome Alloy Steel, chrome plated.

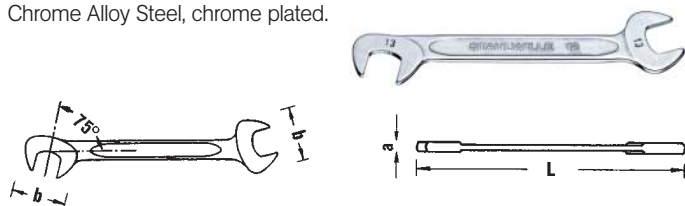

Code	mm	L mm	b mm	a mm	g	
40063232	3.2	70	10.5	2	5	10
40063535	3.5	70	10.5	2	5	10
40060404	4	70	10.5	2	5	10
40064545	4.5	70	10.5	2	5	10
40060505	5	78	12.6	2	7	10
40065555	5.5	78	12.6	2	7	10
40060606	6	78	12.6	2	6	10
40060707	7	91	14.7	2	9	10
40060808	8	96	16.8	3	16	10
40060909	9	103	18.9	3	19	10
40061010	10	105	21	3	22	10
40061111	11	116	24.2	3	27	10
40061212	12	116	24.2	3	27	10
40061313	13	131	28.3	3	37	10
40061414	14	131	28.3	3	36	10


12a Small double open ended spanners ELECTRIC

Code	"	L mm	b mm	a mm	g	
40461010	5/32	70	10.5	2	5	10
40461212	3/16	70	10.5	2	5	10
40461313	13/64	78	12.6	2	7	10
40461414	7/32	78	12.6	2	6	10
40461515	15/64	78	12.6	2	6	10
40461616	1/4	91	14.7	2	9	10
40461818	9/32	91	14.7	2	9	10
40462020	5/16	96	16.8	3	16	10
40462222	11/32	103	18.9	3	19	10
40462424	3/8	105	21	3	22	10
40462828	7/16	116	24.2	3	28	10
40463232	1/2	131	28.3	3	37	10
40463434	9/16	131	28.3	3	36	10

130a Combination spanners

AS-drive HPQ

Fed. Spec. GGG-W-636 E, HPQ high performance steel, chrome plated.

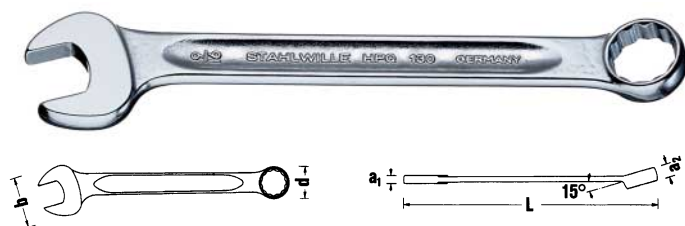


Code	"	L mm	b mm	d mm	a1 mm	a2 mm	g	
40571616	1/4	105	14.2	9.8	3.6	6	13	10
40571818	9/32	110	15.5	10.9	4.1	6	16	10
40572020	5/16	115	17	12	4.5	7	20	10
40572222	11/32	120	19	13.1	4.9	7	25	10
40572424	3/8	125	20.5	14.1	5.2	7	32	10
40572828	7/16	135	23	16.2	6	8	42	10
40573232	1/2	150	27	18.2	6.5	8.5	61	10
40573434	9/16	165	30.5	20.6	7	8.5	78	10

130aSP Spline drive combination spanners

HPQ


MS-33787, MIL-W-8982, HPQ high performance steel, chrome plated.

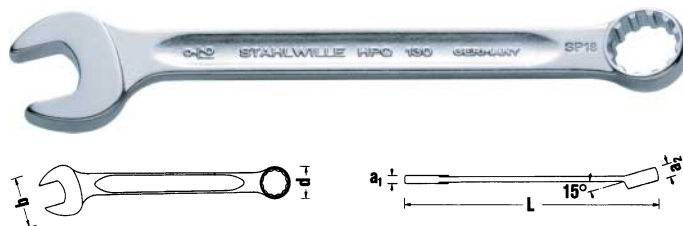

Code	Spline size	"	L mm	b mm	d mm	a1 mm	a2 mm	g	
40581616	8	1/4	105	14.2	10	3.6	5.6	13	5
40582020	10	5/16	115	17	12.2	4.5	6.4	20	5
40582424	12	3/8	125	20.5	14.8	5.2	7	32	5
40582828	14	7/16	135	23	16.5	6	8	42	5
40583232	16	1/2	150	27	18.7	6.5	8.5	61	5
40583434	18	9/16	165	30.5	20.8	7	8.5	78	5

16 Combination spanners OPEN-BOX

ISO 3318,
Chrome Alloy Steel,
chrome plated.

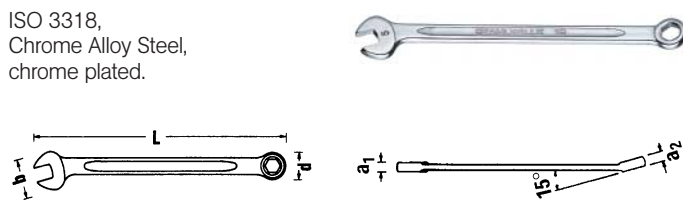


Code	mm	L mm	b mm	d mm	a1 mm	a2 mm	g	
40093232	3.2	75	10	6.6	3	3.2	6	10
40093535	3.5	75	10	6.6	3	3.2	6	10
40094040	4	85	12.5	7.8	3	3.2	9	10
40094545	4.5	85	12.5	7.8	3	3.2	8	10
40095050	5	95	14	9.8	3	3.2	11	10

180a Double ended ring spanners

AS-drive HPQ

short, shallow offset, Fed. Spec. GGG-W-636 E,
S.B.A.C Tech. Spec. T.S. 48 up to size 1/2",
HPQ high performance steel, chrome plated.

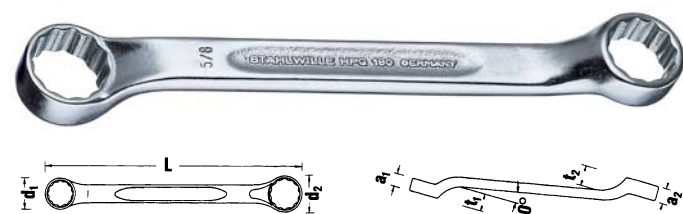

Code	"	L mm	d1 mm	d2 mm	a1 mm	a2 mm	t1 mm	t2 mm	g	
41601620	1/4 x 5/16	107	10.2	11.8	7	8	7.2	7.4	26	10
41602428	3/8 x 7/16	121	14.6	16.7	6.7	7.8	9	10	42	10
41603234	1/2 x 9/16	140	18.5	20.7	8.7	9.5	11	12	62	10
41603436	9/16 x 5/8	148	20.7	22.6	9.5	10.5	11.5	12.5	87	10