



--MAIN--
--INDEX--

SGS[®]

Solid Carbide Tools

An ISO 9002 Certified Company


Metric Standard Catalog



www.sgstool.com

Your Edge in Productivity

--MAIN--
--INDEX--

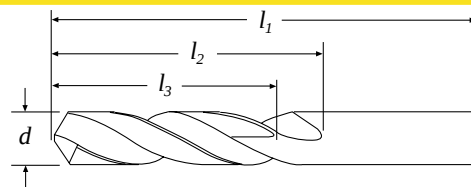

GB

DIN 6539 - Short Length Drills

Micrograin Solid Carbide

Short Length, 118° Four Facet Point,
27° Spiral

ES

Brocas DIN 6539 serie corta

Metal duro con micrograno

Longitud corta, punta de cuatro caras y 118°,
hélice derecha (27°)

FR

Forets courts - DIN 6539

Carbure monobloc, micrograin

Court-Angle d'entrée à quatre facettes, 118°
- Hélice à droite, 27°

PT

Brocas de série curta DIN 6539

Metal duro microgrão

Série Curta, Broca com ponta de quatro facetas,
afiação/ângulo a 118°, espiral de 27° à direita

IT

Punte con lunghezza extra corta DIN 6539

Micrograna

Punte - Serie extra corta - Angolo di testa 118° con
affilatura autocentrante sulla testa. Elica destra a 27°

DE


Bohrer DIN 6539

Vollhartmetall, Feinstkorn

Kurze Ausführung, Vier-Facetten-Anschliff 118°,
27° Drall

ød mm h7	l ₁ mm	l ₂ mm	l ₃ mm	EDP No.	Ti-NAMITE EDP No.	Ti-NAMITE-C EDP No.	Ti-NAMITE-A EDP No.
0,5	20	3		62001	60914	68505	68643
0,55	21	3,5		62003	60915	68506	68644
0,6	21	3,5		62005	60916	68507	68645
0,65	22	4		62007	60917	68508	68646
0,7	23	4,5		62009	60918	68509	68647
0,75	23	4,5		62011	60919	68510	68648
0,8	24	5		62013	60920	68511	68649
0,85	24	5		62015	60921	68512	68650
0,9	25	5,5		62017	60922	68513	68651
0,95	25	5,5		62019	60923	68514	68652
1,0	26	6		62021	60924	68515	68653
1,05	26	6		62023	60925	68516	68654
1,1	28	7		62025	60926	68517	68655
1,15	28	7		62027	60927	68518	68656
1,2	30	8		62029	60928	68519	68657
1,25	30	8		62031	60929	68520	68658
1,3	30	8		62033	60930	68521	68659
1,35	32	9		62035	60931	68522	68660
1,4	32	9		62037	60932	68523	68661
1,45	32	9		62039	60933	68524	68662
1,5	32	9		62041	60934	68525	68663
1,6	34	10		62043	60935	68526	68664
1,7	34	10		62045	60936	68527	68665
1,8	36	11		62047	60937	68528	68666
1,9	36	11		62049	60938	68529	68667
2,0	38	12	9	62051	60939	68530	68668
2,1	38	12	9	62053	60940	68531	68669
2,2	40	13	10	62055	60941	68532	68670
2,3	40	13	10	62057	60942	68533	68671
2,4	43	14	11	62059	60943	68534	68672
2,5	43	14	11	62061	60944	68535	68673
2,6	43	14	11	62063	60945	68536	68674
2,7	46	16	12	62065	60946	68537	68675
2,8	46	16	12	62067	60947	68538	68676
2,9	46	16	12	62069	60948	68539	68677
3,0	46	16	12	62071	60949	68540	68678
3,1	49	18	14	62073	60950	68541	68679
3,2	49	18	14	62075	60951	68542	68680
3,3	49	18	14	62077	60952	68543	68681
3,4	52	20	15	62079	60953	68544	68682
3,5	52	20	15	62081	60954	68545	68683
3,6	52	20	15	62083	60955	68546	68684
3,7	52	20	15	62085	60956	68547	68685
3,8	55	22	17	62087	60957	68548	68686
3,9	55	22	17	62089	60958	68549	68687

TECHNICAL



d TOLERANCES h7

ø mm	mm
≤ 3	+0,000-0,010
>3 - 6	+0,000-0,012
>6 - 10	+0,000-0,015
>10 - 18	+0,000-0,018
>18 - 30	+0,000-0,021