


Technical datasheet

BK1210

Drawn cup needle roller bearings, closed end

Needle roller bearing, drawn cup, closed end

Visual(s)

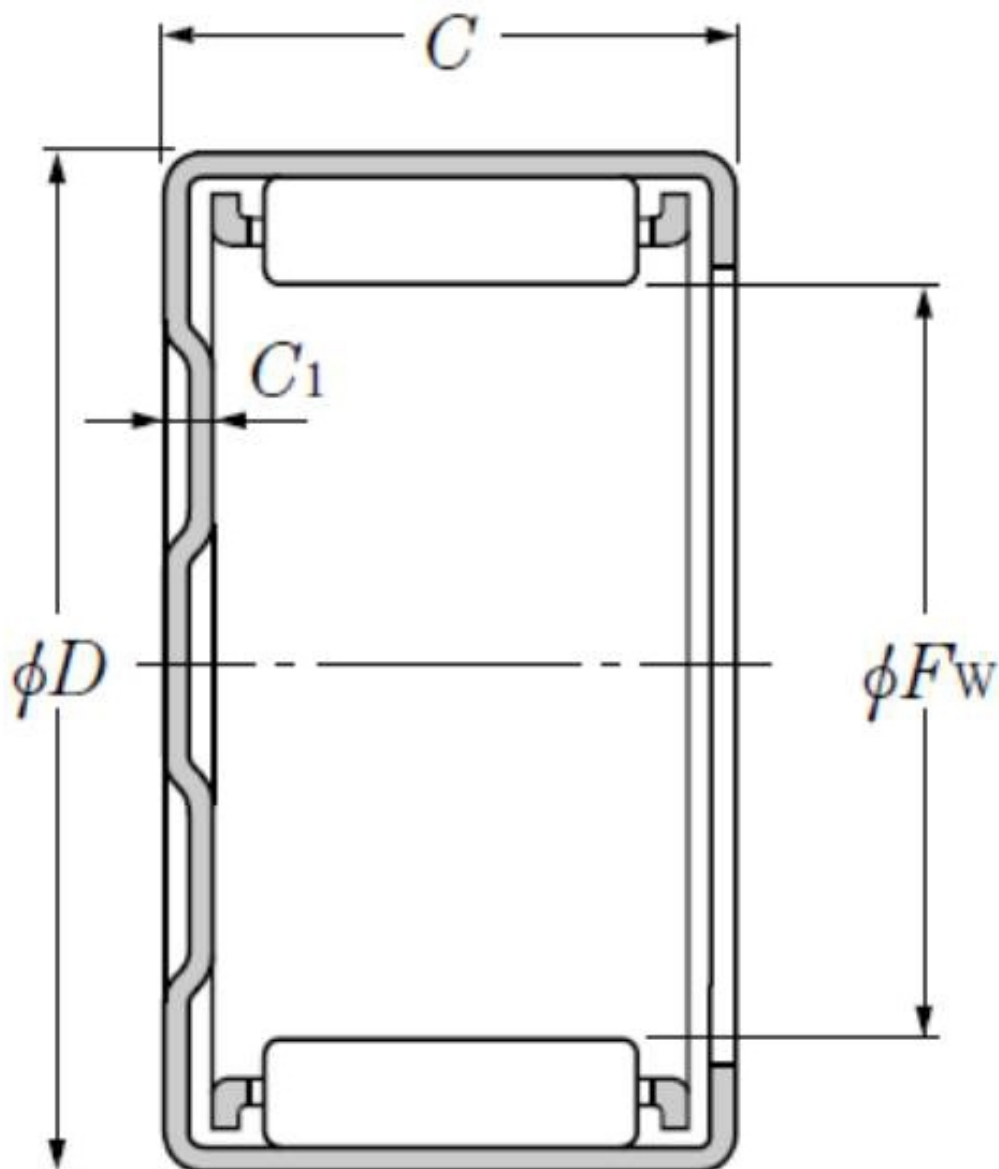

Product definition	
Fw	12 mm
D	16 mm
C	10 mm
C1	1.6 mm
Dw	1.5 mm
Lw	6.3 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	IR8X12X10.5
Mass	0.0052 kg

Product performance	
Cr	5.05 kN
C0r	6.25 kN
Nlim (grease)	13,000 rpm
Nlim (oil)	20,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.89 Hz
Characteristic outer ring frequency, BPF0	8 Hz
Characteristic inner ring frequency, BPFI	10 Hz