



## Directional valves ► Electrically operated

### Series 563, 565, 567 Accessories

| Operational voltage |          |          | Voltage tolerance |             |             | Power consumption | Switch-on power |          | Holding power |          |
|---------------------|----------|----------|-------------------|-------------|-------------|-------------------|-----------------|----------|---------------|----------|
| DC                  | AC 50 Hz | AC 60 Hz | DC                | AC 50 Hz    | AC 60 Hz    | DC                | AC 50 Hz        | AC 60 Hz | AC 50 Hz      | AC 60 Hz |
|                     |          |          |                   |             |             | W                 | VA              | VA       | VA            | VA       |
| 12 V                | -        | -        | -10% / +10%       | -           | -           | 10                | -               | -        | -             | -        |
| 24 V                | -        | -        | -10% / +10%       | -           | -           | 10                | -               | -        | -             | -        |
| 48 V                | -        | -        | -10% / +10%       | -           | -           | 10                | -               | -        | -             | -        |
| 110 V               | -        | -        | -10% / +10%       | -           | -           | 10                | -               | -        | -             | -        |
| 220 V               | -        | -        | -10% / +10%       | -           | -           | 10                | -               | -        | -             | -        |
| -                   | 24 V     | 24 V     | -                 | -10% / +10% | -10% / +10% | -                 | 30              | 25       | 17            | 14.5     |
| -                   | 110 V    | 110 V    | -                 | -10% / +10% | -10% / +10% | -                 | 30              | 25       | 17            | 14.5     |
| -                   | 230 V    | 230 V    | -                 | -10% / +10% | -10% / +10% | -                 | 30              | 25       | 17            | 14.5     |

|                                                                                   | Operational voltage |       |          | Part No.          |
|-----------------------------------------------------------------------------------|---------------------|-------|----------|-------------------|
|                                                                                   | AC 50 Hz            | DC    | AC 60 Hz |                   |
|  | -                   | 12 V  | -        | 0498320503        |
|                                                                                   | -                   | 24 V  | -        | <b>0498319718</b> |
|                                                                                   | -                   | 48 V  | -        | 0498320406        |
|                                                                                   | -                   | 110 V | -        | 0498320309        |
|                                                                                   | -                   | 220 V | -        | <b>0498320201</b> |
|                                                                                   | 24 V                | -     | 24 V     | <b>0498319807</b> |
|                                                                                   | 110 V               | -     | 110 V    | <b>0498319904</b> |
|                                                                                   | 230 V               | -     | 230 V    | <b>0498322409</b> |
|                                                                                   |                     |       |          |                   |
|                                                                                   |                     |       |          |                   |

## Dimensions

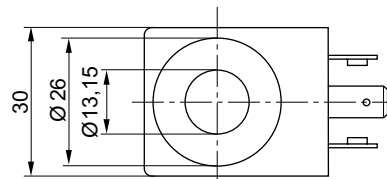

23250