


Pillow blocks cast housing
Eccentric locking collar type

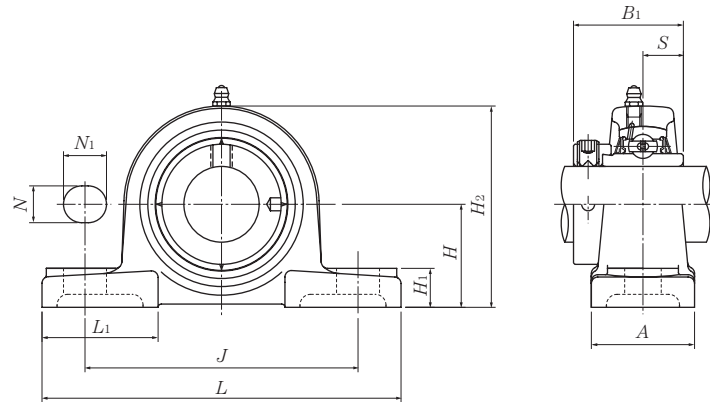

Shaft dia.	Unit number ¹⁾	Nominal dimensions											Bolt size
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B ₁	S	
mm inch													mm inch
20 $\frac{3}{4}$	UEL204D1W3 UEL204-012D1W3	33.3 $1\frac{5}{16}$	127 5	95 $3\frac{3}{4}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	16 $\frac{5}{8}$	14 $\frac{9}{16}$	65 $2\frac{9}{16}$	42 $1\frac{21}{32}$	43.7 1.720	17.1 0.673	M10 $\frac{3}{8}$
25 $1\frac{13}{16}$ $\frac{7}{8}$ $1\frac{15}{16}$ 1	UEL205D1W3 UEL205-013D1W3 UEL205-014D1W3 UEL205-015D1W3 UEL205-100D1W3	36.5 $1\frac{7}{16}$	140 $5\frac{1}{2}$	105 $4\frac{1}{8}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	16 $\frac{5}{8}$	15 $1\frac{19}{32}$	71 $2\frac{25}{32}$	42 $1\frac{21}{32}$	44.4 1.748	17.45 0.687	M10 $\frac{3}{8}$
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UEL206D1W3 UEL206-101D1W3 UEL206-102D1W3 UEL206-103D1W3 UEL206-104D1W3	42.9 $1\frac{11}{16}$	165 $6\frac{1}{2}$	121 $4\frac{3}{4}$	48 $1\frac{7}{8}$	17 $2\frac{1}{32}$	20 $2\frac{25}{32}$	17 $2\frac{1}{32}$	83 $3\frac{9}{32}$	54 $2\frac{1}{8}$	48.4 1.906	18.25 0.719	M14 $\frac{1}{2}$
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UEL207D1W3 UEL207-104D1W3 UEL207-105D1W3 UEL207-106D1W3 UEL207-107D1W3	47.6 $1\frac{7}{8}$	167 $6\frac{9}{16}$	127 5	48 $1\frac{7}{8}$	17 $2\frac{1}{32}$	20 $2\frac{25}{32}$	18 $2\frac{23}{32}$	93 $3\frac{21}{32}$	54 $2\frac{1}{8}$	51.1 2.012	18.8 0.740	M14 $\frac{1}{2}$
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UEL208D1W3 UEL208-108D1W3 UEL208-109D1W3	49.2 $1\frac{15}{16}$	184 $7\frac{1}{4}$	137 $5\frac{13}{32}$	54 $2\frac{1}{8}$	17 $2\frac{1}{32}$	20 $2\frac{25}{32}$	18 $2\frac{23}{32}$	98 $3\frac{27}{32}$	52 $2\frac{1}{16}$	56.3 2.217	21.4 0.843	M14 $\frac{1}{2}$
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UEL209D1W3 UEL209-110D1W3 UEL209-111D1W3 UEL209-112D1W3	54 $2\frac{1}{8}$	190 $7\frac{15}{32}$	146 $5\frac{3}{4}$	54 $2\frac{1}{8}$	17 $2\frac{1}{32}$	20 $2\frac{25}{32}$	20 $2\frac{25}{32}$	106 $4\frac{3}{16}$	60 $2\frac{3}{8}$	56.3 2.217	21.4 0.843	M14 $\frac{1}{2}$
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UEL210D1W3 UEL210-113D1W3 UEL210-114D1W3 UEL210-115D1W3 UEL210-200D1W3	57.2 $2\frac{1}{4}$	206 $8\frac{1}{8}$	159 $6\frac{1}{4}$	60 $2\frac{3}{8}$	20 $2\frac{25}{32}$	23 $2\frac{29}{32}$	21 $1\frac{13}{16}$	114 $4\frac{1}{2}$	65 $2\frac{9}{16}$	62.7 2.469	24.6 0.969	M16 $\frac{5}{8}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 44 for size of grease fitting.