

The Timken Company


4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number UCFC213, UCFC 200 Piloted Round Flanged Mounted Bearings - Set Screw Locking






<u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u>


Specifications –				
	Bearing Number	UC213		
	Shaft Size d	65 mm		
	UPC Code	087796076105		
	Locking Style	Set Screw Locking		
	Housing Construction	Round Flange		
	Housing Constituction	Nouriu i lange		

Din	nensions		-
	Total Height L	205 mm 8.071 in	
	ilot Outside Diameter H3	145 mm	

Bolt Circle Diameter J	170 mm 6.693 in
Bolt Hole Spacing J1	120.2 mm 4.732 in
Bolt Hole Size N	19 mm 0.748 in
Flange Width A1	36 mm 1.417 in
Center of Bearing from Housing End A2	16 mm 0.63 in
Pilot Width A3	14 mm
Inner Ring Width B	65.1 mm 2.563 in
Center of Bearing from Bearing End S	25.4 mm 1 in
Dimension A4	55.7 mm 2.188 in

Basic Load Ratings -					
	Static Load Rating	40100 N 9015 lbf			
	Dynamic Load Rating	57200 N 12859 lbf			

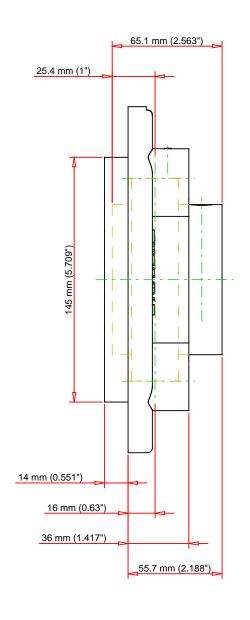

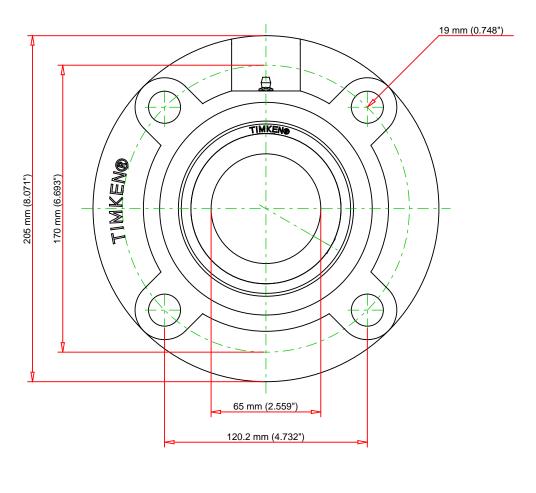

Bearing Number	UC213			
Load Ratings - C _r	12859	lbf	57200	N
Load Ratings - C _{0r}	9015	lbf	40100	N
Weight	12.3	lb	5.6	kg
Bolt Size	M16			

TUMUSEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UCFC213

UCFC 200 Piloted Round Flanged Mounted Bearings - Set Screw Locking

FOR DISCUSSION ONLY

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.