




Technical data

722511 DB

Flanged housings 722500

Flanged housing for bearings on adapter sleeve, made of grey cast, for grease lubrication

VISUAL (S)

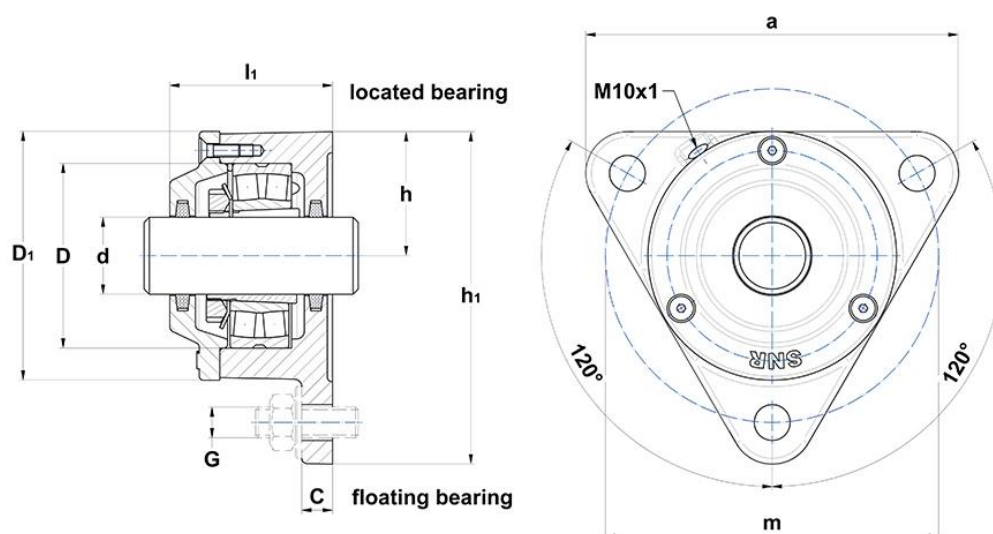

PRODUCT DEFINITION

d - Shaft diameter	50 mm
D1 - Outer diameter cover	128 mm
a - Housing length	192 mm
c - Housing foot height	12 mm
h - Bearing center height	65 mm
h1 - Housing height	172 mm
l1 - Housing width over covers	81,5 mm
m - Mounting hole/punches distance (length)	170 mm

PRODUCT DEFINITION

N - Mounting hole diameter	14 mm
D - Bearing seat diameter	100 mm
Mass	4,1 kg
Material of Housing	grey cast
Brand	SNR

BOLTS

G - Fixing bolts	M12
Recommended torque fixing bolts	65 N-m
Cover bolts	M6x20
Recommended torque cover bolts	7 N-m

ASSOCIATED COMPONENTS - GENERAL

Feltstrip	FS 8 x 6,5 x 210
------------------	------------------

ASSOCIATED COMPONENTS - OPTION 1

Bearing	1211 K C3
Adapter sleeve	H211
Fixing ring (x1)	FR100x6x3

ASSOCIATED COMPONENTS - OPTION 2

Bearing	2211 K C3
Adapter sleeve	H311
Fixing ring (x1)	FE100x85x2

ASSOCIATED COMPONENTS - OPTION 3

Bearing	22211 K
Adapter sleeve	H311

ASSOCIATED COMPONENTS - OPTION 3

Fixing ring (x1)

FE100x85x2