


The Timken Company 4500 Mt Pleasant St. NW

N. Canton, OH 44720 **Phone:** (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number UCF214, UCF 200 Four-Bolt Flanged Housed Units - Set Screw Locking






<u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u>


Specifications –				
	Bearing Number	UC214		
	Shaft Size d	70 mm		
	Weight	13 lb 5.9 Kg		
	UPC Code	087796073913		
	Locking Style	Set Screw Locking		
	Housing Construction	Four-Bolt Square Flange		

Din	nensions		-
	Grease Nipple Size	A-R1/8	
	Total Length L	193.00 mm 7.598 in	

Housing Width A	54.00 mm 2.126 in
Bolt Hole Spacing J	152.00 mm 5.984 in
Bolt Hole Size N	19.00 mm 0.748 in
Flange Thickness A1	22.00 mm 0.866 in
Center of Bearing from Housing End A2	31 mm 1.22 in
Inner Ring Width B	74.60 mm 2.937 in
Bolt Size	M16
Center of Bearing from Bearing End S	30.20 mm 1.189 in
Dimension A0	2.969 in 75.4 mm

Basic Load Ratings -					
	Static Load Rating	9914 lbf 44100 N			
	Dynamic Load Rating	13983 lbf 62200 N			

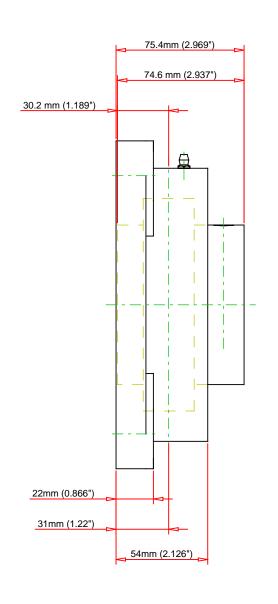

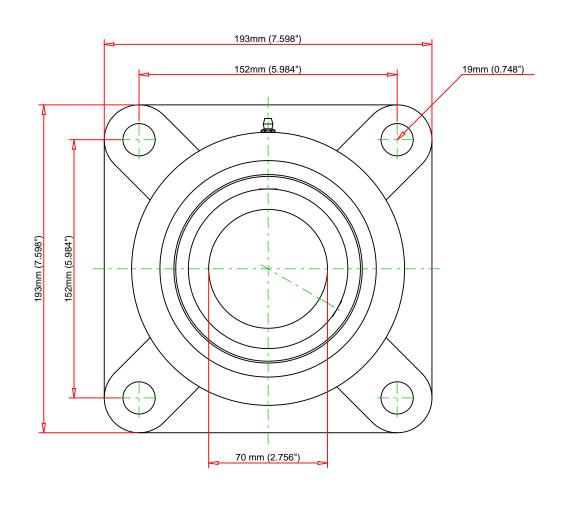

Bearing Number	UC214			
Load Ratings - C _r	13983	lbf	62200	N
Load Ratings - C _{0r}	9914	lbf	44100	N
Weight	13	lb	5.9	kg
Bolt Size	M16			

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UCF214

UCF 200 Four-Bolt Flanged Housed Units
- Set Screw Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY