

The PCL logo is rendered in a large, bold, 3D font. The letters 'P' and 'L' are red with blue outlines, while the 'C' is solid blue. The background of the entire cover is a collage of industrial air line products, including various fittings, hoses, and a spray gun, with a red and blue color scheme.

PCL

AIR TECHNOLOGY

Setting the Standards

**AIR LINE
PRODUCTS**

PRODUCT GUIDE

www.pcl.org.uk
sales@pcl.org.uk

AIR LINE PRODUCTS

PCL HQ
Sheffield, England



PNEUMATIC COMPONENTS LTD

'Setting the standards'

Establishing the highest quality standards are the trademark of PCL's product portfolio.

PCL are committed to continue to improve the standards it has been setting for over 60 years throughout the world in **TYRE INFLATION EQUIPMENT** and **AIR LINE PRODUCTS**.

Product innovation with high quality designs and automated manufacturing skills have maintained PCL's product durability.

Uncompromising design and build quality have made installation, operation and servicing of PCL units easier and cost effective.

PCL's customer focus have promoted superior customer service levels with next day delivery, 24hr opening, full technical support and no minimum order values making products and information readily available.

PCL also offer full product application support with 'on site' product training and qualified help desk assistance.

CONTENTS

Standard Adaptors	3
Airflow Couplings	3
Vertex Couplings	3
Twin Couplings	4
Safety Couplings	4
Non-Corrodible Couplings	4
XF Adaptors	5
XF Couplings	5
ZF Adaptors	6
ZF Couplings	6
Multi-Fit Couplings	6
60 Series Adaptors	7
60 Series Couplings	7
100 Series Adaptors	7
100 Series Couplings	7
Euro Adaptors	8
Euro Couplings	8
ISO B12 Adaptors	8
ISO B12 Couplings	8
Wee Adaptors	9
Wee Couplings	9
Mini Adaptors	9
Mini Couplings	9
Schrader Adaptors	10
Schrader Couplings	10
Instant-Air Adaptors	10
Instant-Air Couplings	10
Hose Connectors & Fittings	11
Rubber Alloy Air Hose	12
Pre-Cut & Pre-Packed	12
Rubber Alloy Air Hose	12
Air Tool Whip Hose	12
Coiled Hose Assemblies	13
Blowguns	13
Blowgun Nozzles	13
Plastic Blowgun	13
Air & Watergun	13
Water Dispensers	14
Syphon Spraygun	14
Airvacs	14
Air Treatment Range	14
Series 4&8	14
Air Treatment Kits	14
Worm Drive Hose Clips	14

STANDARD

STANDARD ADAPTORS & COUPLINGS



Standard Adaptor

STANDARD ADAPTORS

- Commonly used for most garage equipment applications
- All PCL adaptors are case hardened for longer product life
- For use with all Airflow and Vertex couplings

Part No. Description

ACA2746	Female thread Rp 1/4
ACA6582	Female thread Rp 3/8
ACA6583	Female thread Rp 1/2
ACA2593	Male thread R 1/4
ACA6909	Male thread R 3/8
ACA6584	Male thread R 1/2
ACA1793	6.35mm bore hose (1/4")
ACA2486	4.75mm bore hose (3/16")
ACA2487	7.9mm bore hose (5/16")
ACA2488	9.5mm bore hose (3/8")

ACA9101 R 1/4 male thread standard safety adaptor

AIRFLOW COUPLINGS

- Single Action - Designed for fixed applications
- Zinc Plated all steel construction finished in yellow passivate - robust and hard wearing
- Stainless Steel spring and balls - Long lasting and corrosion resistant

Part No. Description

AC21CF	Female thread Rp 1/4
AC21EF	Female thread Rp 3/8
AC21JF	Female thread Rp 1/2
AC21CM	Male thread R 1/4
AC21EM	Male thread R 3/8
AC21JM	Male thread R 1/2
AC21R	With integral tailpiece suitable for 7mm (1/4") I.D hose
AC21S	With integral tailpiece suitable for 8mm (5/16") I.D hose
AC21T	With integral tailpiece suitable for 10mm (3/8") I.D hose

VERTEX COUPLINGS

- Double action - Designed for trailing hose applications
- Incorporates all the design features of the Airflow coupling
- Protective shoulder prevents dirt ingress and accidental disconnection

Part No. Description

AC91CF	Female thread Rp 1/4
AC91EF	Female thread Rp 3/8
AC91JF	Female thread Rp 1/2
AC91CM	Male thread R 1/4
AC91EM	Male thread R 3/8
AC91JM	Male thread R 1/2
AC91R	With integral tailpiece suitable for 7mm (1/4") I.D hose
AC91S	With integral tailpiece suitable for 8mm (5/16") I.D hose
AC91T	With integral tailpiece suitable for 10mm (3/8") I.D hose

NOTE:- Usage of non-genuine PCL couplings and adaptors invalidates all warranty and liability insurance.



Airflow Coupling



Vertex Coupling

STANDARD

Twin Couplings

TWIN COUPLINGS

- Twin Couplings are the convenient way to provide two operating points from a single supply source

**Part No. Description**

AC6103 Twin Airflow Coupling, individual carton

AC6503 Twin Vertex Coupling, individual carton

SAFETY COUPLINGS

- For use with standard adaptors
- The new push button, locking action prevents hose whip
- Fully conforms to safety standard requirements
- Allows safe disconnection



Safety Couplings

Part No. Description

AC29CM Male R 1/4

AC29CF Female Rp 1/4

NON-CORRODIBLE COUPLINGS

- For use with standard adaptors
- All brass coupling prevents corrosion

Part No. Description

AC32CM Male R 1/4

AC32CF Female Rp 1/4

Non-Corrodible

NOTE:- R, Rp and Rc threads are taken from BS21:1985 pipe threads for tubes and fittings where pressure tight joints are made on the threads.

G threads are taken from BS2779:1986 pipe threads for tubes and fittings where pressure tight joints are not made on the threads.



XF**XF ADAPTORS & COUPLINGS**

XF Adaptors

XF ADAPTORS

- Industry standard profile offers superior tool efficiency
- Hardened steel for longer life
- Improved corrosion resistance

Part No. Description

AA7101	Male R 1/8
AA7102	Male R 1/4
AA7103	Male R 3/8
AA7104	Male R 1/2
AA7105	Female Rp 1/8
AA7106	Female Rp 1/4
AA7107	Female Rp 3/8
AA7108	Female Rp 1/2
AA7109	4mm Hose Tailpiece
AA7110	6mm Hose Tailpiece
AA7111	8mm Hose Tailpiece
AA7112	10mm Hose Tailpiece
AA7113	13mm Hose Tailpiece

XF COUPLINGS

- Unique valve offers superior tool efficiency
- Longer lasting unit with extended corrosion resistance
- High flow rate of 78cfm @ 6 bar(87 psi), and 0.5 bar pressure drop 2220 l/min suits most applications
- Wider range
- Tested to over 1 million cycles

Part No. Description

AC71CM	Male R 1/4
AC71EM	Male R 3/8
AC71JM	Male R 1/2
AC71CF	Female Rp 1/4
AC71EF	Female Rp 3/8
AC71JF	Female Rp 1/2
AC7106	6mm Hose Tailpiece
AC7108	8mm Hose Tailpiece
AC7110	10mm Hose Tailpiece
AC7113	13mm Hose Tailpiece



XF Couplings



ZF Adaptors



ZF Couplings



Multi-fit Couplings



XF Adaptor



Euro Adaptor

ISO B12
Adaptor

ZF & MULTI-FIT

ZF ADAPTORS

- Heavy duty design for additional flow requirements

Part No. Description

AA8101	Male R 1/4
AA8102	Male R 3/8
AA8103	Male R 1/2
AA8104	Male R 3/4

AA8105	Female Rp 1/4
AA8106	Female Rp 3/8
AA8107	Female Rp 1/2
AA8108	Female Rp 3/4

AA8109	6mm Hose Tailpiece
AA8110	8mm Hose Tailpiece
AA8111	10mm Hose Tailpiece
AA8112	13mm Hose Tailpiece
AA8113	16mm Hose Tailpiece
AA8114	19mm Hose Tailpiece

ZF COUPLINGS

- Larger bore for increased air flow rates
- Used for larger air thirsty applications
- Heavy duty design
- Incorporates all the advantages of the XF couplings
- Free Flow rate 220CFM (6226 l/min)

Part No. Description

AC81CM	Male R 1/4
AC81EM	Male R 3/8
AC81JM	Male R 1/2
AC81LM	Male R 3/4

AC81CF	Female Rp 1/4
AC81EF	Female Rp 3/8
AC81JF	Female Rp 1/2
AC81LF	Female Rp 3/4

AC8108	8mm Hose Tailpiece
AC8110	10mm Hose Tailpiece
AC8113	13mm Hose Tailpiece
AC8116	16mm Hose Tailpiece
AC8119	19mm Hose Tailpiece

MULTI-FIT COUPLINGS

- New design accepts the Euro, ISO B12, and XF adaptors
- Incorporates a hardened steel shoulder which prevents accidental disconnection in use
- Flow rate 125 CFM (3538 l/min)

Part No. Description

AC73CM	Male thread R 1/4
AC73EM	Male thread R 3/8
AC73JM	Male thread R 1/2
AC73CF	Female thread Rp 1/4
AC73EF	Female thread Rp 3/8
AC73JF	Female thread Rp 1/2
AC7306	With integral tailpiece, suitable for 6mm (1/4") hose
AC7308	With integral tailpiece, suitable for 8mm (5/16") hose
AC7310	With integral tailpiece, suitable for 10mm (1/2") hose
AC7313	With integral tailpiece, suitable for 13mm (3/8") hose

60 & 100 SERIES

60 & 100 SERIES ADAPTORS & COUPLINGS



60 Series
Adaptors



60 Series Couplings



100 Series
Adaptors



100 Series Couplings

60 SERIES ADAPTORS

- Incorporates a hardened steel shoulder which prevents accidental disconnection in use
- Zinc Plated all steel construction finished in yellow passivate - robust and hard wearing

Part No. Description

ACA2653	Female thread Rp 1/4 screwed adaptor
ACA2660	Female thread Rp 3/8 screwed adaptor
ACA2661	Male thread R 3/8 screwed adaptor
ACA2654	7.9mm (5/16") bore hose Tailpiece
ACA2658	9.5mm (3/8") bore hose Tailpiece
ACA2659	12.7mm (1/2") bore hose Tailpiece
ACA9201	60 Series R 3/8 male thread safety adaptor

60 SERIES COUPLINGS

- Incorporates a hardened steel shoulder which prevents accidental disconnection in use
- Zinc Plated all steel construction finished in yellow passivate - robust and hard wearing

Part No. Description

AC4CF	Female thread Rp 1/4
AC4EF	Female thread Rp 3/8
AC4JF	Female thread Rp 1/2
AC4CM	Male thread R 1/4
AC4EM	Male thread R 3/8
AC4JM	Male thread R 1/2

100 SERIES ADAPTORS

- Includes all the design features of the 60 series
- Heavy duty robust design for industrial applications

Part No. Description

ACA2994	Female thread Rp 3/8
ACA2999	Male thread R 3/8
ACA3035	Male thread R 1/2
ACA3036	12.7mm (1/2") bore hose Tailpiece
ACA3037	9.5mm (3/8") bore hose Tailpiece

ACA9301	100 Series R 1/2 male thread safety adaptor
---------	---

100 SERIES COUPLINGS

- Includes all the design features of the 60 series
- Heavy duty robust design for industrial applications

Part No. Description

AC5EF	Female thread Rp 3/8
AC5JF	Female thread Rp 1/2
AC5EM	Male thread R 3/8
AC5JM	Male thread R 1/2



Euro Adaptors



Euro Couplings



ISO B12 Adaptors



ISO B12 Couplings

EURO & ISO B12

EURO ADAPTORS

Part No. Description

ACA6924	Female Rp 1/4 screwed adaptor
ACA6923	Male R 1/4 screwed adaptor
ACA6912	6.35mm (1/4") bore hose
ACA6922	7.9mm (5/16") bore hose
ACA6930	9.5mm (3/8") bore hose

EURO COUPLINGS

- The new PCL Euro coupling, which replaces the Euro AC6
- For all rigorous applications
- 44 cuft/min airflow rate @ 100 psi
- Robust construction
- Built in swivel, prevents hose kinking
- Compatible with ARO210 and ORION

Part No. Description

AC61CM	Male thread R 1/4
AC61EM	Male thread R 3/8
AC61JM	Male thread R 1/2
AC61CF	Female thread Rp 1/4
AC61EF	Female thread Rp 3/8
AC61JF	Female thread Rp 1/2
AC61R	With integral tailpiece, suitable for 7mm (1/4") hose
AC61S	With integral tailpiece, suitable for 8mm (5/16") hose
AC61T	With integral tailpiece, suitable for 10mm (3/8") hose

ISO B12 ADAPTORS

Part No. Description

AA7502	Male R 1/4
AA7506	Female Rp 1/4
AA7510	With integral tailpiece, suitable for 7mm (1/4") hose
AA7511	With integral tailpiece, suitable for 8mm (5/16") hose

ISO B12 COUPLINGS

- For industrial applications where this standard profile is required
- ISO B12 freeflow rate is 65.3 cfm (1847 l/min) @ 100 psi

Part No. Description

AC75CM	Male thread R 1/4
AC75EM	Male thread R 3/8
AC75JM	Male thread R 1/2
AC75CF	Female thread Rp 1/4
AC75EF	Female thread Rp 3/8
AC75JF	Female thread Rp 1/2
AC7506	With integral tailpiece, suitable for 7mm (1/4") hose
AC7508	With integral tailpiece, suitable for 8mm (5/16") hose
AC7513	With integral tailpiece, suitable for 13mm (1/2") hose

WEE & MINI

WEE & MINI ADAPTORS & COUPLINGS



Wee Adaptors



Wee Couplings



Mini Adaptors



Mini Couplings



WEE ADAPTORS

- Original PCL profile , chrome plated brass

Part No.	Description
ACA2092	Female thread R 1/8
ACA2548	Female thread Rp 1/8
ACA2048	Male thread R 1/8
ACA6535	Male thread R 1/4
ACA2057	3.2mm (1/8") bore hose
ACA2058	4.75mm (3/16") bore hose
ACA2238	6.25mm (1/4") bore hose

WEE COUPLINGS

- Used in surgical applications
- Designed for situations where size and weight are of prime importance
- Free flow air rate at 7 bar (100lbf/in²) 10 to 12ft³/min
284 to 340 litres/min

Part No.	Description
AC1AF02	Female thread R 1/8
AC1BF02	Female thread Rp 1/8
AC1AM02	Male thread R 1/8
AC1CM02	Male thread R 1/4

MINI ADAPTORS

- The new compact, brass high-flow industrial coupling
- Fully compatible with leading industry standards

Part No.	Description
AA11AM	G1/8 Male
AA11CM	G1/4 Male
AA11AF	G 1/8 Female
AA11CF	G 1/4 Female
AA1104	Hose Tail for 4mm hose
AA1106	Hose Tail for 6mm hose
AA1109	Hose Tail for 9mm hose

MINI COUPLINGS

- The new compact, brass high-flow industrial coupling
- Fully compatible with leading industry standards
- Flow rate 46 cfm(1280 l/min)

Part No.	Description
AC11AF	G1/8 Female
AC11CF	G1/4 Female
AC11AM	G1/8 Male
AC11CM	G1/4 Male



Schrader Adaptors



Schrader Couplings



Instant - Air Adaptors



Instant - Air Coupling

SCHRADER/INSTANT-AIR

SCHRADER ADAPTORS

- Genuine Schrader products
- Heavy duty and standard. Full industrial range available

Part No.	Description
ACAS101	Standard adaptor 1/4" serrated (8787 - 11)
ACAS102	Standard adaptor 3/8" serrated (8788 - 11)
ACAS103	Standard adaptor 5/16" serrated (9750 - 11)
ACAS104	Standard adaptor R 1/4 male (8050B - 11)
ACAS105	Standard adaptor Rc 1/4 female (8278L - 11)
ACAS201	Heavy duty adaptor 3/8" serrated (1097 - 11)
ACAS202	Heavy duty adaptor 1/2" serrated (1098 - 11)
ACAS203	Heavy duty adaptor R 1/2 male (8807 - 11)
ACAS204	Heavy duty adaptor R 1/4 male (8624B - 11)
ACAS205	Heavy duty adaptor R 3/8 male (9739 - 11)

SCHRADER COUPLINGS

- Genuine Schrader products with twist action
- Heavy duty and standard. Full industrial range available
- Flow rate at 7 bar (100lb/in²):
Heavy duty - 110 ft³/min. Standard - 50 ft³/min

Part No.	Description
ACS101	Standard coupling 1/4 Rp female (8952D - 12)
ACS102	Standard coupling 1/4 R male (9793D - 12)
ACS103	Standard coupling 3/8 R male (9792D - 12)
ACS201	Heavy duty coupling 1/2 Rp female (1461EL - 12)

INSTANT-AIR ADAPTORS

- Genuine Broomwade Bayonet Fitting
- Used in various industrial applications

Part No.	Description
AA5102	Male R 1/4 (PT 8808)
AA5106	Female Rp 1/4 (PT 8806)

INSTANT-AIR COUPLINGS

- Genuine Broomwade Bayonet Fitting coupling
- Used in various industrial applications

Part No.	Description
AC51CM	Male R 1/4 (PT 8825)
AC51CF	Female Rp 1/4" (PT 8823)

HOSE FITTINGS

HOSE CONNECTORS AND FITTINGS



Male Screwed Tailpiece



Coned Tailpiece



Union Nut



Parallel Socket



Reducing Bush m/f



Reducing Union m/m



Reducing Bush f/f



Hose Connector



Double Union

Male Screwed Tailpiece

HC5656	R 1/4 6.35 mm (1/4") bore hose
HC1205	R 1/4 4.75 mm (3/16") bore hose
HC1206	R 1/4 7.9 mm (5/16") bore hose
HC1217	R 1/4 9.5 mm (3/8") bore hose
HC2479	R 1/4 12.7 mm (1/2") bore hose
HC6904	R 3/8 6.35 mm (1/4") bore hose
HC6905	R 3/8 7.9 mm (5/16") bore hose
HC2951	R 3/8 9.5 mm (3/8") bore hose
HC2808	R 3/8 12.7 mm (1/2") bore hose
HC6908	R 1/2 9.5 mm (3/8") bore hose
HC2954	R 1/2 12.7 mm (1/2") bore hose

Coned Tailpiece

HC5030	4.75 mm (3/16") bore hose for Rp1/4 union nut
HC5275	6.35 mm (1/4") bore hose for Rp 1/4 union nut
HC5276	7.9 mm (5/16") bore hose for Rp 1/4 union nut
HC1225	9.5 mm (3/8") bore hose for Rp 1/4 union nut
HC2192	9.5mm (3/8") bore hose for Rp 3/8 union nut
HC2594	7.9mm (5/16") bore hose for Rp 3/8 union nut
HC2595	6.35mm (1/4") bore hose for Rp 3/8 union nut

Union Nut

HC5194	Rp 1/4 (for tailpieces 5030, 5275 and 5276)
HC1226	Rp 1/4 (for tailpiece 1225)
HC2181	Rp 3/8 (for tailpieces 2595, 2594 and 2192)

Parallel Socket

HC6889	Rp 1/4
--------	--------

Reducing Bush M x F

HC6475	R 1/4 x Rp 3/8
HC6895	R 3/8 x Rp 1/4
HC6896	R 1/2 x Rp 1/4
HC6897	R 1/2 x Rp 3/8

Reducing Union M x M

HC6899	R 3/8 x R 1/4
HC6900	R 1/2 x R 1/4
HC6901	R 1/2 x R 3/8

Reducing Bush F x F

HC6892	Rp 3/8 x Rp 1/4
--------	-----------------

Double-ended Hose Connector/Repairer

HC2983	6.35 mm (1/4") bore hose
HC2984	7.9 mm (5/16") bore hose
HC2985	9.5 mm (3/8") bore hose
HC2986	12.7 mm (1/2") bore hose

Double Union

HC6560	R 1/4
HC4281	R 3/8
HC6898	R 1/2



Rubber alloy air hose

HOSE LENGTHS

With all PCL Hoses the asterisk in the number indicates the length required. When ordering customers are requested to indicate the length required by including, in place of the asterisk, the relevant length letter from the list below.

Metre length

1=A, 5=B, 10=C, 15=D, 20=E, 25=F, 30=H, 35=J, 40=K, 45=L, 50=M, 55=N, 60=P, 65=Q, 70=R, 75=S, 80=T, 85=U, 90=V, 95=W, 100=X.

Pre-packed air hose



Whip Hose

HOSE

RUBBER ALLOY AIR HOSE

- Available in selected lengths up to 100 metres maximum *
- Conforms to ISO 5774-1980 (BS6066-1981) exceeds BS 5118

Part No.	Description	Working Pressure lbf/in ² (bar)	Min.Burst Pressure lbf/in ² (bar)
HS20*01	5mm x 12mm (3/16") I. D.	200 (15)	800 (45)
HS21*01	5mm x 14mm (3/16") I. D.	300 (20)	1200 (60)
HS22*01	7mm x 14mm (1/4") I. D.	200 (15)	800 (45)
HS23*01	7mm x 16mm (1/4") I. D.	300 (20)	1200 (60)
HS24*01	8mm x 16mm (5/16") I. D.	200 (15)	800 (45)
HS25*01	10mm x 17mm (3/8") I. D.	200 (15)	800 (45)
HS26*01	10mm x 19mm (3/8") I. D.	300 (20)	1200 (60)
HS27*01	13mm x 21mm (1/2") I. D.	200 (15)	800 (45)

PRE-CUT AND PRE-PACKED RUBBER ALLOY AIR HOSE

- To product standard: ISO 5744:1980
- All hose assemblies packed in polythene bag with header card
- 7 mm (1/4") & 8 mm (5/16") hose assemblies fitted with two Rp 1/4 (F) union nuts. 10 mm (3/8") hose assemblies fitted with two Rp 3/8 (F) union nuts. 3 mm (1/2") hose assemblies fitted with two Rp 1/2 (F) union nuts

Part No.	Description
HA2011	5 mtr. Rp 1/4 fitting 1/4" hose
HA2016	10 mtr. Rp 1/4 fitting 1/4" hose
HA2020	15 mtr. Rp 1/4 fitting 1/4" hose
HA2001	20 mtr. Rp 1/4 fitting 1/4" hose
HA2012	5 mtr. Rp 1/4 fitting 5/16" hose
HA2017	10 mtr. Rp 1/4 fitting 5/16" hose
HA2021	15 mtr. Rp 1/4 fitting 5/16" hose
HA2002	20 mtr. Rp 1/4 fitting 5/16" hose
HA2013	5 mtr. Rp 3/8 fitting 3/8" hose
HA2018	10 mtr. Rp 3/8 fitting 3/8" hose
HA2022	15 mtr. Rp 3/8 fitting 3/8" hose
HA2003	20 mtr. Rp 3/8 fitting 3/8" hose
HA2014	5 mtr. Rp 1/2 fitting 1/2" hose
HA2019	10 mtr. Rp 1/2 fitting 1/2" hose
HA2023	15 mtr. Rp 1/2 fitting 1/2" hose
HA2004	20 mtr. Rp 1/2 fitting 1/2" hose

AIR TOOL WHIP HOSE

- These are used to supply air between the air tool and supply point which avoids vibration damage to couplings

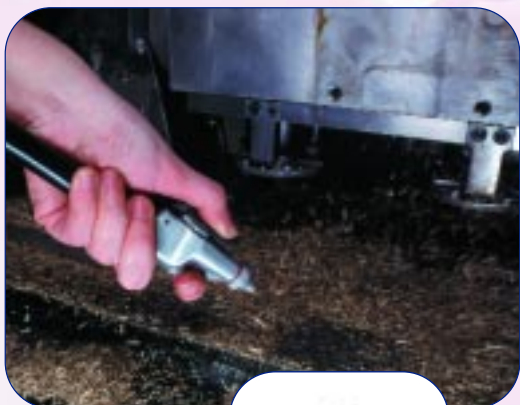
Part No.	Description
HA2108	0.6m (2ft) 7mm x 14mm Whip Hose with Standard Adaptor R 1/4.
HA2109	0.6m (2ft) 10mm x 17mm Whip Hose with Standard Adaptor and R 3/8.
HA2116	0.6m (2ft) 13mm x 21mm Whip Hose with 100 Series Adaptor and R 1/2.
HA2112	10m Hose x 1/4" bore with male Standard Adaptor and R 1/4.
HA2113	20m Hose x 1/4" bore with male Standard Adaptor and R 1/4.
RHA2036	10m Hose x 3/8" bore with male Standard Adaptor and R 1/4.
RHA2037	20m (66ft) 10mm x 17mm hose with male Standard Adaptor
HA2110	10m (33ft) 13mm x 21mm hose with male 100 Series Adaptor.
HA2111	20m (66ft) 13mm x 21mm hose with male 100 Series Adaptor.

AIR TOOLS

AIR TOOLS



Coiled Hose Assemblies

Metal
Blowguns

Metal Blowguns



Pistol Grip Blowguns



Blowgun Nozzles



Plastic Blowguns



Air and Water Gun

COILED HOSE ASSEMBLIES

- Superior strength nylon coiled hose with either 1/4" or 3/8" fittings
- Swivel feature helps prevent hose kinking and air blockage
- Polyurethane hose with 1/4" fitting also available

Part No. Description

HA5201	Nylon Hose 6mm bore x 8mm OD 7.62m (25ft) working length with R 1/4 male swivel ends (360°)
HA5203	Nylon Hose 3/8" bore x 1/2" OD 7.62m (25ft) working length with R 3/8 male swivel ends (360°)
HA5204	Polyurethane Hose 6mm bore x 10mm OD 4.57 m (15ft) working length with R 1/4 male swivel ends (360°)
HA5206	Polyurethane Hose 6mm bore x 8mm OD 2m(6ft) working length with R 1/4 swivel ends (360°)
HA5207	Polyurethane Hose 6mm bore x 10.0 OD 8.5m(27ft) working length with R 1/4 swivel ends (360°)
HA5208	Nylon Hose 6mm bore x 10mm OD 10m(32ft) working length with R 1/4 swivel ends (360°)

BLOWGUNS

- Manufactured from high quality die-cast alloy
- Inlet thread Rp 1/4
- Safety nozzle restricts flow to Health and Safety requirements (28psi)
- Brass valve assembly

Part No. Description

BG105	Blowgun with conical nozzle
BG106	Blowgun with safety nozzle
BG305	Pistol grip blowgun with conical nozzle
BG306	Pistol grip blowgun with safety nozzle

BLOWGUN NOZZLES

- A full range of nozzles is available

Part No. Description

BGN462	Booster Nozzle
BGN463	Syphon spray nozzle
BGN466	230mm (9") extension nozzle
BGN461	Safety Nozzle
BGN4088	Conical Nozzle

PLASTIC BLOWGUN

- Moulded plastic body resists damage, staining and contamination
- 100% brass inner valve allows adjustable airflow
- Suitable for air and water applications
- Ergonomic grip for comfortable easy use, individually blister packed
- Safety fully complies with Health and Safety Standards

Part No. Description

BG5002	Pistol grip blowgun
BG5003	Pistol grip blowgun with safety Nozzle

AIR AND WATER GUN

- The air and water gun provides an effective and economical solution to many cleaning problems without damaging the surface beneath
- Tailpieces included 1/2" bore for water, 1/4" bore for air
- Air usage 4.5ft³/min (127 l/min)

Part No. Description

AWG01	Adjustable air and water jet dispenser
-------	--



Water Dispensers



Syphon Spray Gun



Airvac



Series 8

Series 4



Hose Clips

AIR TREATMENT

WATER DISPENSERS

- Water dispensers are suitable as radiator fillers
- Suitable for water and many other liquids

Part No. Description

RF102	Water dispenser, lever model
RF201	Water dispenser, screw-down model

SYPHON SPRAY GUN

- Can be used to spray paraffin, wax-oil and other light liquids
- One litre capacity container and an adjustable nozzle for accurate flow

Part No. Description

SSG01	Metal spray dispenser with 1 litre container.
-------	---

AIRVACS

- The Airvac vacuum cleaner is designed to meet a wide range of industrial applications
- The special nozzle prevents blow-back of dust - an important safety feature

Part No. Description

AV101	Garage model, with dust bag.
AV201	Industrial model, with 1.8m(6ft) flexible hose.

AIR TREATMENT RANGE SERIES 4 & 8

- Excellent water removal efficiency with simple adjustment of delivery rate
- Robust 'depth' type filter element
- Full flow gauge ports to give piping flexibility

Part No. Description

ATF8M	1/2" Filter
ATR8	1/2" Regulator
ATL8	1/2" Lubricator
ATC8M	1/2" Filter/Regulator
ATG8	Gauge 0-160 lbf/in ² and 0-11 BAR 1/4" BSP
ATR4	1/4" Mini Regulator
ATC4M	1/4" Mini Filter/Regulator
ATG4	Gauge 0-160 lbf/in ² and 0-11 BAR 1/8" BSP

AIR TREATMENT KITS

Part No. Description

ATK40	1/4" Angle Bracket
ATK80	1/2" Angle Bracket
ATK81	1/2" Auto Drain Kit
HC6898	R 1/2 Double Union to join 1/2" Series

WORM DRIVE HOSE CLIPS

Part No.	Diameter range	Quantity
HDC12/M	9.5-12mm 3/8"-1/2"	20
HDC16/M	11-16mm 1/2"-5/8"	20
HDC20/M	13-20mm 1/2"-3/4"	20
HDC22/M	14-22mm 5/8"-7/8"	20

For more information



Pneumatic Components Ltd

Holbrook Rise,
Holbrook Industrial Estate,
Sheffield, S20 3GE

Direct Sales Line 0114 247 8368
Facsimile 0114 247 8342
Email sales@pcl.org.uk

www.pcl.org.uk

