



Hose, Tubes & Ducting



Together, we can turn fluid leaks into history and increase your efficiency



Parker fluid connector technology is safe, proven, reliable and leak-free.

Designed for the highest pressures, the toughest environments and the most intricate and delicate operations, Parker's range of fluid connectors, hoses and support equipment makes it quick, simple and cost effective for you to build, develop and maintain your fluid power systems and machinery.

To learn how we can help you make fluid leaks a thing of the past talk to Brammer today.

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding




ENGINEERING YOUR SUCCESS.

www.parker.com



Together, we can power your business into the future



Parker and Brammer: a partnership that brings your business the technologies, experience and international resources that it needs to succeed.

Technologies that cut your machine build and operating costs; technologies that help you develop new and innovative solutions.

Technologies that ensure you out perform your competitors and exceed your customers' expectations, day after day, year after year.

To find out how we can power your business into the future contact Brammer today.

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding




ENGINEERING YOUR SUCCESS.

www.parker.com

Masterflex Hose

Flamex B-F se

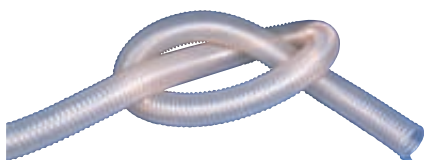

- Polyester polyurethane ducting
- Reinforced with encapsulated copper coated high tensile steel wire helix
- PU thickness = 0.5mm
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10m lengths

Properties and Applications

- Conforms to DIN 4102 B1 flame retardancy standard
- Abrasion resistant
- Very flexible and lightweight
- Use for the extraction of sawdust, wood chips on woodworking machines
- Suitable for powder transportation (gravity drop)
- Full range of connectors and reducers available


Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
310-038-1000	38	0.90	2500	19	0.25
310-050-1000	50	0.80	2000	25	0.3
310-060-1000	60	0.76	1900	30	0.4
310-065-1000	65	0.68	1600	33	0.45
310-070-1000	70	0.61	1600	35	0.45
310-075-1000	75	0.61	1300	38	0.45
310-080-1000	80	0.53	1300	40	0.45
310-090-1000	90	0.46	950	45	0.6
310-100-1000	100	0.46	950	50	0.65
310-110-1000	110	0.38	950	55	0.7
310-115-1000	115	0.38	950	58	0.7
310-120-1000	120	0.38	950	60	0.7
310-125-1000	125	0.38	950	63	0.8
310-130-1000	130	0.30	950	65	0.8
310-140-1000	140	0.30	650	70	0.8
310-150-1000	150	0.30	650	75	0.85
310-160-1000	160	0.30	650	80	0.95
310-180-1000	180	0.23	650	90	1.05
310-200-1000	200	0.23	650	100	1.15
310-225-1000	225	0.15	300	113	1.5
310-250-1000	250	0.15	300	125	1.8
310-300-1000	300	0.14	285	150	1.95
310-315-1000	315	0.14	285	158	1.95
310-350-1000	350	0.12	250	175	2.4
310-400-1000	400	0.12	250	200	2.6

Price per Length

Order Code	Product Code	1+
WXF9029	310-038-1000	£113.93
WXF9030	310-050-1000	£136.22
WXF9031	310-060-1000	£141.18
WXF9032	310-065-1000	£142.46
WXF9033	310-070-1000	£143.65
WXF9034	310-075-1000	£144.95
WXF9035	310-080-1000	£146.12
WXF9036	310-090-1000	£151.08
WXF9037	310-100-1000	£153.55
WXF9038	310-110-1000	£167.24
WXF9039	310-115-1000	£168.42
WXF9040	310-120-1000	£169.71
WXF9041	310-125-1000	£173.36
WXF9042	310-130-1000	£182.09
WXF9043	310-140-1000	£185.76
WXF9044	310-150-1000	£188.22
WXF9045	310-160-1000	£190.71
WXF9046	310-180-1000	£220.43
WXF9047	310-200-1000	£226.67

Order Code	Product Code	1+
WXF9048	310-225-1000	£252.62
WXF9049	310-250-1000	£272.43
WXF9050	310-300-1000	£338.13
WXF9051	310-315-1000	£354.16
WXF9052	310-350-1000	£382.71
WXF9053	310-400-1000	£450.75

Hose Connectors

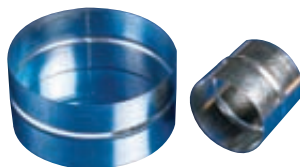

- Material - Galvanised steel
- Lightweight and easy to install
- Resistant to corrosion
- Use for extending, connecting and attaching lightweight or medium weight hoses
- Particularly recommended for Flamex BF

Order Code	Product Code	Size (mm)	1+
WXF9122	630-075-0000	75	£9.39
WXF9123	630-100-0000	100	£9.83
WXF9124	630-125-0000	125	£10.65
WXF9125	630-150-0000	150	£11.63
WXF9126	630-200-0000	200	£14.25
WXF9127	630-250-0000	250	£16.05

Hose Reducers



- Material - Galvanised steel
- Lightweight and easy to install
- Resistant to corrosion
- Use for extending, connecting and attaching light weight or medium weight hoses
- Particularly recommended for Flamex BF

Price Each

Order Code	Product Code	Size (mm)	1+
WXF9128	632-125-100	125-100	£40.44
WXF9129	632-150-100	150-100	£57.11
WXF9130	632-200-100	200-100	£69.41
WXF9131	632-200-125	200-125	£69.41
WXF9132	632-200-150	200-150	£69.41

Master-PUR L



- Polyester polyurethane hose
- Reinforced with embedded copper coated high tensile steel wire helix
- PU thickness = 0.7mm
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10m lengths

Properties and Applications

- Extremely abrasion resistant, lightweight and highly flexible
- Smooth bore gives good flow characteristics
- Resistant to oils and fuels
- Good chemical resistance
- Use for the transportation of dust, powders, paper and textile fibres
- Suitable for oil mist extraction
- Ideal as a protection hose against mechanical pressure

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
110-038-1000	38	2.10	6750	46	0.39
110-050-1000	50	1.68	5250	58	0.45
110-065-1000	65	1.26	3750	73	0.64
110-075-1000	75	1.12	3000	84	0.72
110-100-1000	100	0.84	2250	110	0.95
110-150-1000	150	0.56	1500	161	1.48
110-200-1000	200	0.42	1500	214	2.3

Price per Length

Order Code	Product Code	1+
WXF9163	110-038-1000	£161.62
WXF9164	110-050-1000	£172.82
WXF9165	110-065-1000	£197.82
WXF9166	110-075-1000	£217.37
WXF9167	110-100-1000	£286.88
WXF9168	110-150-1000	£423.37
WXF9169	110-200-1000	£578.62

Polyurethane Cuffs - to suit Master PUR L Hose.

Price Each

Order Code	Product Code	Size (mm)	1+
WXF9170	540L-038-0000	38	£31.61
WXF9171	540L-050-0000	50	£35.14
WXF9172	540L-065-0000	65	£36.09
WXF9173	540L-075-0000	75	£36.80
WXF9174	540L-100-0000	100	£61.56

**For the full range of
Norgren products, see
our Pneumatics
section**



Master-PUR H



- Polyester polyurethane hose
- Reinforced with embedded copper coated high tensile steel wire helix
- PU thickness = 1.4mm
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10m lengths

Properties and Applications

- Extremely abrasion resistant, lightweight and highly flexible
- Smooth bore gives good flow characteristics
- Improved pressure and vacuum characteristics over Master PUR-L
- Use for pneumatic conveying of abrasive powders and granules and glass filled materials
- The standard hose for industrial vacuum cleaners

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
111-038-1000	38	3.12	8400	69	0.46
111-050-1000	50	2.90	8000	87	0.71
111-065-1000	65	2.40	6750	112	0.91
111-075-1000	75	2.00	6000	126	1.06
111-100-1000	100	1.50	4500	165	1.48
111-150-1000	150	1.05	2500	242	2.29
111-200-1000	200	0.75	1875	321	3.3

Price per Length

Order Code	Product Code	1+
WXF9175	111-038-1000	£206.15
WXF9176	111-050-1000	£245.19
WXF9177	111-065-1000	£308.40
WXF9178	111-075-1000	£341.19
WXF9179	111-100-1000	£533.78
WXF9180	111-150-1000	£822.84
WXF9181	111-200-1000	£1116.98

Polyurethane Cuffs - to suit Master PUR H Hose.

Price Each

Order Code	Product Code	Size (mm)	1+
WXF9191	541H-038-0000	38	£26.33
WXF9192	541H-050-0000	50	£29.28
WXF9193	541H-065-0000	65	£29.75
WXF9194	541H-075-0000	75	£30.67
WXF9195	541H-100-0000	100	£51.31

Master-PUR HX



- Polyester polyurethane hose
- Reinforced with embedded high tensile steel wire helix
- PU thickness = 2.1mm
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10m lengths

Properties and Applications

- Extremely abrasion resistant by selective reinforcement below the spiral
- Highest demands of service life and abrasion resistance
- Use for silo loading of sand, gravel and grain
- Ideal for use with glass wool

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
114-050-1000	50	4.00	9600	125	1.04
114-075-1000	75	2.92	9100	190	1.5
114-100-1000	100	2.10	8900	250	2.6
114-150-1000	150	1.50	8370	450	4.13

Price per Length

Order Code	Product Code	1+
WXF9182	114-050-1000	£375.87
WXF9183	114-075-1000	£534.96
WXF9184	114-100-1000	£840.89
WXF9185	114-150-1000	£1275.48

Polderflex PUR



- Polyester polyurethane smooth bore suction and transport hose
- Reinforced with embedded high tensile steel wire helix
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10 metre lengths

Properties and Applications

- Smooth inside and outside
- Extremely abrasion resistant
- Ideal for the highest demand of service life and abrasion resistance

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
118-032-1000	32	5.75	9500	160	0.88
118-038-1000	38	5.62	9500	190	1.03
118-040-1000	40	5.50	9500	200	1.07
118-045-1000	45	5.37	9500	225	1.20
118-051-1000	51	5.25	9500	250	1.25
118-060-1000	60	5.12	9500	300	1.44
118-076-1000	76	5.00	9500	380	1.92

Price per Length

Order Code	Product Code	1+
WXF28591	118-032-1000	£266.45
WXF28592	118-038-1000	£310.13
WXF28593	118-040-1000	£318.86
WXF28594	118-045-1000	£334.15
WXF28595	118-051-1000	£355.99
WXF28596	118-060-1000	£434.62
WXF28597	118-076-1000	£504.50

Streetmaster-LF



- Microbe resistant polyester polyurethane hose
- Reinforced with a PVC coated high tensile steel wire helix
- Wall thickness = 1.0mm
- Colour - Black
- Temp. range -40°C to +70°C (Intermittent to +80°C)
- Supplied in 10 metre lengths

Properties and Applications

- Extremely abrasion resistant
- Very flexible
- Microbe protection
- UV and ozone resistant
- Suction and wander hose for industrial, road and precinct sweeping machines, leaf collecting and grass cutting machines

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
313-100-1000	100	0.50	1000	75	0.7
313-125-1000	125	0.40	1000	90	1
313-150-1000	150	0.35	750	100	1.2
313-160-1000	160	0.35	750	105	1.4
313-180-1000	180	0.30	750	120	1.5
313-200-1000	200	0.25	750	125	1.6

Price per Length

Order Code	Product Code	1+
WXF9196	313-100-1000	£208.42
WXF9197	313-125-1000	£256.83
WXF9198	313-150-1000	£309.46
WXF9199	313-160-1000	£324.19
WXF9200	313-180-1000	£397.88
WXF9201	313-200-1000	£418.93

**For hose reels,
see our Process
section**



ATEX Compliant Hoses

Master PUR L EL



- Polyester polyurethane hose
- Reinforced with copper coated high tensile steel wire helix
- Electrically conductive $\leq 10^4$ ohms
- PU thickness = 0.7mm
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10 metre lengths

Properties and Applications

- Suction and transport hose for abrasive materials
- Electrically conductive
- Conforms to ATEX standard

Size mm	Product Code	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
38	110E-038-1000	2.10	6750	46	0.39
50	110E-050-1000	1.68	5250	58	0.45
65	110E-065-1000	1.26	3750	73	0.64
75	110E-075-1000	1.12	3000	84	0.72
100	110E-100-1000	0.84	2250	110	0.95

Price per Length

Order code	Product code	1+
WXF33572	110E-038-1000	£197.59
WXF33573	110E-050-1000	£212.40
WXF33574	110E-065-1000	£243.01
WXF33575	110E-075-1000	£276.00
WXF33576	110E-100-1000	£350.95

Master-PUR H-EL



- Polyester polyurethane hose
- Reinforced with embedded high tensile steel wire helix
- PU thickness 1.4mm
- Surface resistance $\leq 10^4$ ohms
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10 metre lengths

Properties and Applications


- Suction and transport hose for abrasive materials
- Special hose for industrial vacuum cleaners
- Electrically conductive
- Conforms to ATEX standard

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
111E-038-1000	38	3.12	8400	69	0.46
111E-050-1000	50	2.90	8000	87	0.71
111E-065-1000	65	2.40	6750	112	0.91
111E-075-1000	75	2.00	6000	126	1.06
111E100-1000	100	1.50	4500	165	1.48

Price per Length

Order Code	Product Code	1+
WXF9186	111E-038-1000	£268.41
WXF9187	111E-050-1000	£318.54
WXF9188	111E-065-1000	£411.54
WXF9189	111E-075-1000	£443.81
WXF9190	111E100-1000	£686.38

Master-Clip Vinyl EL

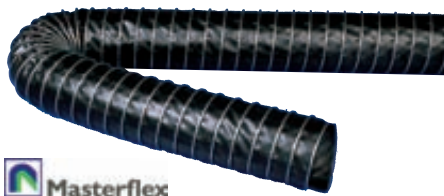

- PVC coated polyester fabric ducting
- Reinforced with external galvanised steel helix
- Electrically conductive $\leq 10^6$ ohms
- Temp. range -20°C to +70°C (Intermittent to +80°C)
- Supplied in 10 metre lengths

Properties and Applications


- Very flexible and lightweight
- External helix protects against abrasion
- Electrically conductive
- Conforms to ATEX standard
- Ideal for dust and fume extraction

Size (mm)	Product Code	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
50	260-050-1000	0.90	3200	30	0.55
75	260-075-1000	0.62	1400	45	0.79
100	260-100-1000	0.51	1000	60	1.12
150	260-150-1000	0.22	440	90	2.95
200	260-200-1000	0.14	250	120	3.90

Price per Length

Order Code	Product Code	1+
WXF28579	260-050-1000	£170.72
WXF28580	260-075-1000	£253.84
WXF28581	260-100-1000	£317.86
WXF28582	260-150-1000	£593.61
WXF28583	260-200-1000	£837.54

Master-Clip TEFLON® H-EL

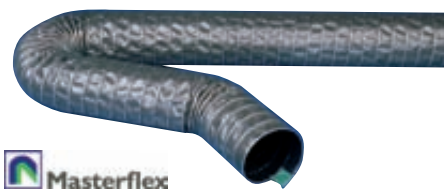

- Inner layer PTFE film with electrically conductive outer layer
- Hypalon coated polyester fabric
- Reinforced with external galvanised steel helix
- Surface resistance $\leq 10^4$ ohms
- Temp. range -40°C to +175°C (Intermittent to +190°C)
- Supplied in 3 metre lengths - longer lengths available on request

Properties and Applications


- Very flexible
- External steel helix protects against abrasion
- An ideal extractor of all known chemical vapours including corrosive gases and solvents
- UV and ozone resistant
- Vibration proof
- Electrically conductive
- Conforms to ATEX standard

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
261-050-0300	50	0.90	4400	30	0.5
261-075-0300	75	0.62	1960	45	0.8
261-100-0300	100	0.51	1100	60	1
261-150-0300	150	0.22	490	90	1.3

Price per Length

Order Code	Product Code	1+
WXF9054	261-050-0300	£202.83
WXF9055	261-075-0300	£236.27
WXF9056	261-100-0300	£282.16
WXF9057	261-150-0300	£405.50

Master-PUR LF FOOD

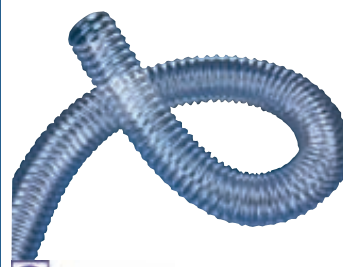

- Polyester polyurethane FDA approved ducting
- Reinforced with an encapsulated stainless steel high tensile wire helix
- PU thickness - 0.5mm
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10m lengths

Properties and Applications


- The raw materials used in the manufacture of this product complies with the relevant EC and FDA directives
- Ideal for the extraction of solid and gaseous media in the food, pharmaceutical and chemical industry

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
310F-075-1000	75	0.61	1300	38	0.45
310F-100-1000	100	0.46	950	50	0.65
310F-150-1000	150	0.30	650	75	0.85
310F-200-1000	200	0.23	650	100	1.52

Price per Length

Order Code	Product Code	1+
WXF9206	310F-075-1000	£217.94
WXF9207	310F-100-1000	£230.33
WXF9208	310F-150-1000	£281.16
WXF9209	310F-200-1000	£339.30

Master-PUR L FOOD

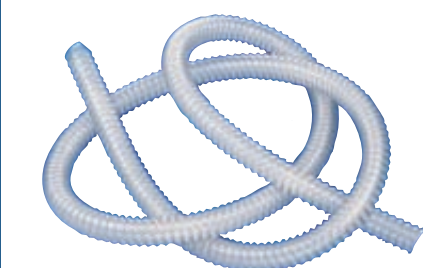

- Polyether polyurethane FDA approved hose
- Reinforced with an embedded stainless steel wire helix
- PU thickness = 0.7mm
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10m lengths

Properties and Applications


- The raw materials used in the manufacture of this product complies with the relevant EC and FDA directives
- Suction and transport hose for solid, liquid and gaseous media in the food, pharmaceutical and chemical industry.

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
110F-050-1000	50	2.90	8000	90	0.71
110F-075-1000	75	2.00	6000	125	1.03
110F-100-1000	100	1.50	4500	165	1.3
110F-150-1000	150	1.05	2500	245	1.92

Price per Length

Order Code	Product Code	1+
WXF9202	110F-050-1000	£256.39
WXF9203	110F-075-1000	£321.97
WXF9204	110F-100-1000	£424.81
WXF9205	110F-150-1000	£627.89

Master-PUR H FOOD



- Polyether polyurethane FDA approved hose
- Reinforced with an embedded stainless steel wire helix
- PU thickness = 1.4mm
- Temp. range -40°C to +90°C (Intermittent to +125°C)
- Supplied in 10m lengths

Properties and Applications

- The raw materials used in the manufacture of this product complies with the relevant EC and FDA directives
- Suction and transport hose for solid, liquid and gaseous media in the food, pharmaceutical and chemical industry

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
111F-050-1000	50	2.90	8000	90	0.71
111F-075-1000	75	2.00	6000	125	1.03
111F-100-1000	100	1.50	4500	165	1.3
111F-150-1000	150	1.05	2500	245	1.92

Price per Length

Order Code	Product Code	1+
WXF9210	111F-050-1000	£367.85
WXF9211	111F-075-1000	£511.50
WXF9212	111F-100-1000	£799.97
WXF9213	111F-150-1000	£1234.68

Polderflex



- Smooth bore suction and transport hose
- Non-toxic clear flexible PVC
- Reinforced with an embedded high tensile steel wire helix

- Supplied in 30 metre (12mm-76mm) and 20 metre (102mm) lengths

Properties and Applications


- Good chemical resistance
- Good resistance to oils, alkalis and acids
- Use for the suction and discharge of water, slurry and sewage
- Suitable for granular transportation particularly foodstuffs

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
660-012-3000	12	10.00	9000	19	0.21
660-020-3000	20	8.00	9000	27	0.31
660-025-3000	25	8.00	8500	33	0.52
660-032-3000	32	8.00	8500	80	0.68
660-038-3000	38	7.00	8500	92	0.8
660-051-3000	51	5.00	8000	124	1.3
660-063-3000	63	5.00	7000	150	1.8
660-076-3000	76	5.00	6000	182	2.25
660-102-2000	102	3.00	5500	232	3.65

Price per Length

Order Code	Product Code	1+
WXF9146	660-012-3000	£76.42
WXF9147	660-020-3000	£121.32
WXF9148	660-025-3000	£176.41
WXF9149	660-032-3000	£236.60
WXF9150	660-038-3000	£279.27
WXF9151	660-051-3000	£392.30
WXF9152	660-063-3000	£619.35
WXF9153	660-076-3000	£603.74
WXF9154	660-102-2000	£652.14

Master-Clip VINYL-B

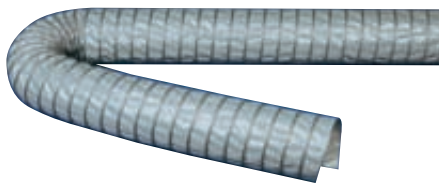

- PVC coated polyester fabric ducting
- Reinforced with an external galvanised steel helix
- Temp. range -20°C to +70°C (Intermittent to +80°C)
- Supplied in 10 metre lengths

Properties and Applications


- Highly flexible and lightweight
- External steel helix protects against abrasion
- Use for air conditioning, ventilation, dust and fume extraction
- Particularly useful for weld fume extraction
- Note - The UK supplied product is Blue in colour

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
212-050-1000	50	0.90	3200	30	0.40
212-075-1000	75	0.62	1400	45	0.60
212-100-1000	100	0.51	800	60	0.60
212-125-1000	125	0.33	500	75	0.80
212-150-1000	150	0.22	360	90	0.90
212-160-1000	160	0.21	310	96	0.90
212-200-1000	200	0.14	200	120	1.20
212-225-1000	225	0.11	160	135	1.40
212-250-1000	250	0.10	130	175	1.60
212-300-1000	300	0.07	90	210	2.10

Price per Length

Order Code	Product Code	1+
WXF9077	212-050-1000	£51.83
WXF9078	212-075-1000	£82.45
WXF9079	212-100-1000	£110.20
WXF9080	212-125-1000	£136.68
WXF9081	212-150-1000	£161.33
WXF9082	212-160-1000	£172.80
WXF9083	212-200-1000	£214.31
WXF33073	212-225-1000	£252.80
WXF33074	212-250-1000	£285.01
WXF33075	212-300-1000	£338.19

For Hygienic valves, see our Process section

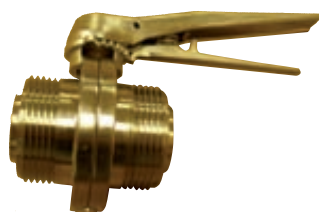

Master-Clip SPARK



- PVC coated glass fabric ducting
- Reinforced with an external galvanised steel helix
- Temp. range -20°C to +90°C (Intermittent to +110°C)
- Supplied in 10 metre lengths

Properties and Applications


- Highly flexible and compressible
- Outer helix protects against abrasion
- Fire retardant to M1 standard
- Use for weld fume extraction in all industries

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
215-075-1000	75	0.47	1400	45	0.60
215-100-1000	100	0.30	800	60	0.60
215-150-1000	150	0.16	360	90	0.90
215-160-1000	160	0.14	310	96	0.90
215-200-1000	200	0.09	200	120	1.20
215-250-1000	250	0.06	130	175	1.60

Price per Length

Order Code	Product Code	1+
WXF28598	215-075-1000	£140.87
WXF28599	215-100-1000	£156.48
WXF28600	215-150-1000	£228.77
WXF28601	215-160-1000	£232.92
WXF28602	215-200-1000	£257.61
WXF28603	215-250-1000	£324.43

Master-Clip NEOPREN

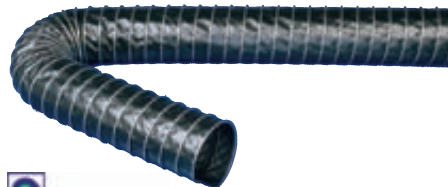

- Neopren coated polyester fabric ducting
- Reinforced with external galvanised steel helix
- Temp. range -35°C to +125°C (Intermittent to +150°C)
- Supplied in 10 metre lengths

Properties and Applications

- Highly flexible and lightweight
- External steel helix protects against abrasion
- Improved temperature resistance
- UV and ozone resistant
- Use for ducting of hot and cold air
- Vibration proof

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
220-050-1000	50	0.90	4000	30	0.4
220-075-1000	75	0.62	1780	45	0.6
220-100-1000	100	0.51	1000	60	0.6
220-125-1000	125	0.33	640	75	0.8
220-150-1000	150	0.22	440	90	0.9
220-160-1000	160	0.21	390	96	0.9
220-200-1000	200	0.14	250	120	1.2

Price per Length

Order Code	Product Code	1+
WXF9070	220-050-1000	£137.82
WXF9071	220-075-1000	£201.12
WXF9072	220-100-1000	£266.13
WXF9073	220-125-1000	£350.41
WXF9074	220-150-1000	£413.01
WXF9075	220-160-1000	£415.99
WXF9076	220-200-1000	£511.05

Master-Clip ISO NEOPREN



- 2 ply neoprene coated polyester fabric ducting
- Reinforced with external galvanised steel helix
- Temp. range -35°C to +125°C
- Supplied in 10 and 6 metre lengths
- **Note: Masterclip ISO Neopren supersedes the Wyrem hose**

Properties and Applications


- Very flexible and robust
- Kink proof
- Ideal for air, dust and fume extraction in all industries

Product Code	Size (mm)	Min. Bend (mm)	Weight (kg/m)
231-050-1000	51	30	0.53
231-065-1000	64	40	0.68
231-075-1000	76	45	0.80
231-100-1000	102	60	1.30
231-125-1000	127	75	1.40
231-150-1000	152	90	1.80
231-203-6000	203	120	2.40

Price per Length

Order Code	Product Code	Length (m)	1+
WXF33076	231-050-1000	10	£130.87
WXF33077	231-065-1000	10	£157.53
WXF33078	231-075-1000	10	£174.50
WXF33079	231-100-1000	10	£218.12
WXF33080	231-125-1000	10	£298.09
WXF33081	231-150-1000	10	£380.50
WXF33082	231-203-6000	6	£385.34

Master-Clip HYPALON®

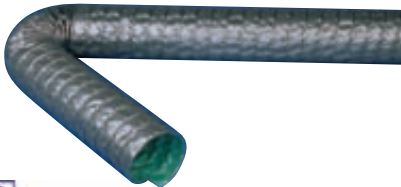

- Hypalon coated polyester fabric ducting
- Reinforced with external galvanised steel helix
- Temp. range -40°C to +175°C (Intermittent to +190°C)
- Supplied in 10 metre lengths

Properties and Applications


- Very flexible and lightweight
- External steel helix protects against abrasion
- UV and ozone resistant
- Use for hot and cold air, extraction of corrosion media, granular dryers and engine exhaust gases
- Vibration proof

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
221-050-1000	50	0.90	4000	30	0.4
221-065-1000	65	0.68	2370	39	0.5
221-075-1000	75	0.62	1780	45	0.6
221-100-1000	100	0.51	1000	60	0.6
221-125-1000	125	0.33	640	75	0.8
221-150-1000	150	0.22	440	90	0.9

Price per length

Order Code	Product Code	1+
WXF9064	221-050-1000	£150.49
WXF9065	221-065-1000	£194.49
WXF9066	221-075-1000	£217.94
WXF9067	221-100-1000	£281.16
WXF9068	221-125-1000	£379.52
WXF9069	221-150-1000	£437.78

Master-Clip SILICON

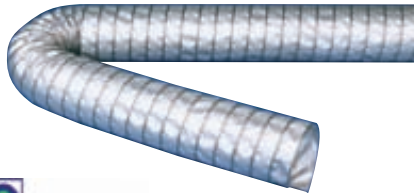

- High temperature ducting manufactured from silicone coated glass fabric
- Reinforced with external galvanised steel helix
- Temp. range -60°C to +300°C (Intermittent to +350°C)
- Supplied in 10 metre lengths

Properties and Applications

- High temperature resistance
- Very flexible and lightweight
- Flame retardant
- External steel helix protects against abrasion
- Suitable for use with hot air and engine exhaust gases

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
223-050-1000	50	0.85	3200	30	0.4
223-065-1000	65	0.59	1900	39	0.5
223-075-1000	75	0.47	1400	45	0.6
223-100-1000	100	0.30	800	60	0.6
223-125-1000	125	0.21	500	75	0.8
223-150-1000	150	0.15	360	90	0.9

Price per Length

Order Code	Product Code	1+
WXF9058	223-050-1000	£258.88
WXF9059	223-065-1000	£299.68
WXF9060	223-075-1000	£365.36
WXF9061	223-100-1000	£440.26
WXF9062	223-125-1000	£573.40
WXF9063	223-150-1000	£690.99

Clip-Grip Hose Clamp



- Special hose clamp for Master-Clip ducting
- Non-rusting
- Easy to install
- Robust
- High tensile strength connection due to bridge profiles

Price Each

Order Code	Product Code	Size (mm)	1+
WXF9138	530-050-0000	50	£4.47
WXF9139	530-065-0000	65	£5.31
WXF9140	530-075-0000	75	£5.90
WXF9141	530-100-0000	100	£7.07
WXF9142	530-125-0000	125	£7.58
WXF9143	530-150-0000	150	£9.60
WXF9144	530-160-0000	160	£10.18
WXF9145	530-200-0000	200	£12.90
WXF33087	530-225-0000	225	£18.64
WXF33088	530-250-0000	250	£22.92
WXF33089	530-300-0000	300	£28.19

Clip-Grip Quick Release Hose Clamp



- Special hose clamp for Master-Clip ducting
- Non-rusting
- Easy to install
- Robust
- High tensile strength connection due to bridge profile
- Also subsequent rapid assembly with already installed hoses possible
- Non-standard adjustment of the stress by tightening screw possible

Price Each

Order Code	Product Code	Size (mm)	1+
WXF9133	532-100-0000	100	£23.75
WXF9134	532-125-0000	125	£24.57
WXF9135	532-150-0000	150	£25.56
WXF9136	532-160-0000	160	£26.86
WXF9137	532-200-0000	200	£29.48

Carflex Super



- Crush recoverable hose constructed from polyester fabric with EPDM/PP
- Reinforced with a plastic helix
- Maximum standing temperature +150°C
- Supplied in 10 metre lengths

Properties and Applications

- Crush recoverable, can be driven over
- Very flexible and lightweight
- Suitable for the extraction of engine exhaust gases up to +200°C when used in conjunction with an extraction system
- Can be used on a reel or on the garage floor

Product Code	Size (mm)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
320-050-1000	50	3200	55	0.40
320-075-1000	75	2400	75	0.48
320-100-1000	100	1800	100	0.64
320-125-1000	125	1200	125	0.78
320-150-1000	150	500	150	0.93

Price per Length

Order Code	Product Code	1+
WXF33083	320-050-1000	£215.43
WXF33084	320-075-1000	£322.59
WXF9098	320-100-1000	£366.37
WXF9099	320-125-1000	£470.38
WXF33085	320-150-1000	£590.35

Master-Santo LF



- Santoprene ducting with a wire spiral reinforcement
- Temp. range -40°C to +130°C (Intermittent to +150°C)
- Supplied in 10 metre lengths

Properties and Applications

- Lightweight and flexible
- UV and ozone resistant
- Good chemical resistance to alkalis, acids and solvent vapours
- Extraction/transportation of hot air and fumes in general industrial applications where increased temperature resistance is required.
- Also suitable for the suction of steam

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
321-025-1000	25	1.70	4000	25	0.19
321-032-1000	32	1.50	3500	32	0.26
321-038-1000	38	1.40	3000	38	0.32
321-044-1000	44	1.30	2800	44	0.39
321-051-1000	51	1.30	2800	51	0.45
321-063-1000	63	1.00	2500	63	0.5
321-076-1000	76	0.80	2000	76	0.65
321-102-1000	102	0.60	1800	102	0.75
321-127-1000	127	0.60	1200	127	0.85
321-152-1000	152	0.50	1100	152	0.95
321-200-1000	203	0.45	1000	200	1.68

Price per Length

Order Code	Product Code	1+
WXF35404	321-025-1000	£92.40
WXF35405	321-032-1000	£92.60
WXF35406	321-038-1000	£101.40
WXF35407	321-044-1000	£114.00
WXF9116	321-051-1000	£117.94
WXF9117	321-063-1000	£141.29
WXF9118	321-076-1000	£171.01
WXF9119	321-102-1000	£217.94
WXF9120	321-127-1000	£267.48
WXF9121	321-152-1000	£319.60
WXF33086	321-200-1000	£436.92

Master-Vac A



- Crush resistant vacuum cleaner hose
- Surface resistance $\leq 10^{11}$ ohms
- Temp. range -40°C to +60°C (Intermittent to +70°C)
- Supplied in 15 metre lengths

Properties and Applications

- Very flexible and lightweight
- Suitable for domestic and industrial vacuum cleaners, dust extraction, weld fumes and cable protection

Product Code	Size (mm)	Weight (Kg/m)
670-025-1500	25	0.15
670-032-1500	32	0.22
670-038-1500	38	0.29
670-045-1500	45	0.37
670-051-1500	51	0.42

Price per Length

Order Code	Product Code	1+
WXF33115	670-025-1500	£60.65
WXF33116	670-032-1500	£76.38
WXF9159	670-038-1500	£108.50
WXF33117	670-045-1500	£146.02
WXF9160	670-051-1500	£155.67

PVC Cuffs to Suit

Order Code	Product Code	Size (mm)	1+
WXF33093	651-025-0000	25	£8.99
WXF33094	651-032-0000	32	£8.99
WXF9161	651-038-0000	38	£8.96
WXF33095	651-045-0000	45	£11.34
WXF9162	651-051-0000	51	£11.32

Master-Vac A-EL



- Crush resistant suction hose
- Electrically conductive
- Surface resistance $\leq 10^6$ ohms
- Temp. range -40°C to +60°C (Intermittent to +70°C)
- Supplied in 20 metre lengths

Properties and Applications

- Very flexible and lightweight
- Ideal for use with domestic and industrial vacuum cleaners
- Dust and fume extraction where the elimination of static build up is of prime importance

Product Code	Size (mm)	Weight (Kg/m)
670E-038-2000	38	0.29
670E-050-2000	50	0.42

Price per Length

Order Code	Product Code	1+
WXF28611	670E-038-2000	£227.14
WXF28612	670E-050-2000	£393.12

Anti-static PE Cuffs to suit Vac A-EL

Order Code	Product Code	Size (mm)	1+
WXF33577	651E-038-0000	38	£8.74
WXF33578	651E-051-0000	51	£12.23

Master-PVC FLEX



- Suction and transport hose constructed from two layers of soft PVC with yarn reinforcement
- Internally reinforced with a plastic coated spring steel wire helix
- Temp. range -20°C to +70°C (Intermittent to +80°C)
- Supplied in 15 metre lengths

Properties and Applications

- Extremely flexible and lightweight
- Use for domestic and industrial vacuum cleaners, dust extraction, weld fumes and cable protection

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
671-025-1500	25	1.70	2000	25	0.19
671-032-1500	32	1.50	2000	32	0.26
671-038-1500	38	1.40	2000	38	0.32
671-051-1500	51	1.30	1500	51	0.43
671-063-1500	63	1.00	1400	63	0.51
671-076-1000	76	0.80	1000	76	0.66
671-102-1000	102	0.60	800	102	0.96

Price per Length

Order Code	Product Code	1+
WXF33118	671-025-1500	£125.80
WXF33119	671-032-1500	£125.80
WXF9155	671-038-1500	£146.24
WXF9156	671-051-1500	£167.46
WXF33120	671-063-1500	£197.68
WXF33121	671-076-1000	£168.48
WXF33122	671-102-1000	£193.19

PVC Cuffs to Suit

Order Code	Product Code	Size (mm)	1+
WXF33096	652-025-0000	25	£6.74
WXF33097	652-032-0000	32	£7.64
WXF9157	652-038-0000	38	£8.49
WXF9158	652-051-0000	51	£8.96
WXF33098	652-063-0000	63	£20.89
WXF33099	652-076-0000	76	£32.12
WXF33100	652-102-0000	102	£47.17

For the full range of Legris products, see our Pneumatics section



Master-PVC LF-L



- Soft PVC suction and transport hose
- Reinforced with high tensile PVC coated steel wire helix
- Temp. range -20°C to +70°C (Intermittent to +80°C)
- Supplied in 10 metre lengths

Properties and Applications

- Extremely flexible and lightweight
- Good resistance to oils, alkalis and acids
- Good chemical resistance
- Use for solid, gaseous and liquid media
- Ideal for dust & fume extraction and cable protection

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (kg/m)
662L-025-1000	25	1.50	1800	13	0.15
662L-032-1000	32	1.30	1800	16	0.15
662L-038-1000	38	1.20	1800	20	0.20
662L-045-1000	45	1.10	1400	23	0.25
662L-051-1000	51	1.10	1300	23	0.30
662L-057-1000	57	1.00	1200	28	0.32
662L-063-1000	63	0.80	1200	31	0.35
662L-076-1000	76	0.60	800	38	0.60
662L-080-1000	80	0.50	700	38	0.65
662L-089-1000	89	0.50	600	45	0.70
662L-102-1000	102	0.40	600	50	0.75
662L-115-1000	115	0.20	400	58	0.80
662L-127-1000	127	0.20	300	64	0.85
662L-152-1000	152	0.20	200	76	0.90

Price per Length

Order Code	Product Code	1+
WXF9084	662L-025-1000	£37.59
WXF9085	662L-032-1000	£39.87
WXF9086	662L-038-1000	£48.62
WXF33101	662L-045-1000	£54.53
WXF9087	662L-051-1000	£58.03
WXF33102	662L-057-1000	£65.04
WXF9088	662L-063-1000	£66.94
WXF9089	662L-076-1000	£79.74
WXF33103	662L-080-1000	£87.85
WXF33104	662L-089-1000	£109.06
WXF9090	662L-102-1000	£125.62
WXF33105	662L-115-1000	£137.84
WXF33106	662L-127-1000	£145.41
WXF33107	662L-152-1000	£159.95

For Donaldson filters, see our new Filtration section



Master-PVC LF-M



- Soft PVC suction and transport hose
- Reinforced with high tensile PVC coated steel wire helix
- Temp. range -20°C to +70°C (Intermittent to +80°C)
- Supplied in 10 metre lengths

Properties and Applications

- Extremely flexible and lightweight
- Good resistance to oils, alkalis and acids
- Good chemical resistance
- Use for solid, gaseous and liquid media
- Improved pressure and vacuum characteristics on Master PVC-LF-L.
- Ideal for dust & fume extraction and cable protection

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (kg/m)
662M-025-1000	25	1.70	2000	14	0.15
662M-032-1000	32	1.50	2000	18	0.15
662M-038-1000	38	1.40	2000	22	0.25
662M-045-1000	45	1.30	1800	25	
662M-051-1000	51	1.30	1500	28	0.35
662M-057-1000	57	1.20	1400	30	
662M-063-1000	63	1.00	1400	34	0.45
662M-076-1000	76	0.80	1000	40	0.7
662M-080-1000	80	0.70	900	42	
662M-089-1000	89	0.70	900	48	
662M-102-1000	102	0.60	800	52	0.85
662M-115-1000	115	0.50	700	60	
662M-127-1000	127	0.40	600	66	
662M-152-1000	152	0.30	500	80	

Price per Length

Order Code	Product Code	1+
WXF9091	662M-025-1000	£54.79
WXF9092	662M-032-1000	£57.38
WXF9093	662M-038-1000	£63.53
WXF33108	662M-045-1000	£72.71
WXF9094	662M-051-1000	£79.10
WXF33109	662M-057-1000	£89.37
WXF9095	662M-063-1000	£97.25
WXF9096	662M-076-1000	£109.41
WXF33110	662M-080-1000	£113.81
WXF33111	662M-089-1000	£127.24
WXF9097	662M-102-1000	£145.22
WXF33112	662M-115-1000	£155.25
WXF33113	662M-127-1000	£186.31
WXF33114	662M-152-1000	£258.12
WXF35408	662M-203-1000	£364.40

Master-NEO 1



- Single ply neoprene coated glass fibre ducting
- Reinforced internally with steel wire helix and an external glass cord
- Temp. range -35°C to +135°C (Intermittent to +150°C)
- Supplied in 4 metre lengths

Properties and Applications

- Lightweight, highly flexible, kink proof
- Good chemical resistance
- Suitable for hot air in granular dryers and dust and fumes at low pressure

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (kg/m)
680-051-0400	51	1.20	4300	16	0.25
680-063-0400	63	1.10	3900	22	0.32
680-076-0400	76	1.10	3400	27	0.41
680-102-0400	102	0.90	2600	35	0.65
680-127-0400	127	0.80	1700	46	0.80
680-152-0400	152	0.70	1400	51	0.99

Price per Length

Order Code	Product Code	1+
WXF9100	680-051-0400	£60.69
WXF9101	680-063-0400	£64.89
WXF9102	680-076-0400	£72.58
WXF9103	680-102-0400	£88.67
WXF33123	680-127-0400	£110.97
WXF33124	680-152-0400	£124.80

Master-NEO 2



- Double ply neoprene coated glass fabric ducting
- Reinforced with embedded steel wire helix and external glass cord
- Temp. range -35°C to +135°C (Intermittent to +150°C)
- Supplied in 4 metre lengths

Properties and Applications

- Lightweight, highly flexible, kink proof
- Good chemical resistance
- Use for hot air in granular dryers
- Suitable for dust and fumes at low pressure and where a smooth bore is required

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (kg/m)
681-051-0400	51	2.60	5200	24	0.36
681-063-0400	63	2.40	4800	31	0.49
681-076-0400	76	2.20	4300	38	0.58
681-102-0400	102	1.90	3500	52	0.77
681-127-0400	127	1.40	2500	64	1.00
681-152-0400	152	1.20	1700	75	1.20

Price per Length

Order Code	Product Code	1+
WXF9104	681-051-0400	£92.39
WXF9105	681-063-0400	£100.31
WXF9106	681-076-0400	£107.75
WXF9107	681-102-0400	£130.27
WXF33125	681-127-0400	£154.06
WXF33126	681-152-0400	£177.07

Master-SIL 1



- Single ply silicone coated glass fabric ducting
- Reinforced with an embedded steel wire helix and external glass cord
- Temp. range -70°C to +250°C (Intermittent to +300°C)
- Supplied in 4 metre lengths

Properties and Applications


- Lightweight, highly flexible, kink proof
- Good chemical resistance
- Use for hot air in granular dryers
- Suitable for dust and fumes at low pressures and where extremes of temperature are involved

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
685-051-0400	51	1.20	4300	16	0.25
685-063-0400	63	1.10	3900	22	0.32
685-076-0400	76	1.10	3400	27	0.41
685-102-0400	102	0.90	2600	35	0.65
685-127-0400	127	0.80	1700	46	0.80
685-152-0400	152	0.70	1400	51	0.99

Price per Length

Order Code	Product Code	1+
WXF9108	685-051-0400	£89.91
WXF9109	685-063-0400	£98.07
WXF9110	685-076-0400	£109.23
WXF9111	685-102-0400	£131.26
WXF33127	685-127-0400	£164.71
WXF33128	685-152-0400	£188.47

Master-SIL 2

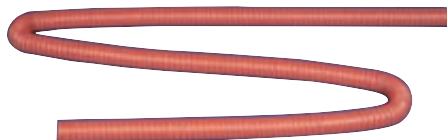

- Double ply silicone coated glass fabric ducting
- Reinforced with an embedded steel wire helix and external glass cord
- Temp. range -70°C to +250°C (Intermittent to +300°C)
- Supplied in 4 metre lengths

Properties and Applications

- Lightweight, highly flexible, kink proof
- Good chemical resistance
- Use for hot air in granular dryers
- Suitable for dust and fumes at low pressures
- Ideal where extremes of temperature are involved and where a smooth bore is required

Product Code	Size (mm)	Working Pressure (Bar)	Suction (mm WG)	Bend Radius (mm)	Weight (Kg/m)
686-051-0400	51	2.60	5200	24	0.36
686-063-0400	63	2.40	4800	31	0.49
686-076-0400	76	2.20	4300	38	0.58
686-102-0400	102	1.90	3500	52	0.77
	127	1.40	2500	64	1.00
	152	1.20	1700	75	1.20

Price per Length

Order Code	Product Code	1+
WXF9112	686-051-0400	£136.72
WXF9113	686-063-0400	£153.06
WXF9114	686-076-0400	£172.88
WXF9115	686-102-0400	£213.25
WXF33129	686-127-0400	£249.89
WXF33130	686-152-0400	£279.36

Vaculift Deluxe



- Double ply neoprene coated polyester fabric hose
- Reinforced with high tensile steel wire helix
- Supplied in lengths of 1 metre minimum to 4 metres maximum

Properties and Applications

- Compression ratio 3:1
- Ideal as a vacuum lift hose
- Can be supplied with cuffed ends

Price Per Metre

Order code	Product code	Size (mm)	1+
WXF28613	689-152-0100	152	£130.29
WXF28614	689-160-0100	160	£134.78
WXF28615	689-178-0100	178	£150.51
WXF28616	689-203-0100	203	£175.22

Industrial Hose

Air Hose - 20 Bar Long Length Rubber



- Medium duty air hose
- Black natural rubber tube
- High tensile textile reinforcement
- Suitable for use on air drills & pneumatic tools
- Standard lengths 50/100 metre
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33031	HS423C100006014A	6	14	£0.97
WXF33032	HS423C100008016A	8	16	£1.18
WXF33033	HS423C100010018A	10	18	£1.37
WXF33034	HS423C100013022A	13	22	£1.91
WXF33035	HS423C100019030A	19	30	£2.90
WXF33036	HS423C100025036A	25	36	£3.65

Air Hose - 20 Bar Mandrel Built Rubber



- Medium duty air hose
- Black natural rubber tube
- High tensile textile reinforcement
- Suitable for use on air drills & pneumatic tools
- 40 metre standard length
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33037	HS541Z013022A	13	22	£4.12
WXF33038	HS541Z019028A	19	28	£4.47
WXF33039	HS541Z025035A	25	35	£5.38
WXF33040	HS541Z032046A	32	46	£7.94
WXF33041	HS541Z038052A	38	52	£9.70
WXF33042	HS541Z051065A	51	65	£13.38

Water Delivery Hose - 10 Bar Rubber



- For medium pressure use in industrial & building applications
- Black SBR rubber tube
- High tensile textile reinforcement
- Abrasion, heat & weather resistant cover
- 40 metre standard lengths
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33038	HS541Z019028A	19	28	£4.47
WXF33039	HS541Z025035A	25	35	£5.38
WXF33040	HS541Z032046A	32	46	£7.94
WXF33041	HS541Z038052A	38	52	£9.70
WXF33042	HS541Z051065A	51	65	£13.38

Water Suction and Delivery Hose - Mandrel Built, 10 Bar Rubber



- Suitable for building, industrial and agricultural applications
- Embedded steel wire helix
- High tensile textile reinforcement
- Black SBR rubber tube
- Smooth wrapped finish
- 40 metre standard lengths
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33043	HS543Z025035A	25	35	£7.67
WXF33044	HS543Z032043A	32	43	£8.93
WXF33045	HS543Z038047A	38	47	£10.42
WXF33046	HS543Z051061A	51	61	£12.20
WXF33047	HS543Z076087A	76	87	£18.65
WXF33048	HS543Z102114A	102	114	£23.16
WXF33049	HS543Z152171A	152	171	£46.79
WXF33050	HS543Z203228A	203	228	£93.39

Radiator Hose - Mandrel Built, 4 Bar Rubber



- Suitable for hot water mixed with anti-freeze
- EPDM rubber tube
- Smooth cloth impression finish
- High resistant textile reinforcement
- Black EPDM Cover
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33051	HS544Z019027A	19	27	£5.57
WXF33052	HS544Z022031A	22	31	£7.22
WXF33053	HS544Z025033A	25	33	£8.90
WXF33054	HS544Z032040A	32	40	£13.63
WXF33055	HS544Z038046A	38	46	£13.65
WXF33056	HS544Z045053A	45	53	£16.19
WXF33057	HS544Z050059A	50	59	£14.15
WXF33058	HS544Z055065A	55	65	£17.60
WXF33059	HS544Z075084A	75	84	£21.25
WXF33060	HS544Z090098A	90	98	£27.11
WXF33061	HS544Z100112A	100	112	£38.41

Washdown Hot Water/Steam Hose - Mandrel Built Rubber, 8 Bar



- Smooth wrapped finish
- Black EPDM rubber tube
- High tensile textile reinforcement
- Temp. range -40°C to 170 °C
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33067	HS612Z013025A	13	25	£5.92
WXF33068	HS612Z019033A	19	33	£7.96
WXF33069	HS612Z025040A	25	40	£10.29

Superheated Steam Hose - Mandrel Built Rubber, 17 Bar



- Black EPDM rubber tube
- Steel wire reinforcement
- Black EPDM pin pricked rubber cover
- Temp. range -40 °C to 210 °C
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33062	HS611Z013025A	13	25	£10.88
WXF33063	HS611Z019033A	19	33	£11.53
WXF33064	HS611Z025040A	25	40	£14.68
WXF33065	HS611Z038054A	38	54	£23.50
WXF33066	HS611Z051069A	51	69	£32.03

Oil and Fuel Suction and Delivery Hose - Mandrel Built Rubber, 10 bar



- Embedded steel wire helix
- Embedded antistatic wire
- Nitrile rubber tube
- High tensile textile reinforcement
- Standard length 40 metre
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33025	HS312Z025035A	25	35	£9.24
WXF33026	HS312Z032042A	32	42	£10.88
WXF33027	HS312Z038048A	38	48	£12.75
WXF33028	HS312Z051061A	51	61	£17.77
WXF33029	HS312Z076087A	76	87	£28.33
WXF33030	HS312Z102114A	102	114	£41.14

Multi-Purpose Extruded Delivery Hose, 20 Bar



- Oil resistant nitrile rubber tube
- High tensile textile reinforcement
- Abrasion, heat & weather resistant cover
- Standard lengths 50/100 metre
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33011	HS242Z006013A	6	12	£1.24
WXF33012	HS242Z008015A	8	15	£1.45
WXF33013	HS242Z010017A	10	17	£1.66
WXF33014	HS242Z013020A	13	20	£1.97
WXF33015	HS242Z019029A	19	29	£4.18
WXF33016	HS242Z025035A	25	35	£5.19

Brewers / Potable Water Delivery Hose - Mandrel Built Rubber, 10 Bar



- White special non-tainting rubber tube
- High tensile textile reinforcement
- Suitable for potable water, wine, beer etc
- Standard length 40 metre
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33006	HS121Z025037A	25	37	£12.26
WXF33007	HS121Z038052A	38	52	£18.65
WXF33008	HS121Z051067A	51	67	£25.35
WXF33009	HS121Z076094A	76	94	£42.80
WXF33010	HS121Z102120A	102	120	£39.38

Shotblast Hose- Mandrel Built Rubber, 12 Bar



- Special anti-static rubber tube
- High tensile textile reinforcement
- Smooth wrapped finish
- Suitable for conveying highly abrasive media
- Standard length 40 metre
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33070	HS662Z025039A	25	39	£8.25
WXF33071	HS662Z032048A	32	48	£7.67
WXF33072	HS662Z032054A	32	54	£9.03

Chemical Suction and Delivery Hose - UPE Rubber Mandrel Built, 16 Bar



- Suitable for a wide range of chemicals including sea water
- Black UPE rubber tube
- Embedded steel wire helix
- Chemical resistant green EPDM cover
- Standard length 40 metre
- Assemblies with your choice of fittings can be supplied on request

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	1+
WXF33017	HS311Z019031A	19	31	£13.27
WXF33018	HS311Z025037A	25	37	£16.34
WXF33019	HS311Z032044A	32	44	£21.25
WXF33020	HS311Z038051A	38	51	£26.04
WXF33021	HS311Z051066A	51	66	£35.97
WXF33022	HS311Z063079A	63	79	£42.74
WXF33023	HS311Z076092A	76	92	£60.31
WXF33024	HS311Z102118A	102	118	£75.14

Gates Hydraulic Hose

EnviroFluid ® Spiral Hose

- 1/2" to 1.1/4" bore
- Tested with GS couplings to one million impulse cycles at 133% of max. working pressure
- Nitrile tube for biodegradable hydraulic fluids and petroleum-based fluids
- 280 - 420 bar
- High temperature resistance (-40°C to +120°C)
- Colour coding for easy selection

EFG3K



- Rated to 3,000 PSI
- Recommended for extremely high pressure and high impulse hydraulic applications

Price per Metre

Order Code	Product Code	Bore Size	1+
WXF1977	20EFG3K	1-1/4"	£29.27

EFG4K



- Rated to 4,000 PSI
- Recommended for extremely high pressure and high impulse hydraulic applications

Price per Metre

Order Code	Product Code	Bore Size	1+
WXF1990	8EFG4K	1/2"	£11.60
WXF1991	10EFG4K	5/8"	£13.51
WXF1992	12EFG4K	3/4"	£14.28
WXF1993	16EFG4K	1"	£18.65
WXF1994	20EFG4K	1-1/4"	£29.58

EFG5K



- Rated to 5,000 PSI
- Recommended for extremely high pressure and high impulse hydraulic applications

Price per Metre

Order Code	Product Code	Bore Size	1+
WXF1995	8EFG5K	1/2"	£11.89
WXF1996	10EFG5K	5/8"	£14.03
WXF1997	12EFG5K	3/4"	£15.59
WXF1998	16EFG5K	1"	£21.52
WXF1999	20EFG5K	1-1/4"	£40.72

EFG6K



- Rated to 6,000 PSI
- Recommended extremely high pressure and high impulse applications such as hydrostatic transmission

Price per Metre

Order Code	Product Code	Bore Size	1+
WXF2000	8EFG6K	1/2"	£12.88
WXF2001	10EFG6K	5/8"	£17.52
WXF2002	12EFG6K	3/4"	£18.41
WXF2003	16EFG6K	1"	£24.23
WXF2004	20EFG6K	1-1/4"	£47.46

CM2T Megaflex ®



- Recommended for high pressure hydraulic applications
- Easy to route and to install in tight areas

Price per Metre

Order Code	Product Code	Bore Size	1+
WXF2010	CM2T04	1/4"	£5.46
WXF2011	CM2T05	5/16"	£5.91
WXF2012	CM2T06	3/8"	£6.11
WXF2013	CM2T08	1/2"	£6.99
WXF2014	CM2T10	5/8"	£8.46
WXF2015	CM2T12	3/4"	£9.85
WXF2016	CM2T16	1"	£13.30

Multi Purpose Hose GP60



- Easy identification due to colour coding
- Static conductive for greater safety
- Constant working pressure throughout the range
- Suitable for the transfer of hot water, oil and hydraulic fluid
- Megacrimp® and HA couplings can be crimped on to the hose
- Hose suitable for the transfer of a wide range of low pressure fluids
- All sizes rated to 290 PSI

Price per Metre

Order Code	Product Code	Bore Size	1+
WXF2018	GP60-6	1/4"	£2.27
WXF2019	GP60-8	5/16"	£2.40
WXF2020	GP60-10	3/8"	£2.78
WXF2021	GP60-13	1/2"	£3.38
WXF2022	GP60-16	5/8"	£4.43
WXF2023	GP60-19	3/4"	£5.70
WXF2024	GP60-25	1"	£7.67

Merlett

Reinforced PVC Hose





- Food quality, lightweight flexible hose
- Resistant to weather conditions
- Suitable for compressed air, cooling liquids and certain chemical solutions
- Supplied in 30 metre coils

Price Each

Order Code	Product Code	Hose ID	Hose OD	Colour	1+
WXF8051	RPVC14-30	6mm	12mm	Clear	£12.88
WXF8052	RPVC14B-30	6mm	12mm	Blue	£12.88
WXF8053	RPVC14N-30	6mm	12mm	Black	£12.88
WXF8054	RPVC14R-30	6mm	12mm	Red	£12.88
WXF8055	RPVC14Y-30	6mm	12mm	Yellow	£12.88

Order Code	Product Code	Hose ID	Hose OD	Colour	1+
WXF8066	RPVC516-30	8mm	14mm	Clear	£18.74
WXF8067	RPVC516B-30	8mm	14mm	Blue	£18.74
WXF8068	RPVC516N-30	8mm	14mm	Black	£18.74
WXF8069	RPVC516R-30	8mm	14mm	Red	£18.74
WXF8070	RPVC516Y-30	8mm	14mm	Yellow	£18.74
WXF8061	RPVC38-30	10mm	16mm	Clear	£16.41
WXF8062	RPVC38B-30	10mm	16mm	Blue	£16.41
WXF8063	RPVC38N-30	10mm	16mm	Black	£16.41
WXF8064	RPVC38R-30	10mm	16mm	Red	£16.41
WXF8065	RPVC38Y-30	10mm	16mm	Yellow	£16.41
WXF8045	RPVC12-30	13mm	19mm	Clear	£19.88
WXF8046	RPVC12B-30	13mm	19mm	Blue	£19.88
WXF8047	RPVC12N-30	13mm	19mm	Black	£19.88
WXF8048	RPVC12R-30	13mm	19mm	Red	£19.88
WXF8049	RPVC12Y-30	13mm	19mm	Yellow	£19.88
WXF8071	RPVC58-30	16mm	22mm	Clear	£31.57
WXF8058	RPVC34-30	19mm	26mm	Clear	£35.10
WXF8059	RPVC34B-30	19mm	26mm	Blue	£35.10
WXF8060	RPVC34N-30	19mm	26mm	Black	£35.10
WXF8050	RPVC1-30	25mm	33mm	Clear	£49.12
WXF8056	RPVC1N-30	25mm	33mm	Black	£49.22
WXF8044	RPVC114-30	32mm	42mm	Clear	£70.18
WXF8043	RPVC112-30	38mm	48mm	Clear	£99.48
WXF8057	RPVC2-30	50mm	62mm	Clear	£115.84

Clear PVC Hose

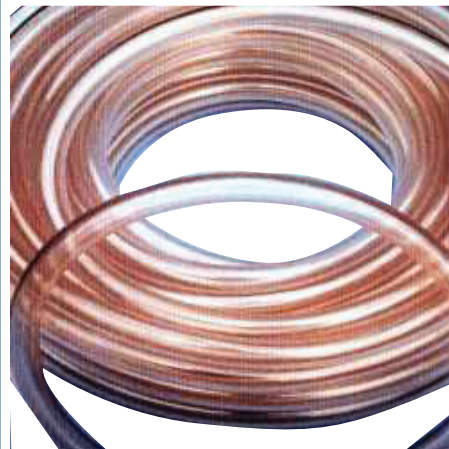

- Food quality
- Light duty crystal clear PVC hose
- Highly versatile and flexible
- Suitable for water and low pressure air
- Supplied in 30 metre coils

Price Each

Order Code	Product Code	Hose ID	Hose OD	1+
WXF7981	710062	6mm	9mm	£10.68
WXF7985	710102	9mm	12mm	£13.52
WXF7979	710132	12mm	15mm	£17.60
WXF7983	710192	19mm	22mm	£28.39
WXF7982	710064	6mm	12mm	£23.63
WXF7986	710104	10mm	16mm	£26.80
WXF7980	710134	13mm	19mm	£32.19
WXF7984	710194	19mm	25mm	£47.70

For pressure gauges, see our Instrumentation section



Wire Braid Hose

- 1/4" to 2" bore
- Tested with "Megacrimp®" fittings to 600,000 impulse cycles
- Nitrile tube for biodegradable hydraulic fluids
- High temperature resistance (-40°C to +100°C)
- Colour coding for easy selection

M3K



- Recommended for high pressure hydraulic applications
- Easy to route and to install in tight areas
- Rated to 3,000 PSI

Price per Metre

Order Code	Product Code	Bore Size	1+
WXF2006	4M3K	1/4"	£5.60
WXF2007	5M3K	5/16"	£6.26
WXF2008	6M3K	3/8"	£6.82
WXF2009	8M3K	1/2"	£7.94

Airline Hose - 18 Bar




- Special plastic compound with polyester yarn reinforcement
- Excellent resistance to low temperature and oils
- Performance, look and softness like conventional rubber
- Supplied in 100 and 60 metre coils

Price Each

Order Code	Product Code	Hose ID	Hose OD	Coil Length	1+
WXF8037	9150740640000	6mm	14mm	100m	£132.18
WXF8041	9150740870000	8mm	17mm	100m	£149.72
WXF8040	9150741090000	10mm	19mm	100m	£188.33
WXF8036	9150741330000	13mm	23mm	100m	£238.62
WXF8042	9150741660000	16mm	26mm	100m	£299.46
WXF8039	9150741900000	19mm	30mm	60m	£218.28
WXF8038	9150742570000	25mm	37mm	60m	£318.63

Ducting Hose - Polyurethane



- Crystal clear and very flexible medium duty Ducting Hose
- Excellent internal and external abrasion resistance
- Ideally suited for the transfer of large granular abrasive particles
- Supplied in 30 metre coils

Price Each

Order Code	Product Code	Hose ID	Wall Thickness	1+
WXF8137	9130550500000	50mm	0.55mm	£180.02
WXF7987	9130550630000	63mm	0.55mm	£374.24
WXF7989	9130550700000	70mm	0.6mm	£382.50
WXF8137	9130550800000	80mm	0.6mm	£180.02
WXF7990	9130550900000	90mm	0.6mm	£395.29
WXF7992	9130551000000	100mm	0.65mm	£404.31
WXF7994	9130551250000	125mm	0.65mm	£445.92
WXF7993	9130551400000	140mm	0.65mm	£457.97
WXF7995	9130551500000	150mm	0.7mm	£498.81

Ducting Hose - PVC



- Extremely flexible all PVC grey Ducting Hose
- A versatile ducting with a smooth bore and corrugated cover
- Retains its full diameter even in tight bending radii
- Supplied in 50 and 30 metre coils

Price Each

Order Code	Product Code	Hose ID	Hose OD	Coil Length	1+
WXF7997	9110100500000	50mm	58mm	50m	£285.26
WXF7996	9110100630000	63mm	71.5mm	50m	£385.52
WXF7999	9110100750000	75mm	84.4mm	50m	£415.11
WXF7998	9110100900000	90mm	100.5mm	30m	£477.51
WXF8000	9110101000000	100mm	109.4mm	30m	£380.51
WXF8001	9110101250000	125mm	136.5mm	30m	£488.18
WXF8002	9110101500000	150mm	163mm	30m	£611.51

Layflat Hose



- Layflat suction delivery hose that is easy to handle, store and transport
- Highly resistant to ageing and abrasion
- Suitable for agriculture, construction and industry in general
- Supplied in 100 metre coils

Price Each

Order Code	Product Code	Hose ID	Hose OD	1+
WXF8003	91508105100C7	51mm	54mm	£203.20
WXF8004	91508107600C7	76mm	80mm	£326.52
WXF8005	91508110200C7	102mm	106mm	£446.17

Suction Delivery Hose - Water



- Translucent green superlastic flexible PVC hose with white spiral helix embedded
- Multi-purpose hose for medium duty suction and discharge use
- Easy to handle, lightweight with transparent smooth bore
- Supplied in 30 metre coils

Price Each

Order Code	Product Code	Hose ID	Hose OD	1+
WXF8091	911022025923G	25mm	31.6mm	£77.21
WXF8090	911022032923G	32mm	39.2mm	£96.46
WXF8089	911022038923G	38mm	45.4mm	£119.05
WXF8093	911022050923G	50mm	58.2mm	£144.97
WXF8092	911022063003G	63mm	71mm	£366.24

Suction Delivery Hose - Food Quality



- Translucent yellow PVC hose with an embedded white spiral helix
- Multi-purpose food and beverage industry hose
- Lightweight, flexible, non-toxic with smooth inside bore
- Supplied in 30 metre coils


Price Each

Order Code	Product Code	Hose ID	Hose OD	1+
WXF8081	9110200209200	20mm	26.2mm	£90.95
WXF8079	9110200259200	25mm	31.6mm	£112.16
WXF8078	9110200329200	32mm	39.2mm	£140.08
WXF8077	9110200389200	38mm	45.4mm	£169.00
WXF8080	9110200509200	50mm	58.2mm	£242.55

For a complete range of Enerpac equipment, see our Hydraulics section



Suction Delivery Hose - Medium Duty

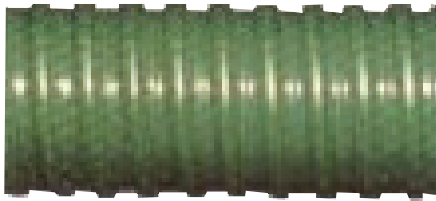


- Opaque green flexible PVC tubing with white spiral embedded helix
- Very easy to handle with excellent weather and crush resistance
- A robust general purpose hose
- Supplied in 30 metre coils

Price Each

Order Code	Product Code	Hose ID	Hose OD	1+
WXF8084	91105702592L4	25mm	31.6mm	£78.70
WXF8083	91105703292L4	32mm	39.2mm	£106.75
WXF8082	91105703892L4	38mm	45.4mm	£136.94
WXF8086	91119305192L4	51mm	61.8mm	£278.06
WXF8085	91111706392L4	63mm	75.5mm	£278.06
WXF8087	91119307692L4	76mm	88.6mm	£298.40
WXF8088	91119310292L4	102mm	116.2mm	£474.24

Suction Delivery Hose - Heavy Duty

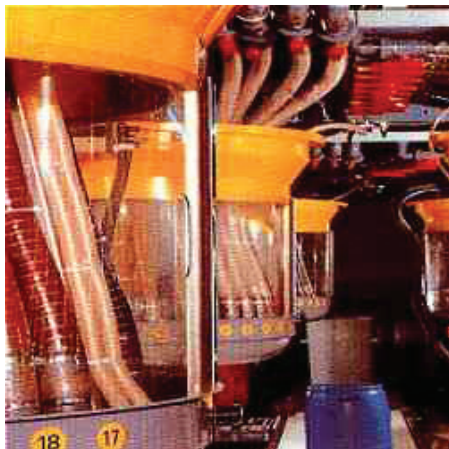

- Thick crystal clear non-toxic flexible PVC hose with high tensile steel spring helix
- High impact and chemical resistance
- Excellent vacuum ability and transparency
- Supplied in 60 and 30 metre coils
- Armovin HNA


Price Each

Order Code	Product Code	Hose ID	Hose OD	Coil Length	1+
WXF8076	9130400200000	20mm	26.8mm	60m	£241.65
WXF8074	9130400250000	25mm	33mm	60m	£339.31
WXF8073	9130400320000	32mm	40.4mm	60m	£511.09
WXF8072	9130400380000	38mm	47mm	30m	£355.92
WXF8075	9130400500000	50mm	60mm	30m	£441.02

For Asco process valves, see our Pneumatics section



Nylon Tubing

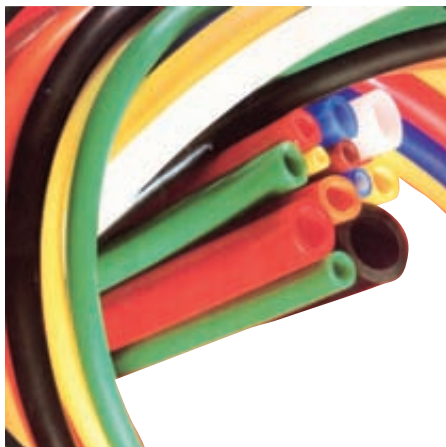

- Operating pressure: 1.5MPa
- Temperature range: -20°C to +60°C
- 100 metre coils available (Black & White only)
- Other colours available


Product Code	Operating pressure at 20°C	External Diameter	Internal Diameter	Colour
NTM04/025-30	27 bar	4mm	2.5mm	Natural
NTM04/025B-30	27 bar	4mm	2.5mm	Blue
NTM04/025G-30	27 bar	4mm	2.5mm	Green
NTM04/025N-30	27 bar	4mm	2.5mm	Black
NTM04/025R-30	27 bar	4mm	2.5mm	Red
NTM04/025Y-30	27 bar	4mm	2.5mm	Yellow
NTM06/040-30	24 bar	6mm	4mm	Natural
NTM06/040B-30	24 bar	6mm	4mm	Blue
NTM06/040G-30	24 bar	6mm	4mm	Green
NTM06/040N-30	24 bar	6mm	4mm	Black
NTM06/040R-30	24 bar	6mm	4mm	Red
NTM06/040Y-30	24 bar	6mm	4mm	Yellow
NTM08/060-30	17 bar	8mm	6mm	Natural
NTM08/060B-30	17 bar	8mm	6mm	Blue
NTM08/060G-30	17 bar	8mm	6mm	Green
NTM08/060N-30	17 bar	8mm	6mm	Black
NTM08/060R-30	17 bar	8mm	6mm	Red
NTM08/060Y-30	17 bar	8mm	6mm	Yellow
NTM10/080-30	14 bar	10mm	8mm	Natural
NTM10/080B-30	14 bar	10mm	8mm	Blue
NTM10/080G-30	14 bar	10mm	8mm	Green
NTM10/080N-30	14 bar	10mm	8mm	Black
NTM10/080R-30	14 bar	10mm	8mm	Red
NTM10/080Y-30	14 bar	10mm	8mm	Yellow
NTM12/090-30	18 bar	12mm	9mm	Natural
NTM12/090B-30	18 bar	12mm	9mm	Blue
NTM12/090N-30	18 bar	12mm	9mm	Black
NTM12/100-30	11 bar	12mm	10mm	Natural
NTM12/100B-30	11 bar	12mm	10mm	Blue
NTM12/100N-30	11 bar	12mm	10mm	Black

Price Each

Order Code	Product Code	1+
WXF8006	NTM04/025-30	£11.79
WXF8007	NTM04/025B-30	£11.79
WXF8008	NTM04/025G-30	£11.79
WXF8009	NTM04/025N-30	£11.79
WXF8010	NTM04/025R-30	£11.79
WXF8011	NTM04/025Y-30	£11.79
WXF8012	NTM06/040-30	£18.51
WXF8013	NTM06/040B-30	£18.51
WXF8014	NTM06/040G-30	£18.51
WXF8015	NTM06/040N-30	£18.51
WXF8016	NTM06/040R-30	£18.51
WXF8017	NTM06/040Y-30	£18.51
WXF8018	NTM08/060-30	£26.46
WXF8019	NTM08/060B-30	£26.46

Order Code	Product Code	1+
WXF8020	NTM08/060G-30	£26.46
WXF8021	NTM08/060N-30	£26.46
WXF8022	NTM08/060R-30	£26.46
WXF8023	NTM08/060Y-30	£26.46
WXF8024	NTM10/080-30	£34.64
WXF8025	NTM10/080B-30	£34.64
WXF8026	NTM10/080G-30	£34.64
WXF8027	NTM10/080N-30	£34.64
WXF8028	NTM10/080R-30	£34.64
WXF8029	NTM10/080Y-30	£34.64
WXF8030	NTM12/090-30	£69.79
WXF8031	NTM12/090B-30	£69.79
WXF8032	NTM12/090N-30	£69.79
WXF8033	NTM12/100-30	£49.22
WXF8034	NTM12/100B-30	£49.22
WXF8035	NTM12/100N-30	£49.22

Polyurethane Tubing

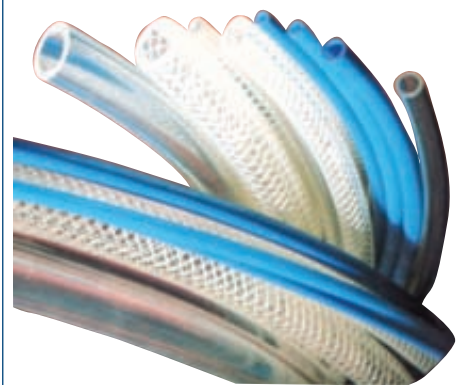

- Operating pressure : 0.8MPa
- Temperature range: -20°C to +60°C
- 100 metre coils available
- 29 colours available
- 30 metre coils as standard

Product Code	Operating Pressure at 20°C	External Diameter	Internal Diameter	Colour
PU4/25N	14 bar	4mm	2.5mm	Black
PU4/25BL	14bar	4mm	2.5mm	Blue
PU4/25G	14 bar	4mm	2.5mm	Green
PU4/25R	14 bar	4mm	2.5mm	Red
PU4/25W	14 bar	4mm	2.5mm	White
PU4/25Y	14 bar	4mm	2.5mm	Yellow
PU6/4N	12 bar	6mm	4mm	Black
PU6/4BL	12 bar	6mm	4mm	Blue
PU6/4G	12 bar	6mm	4mm	Green
PU6/4R	12 bar	6mm	4mm	Red
PU6/4W	12 bar	6mm	4mm	White
PU6/4Y	12 bar	6mm	4mm	Yellow
PU8/55N	9 bar	8mm	5.5mm	Black
PU8/55BL	9 bar	8mm	5.5mm	Blue
PU8/55G	9 bar	8mm	5.5mm	Green
PU8/55R	9 bar	8mm	5.5mm	Red
PU8/55W	9 bar	8mm	5.5mm	White
PU8/55Y	9 bar	8mm	5.5mm	Yellow
PU10/7.5N	7 bar	10mm	7.5mm	Black
PU10/7.5BL	7 bar	10mm	7.5mm	Blue
PU10/7.5G	7 bar	10mm	7.5mm	Green
PU10/7.5R	7 bar	10mm	7.5mm	Red
PU10/7.5W	7 bar	10mm	7.5mm	White
PU10/7.5Y	7 bar	10mm	7.5mm	Yellow
PU12/9N	12 bar	12mm	9mm	Black
PU12/9BL	12 bar	12mm	9mm	Blue
PU12/9G	12 bar	12mm	9mm	Green
PU12/9R	12 bar	12mm	9mm	Red
PU12/9W	12 bar	12mm	9mm	White

Order Code	Product Code	Price Each	1+
WXF7963	PU4/25N	£10.40	
WXF7961	PU4/25BL	£10.40	
WXF7962	PU4/25G	£10.40	
WXF7964	PU4/25R	£10.40	
WXF7965	PU4/25W	£10.40	
WXF7966	PU4/25Y	£10.40	
WXF7969	PU6/4N	£17.89	
WXF7967	PU6/4BL	£17.89	
WXF7968	PU6/4G	£17.89	
WXF7970	PU6/4R	£17.89	
WXF7971	PU6/4W	£17.89	
WXF7972	PU6/4Y	£17.89	
WXF7975	PU8/55N	£27.73	
WXF7973	PU8/55BL	£27.73	
WXF7974	PU8/55G	£27.73	
WXF7976	PU8/55R	£27.73	
WXF7977	PU8/55W	£27.73	
WXF7978	PU8/55Y	£27.73	
WXF7952	PU10/75N	£40.15	
WXF7950	PU10/75BL	£40.15	
WXF7951	PU10/75G	£40.15	
WXF7953	PU10/75R	£40.15	
WXF7954	PU10/75W	£40.15	
WXF7955	PU10/75Y	£40.15	
WXF7958	PU12/9N	£61.13	
WXF7956	PU12/9BL	£61.13	
WXF7957	PU12/9G	£61.13	
WXF7959	PU12/9R	£61.13	
WXF7960	PU12/9W	£61.13	

PTFE Lined

Smooth Bore



- Hoses made to order to suit customer requirements
- Suitable for transfer of high purity products, chemicals, cosmetic and dairy products
- Quick delivery
- High quality hygienic hose with fittings of your choice
- Resistant to majority of chemicals
- Price on application

Convolved



- Good flexibility and kink resistance
- FDA approved resin that guarantees food, cosmetic and pharmaceutical applications
- Price on application

Easy Crimp



- Low co-efficient of friction ensuring low pressure drop
- FDA approved resin guarantees food, cosmetic and pharmaceutical applications
- Price on application

Oetiker Spiral Hose

Series C DN8



- Spiral hose with CN8 Series coupling and adaptor
- Supplied in multiples of 5

Order Code	Product Code	Size	Price Each	5+
WXF28693	60600050	8.0 x 12.0 mm x 4 m	£57.81	
WXF28694	60600051	8.0 x 12.0 mm x 6 m	£65.67	
WXF28695	60600052	8.0 x 12.0 mm x 8 m	£73.29	

Series P DN6



- Spiral hose with DN6 Series P coupling and adaptor
- Supplied in multiples of 5

Order Code	Product Code	Size	Price Each	5+
WXF28696	60600044	8.0 x 12.0 mm x 4 m	£56.83	
WXF28697	60600045	8.0 x 12.0 mm x 6 m	£64.69	
WXF28698	60600046	8.0 x 12.0 mm x 8 m	£72.30	

**For Durapipe,
pipework see
our Process
section**



Layflat

Dura Light LD



- Lightweight and flexible for fast layout
- Heat, oil and abrasion resistant
- 100% nitrile rubber tube with synthetic circular woven reinforcement
- Price on application

Tuff Light IND 5



- Ozone resistant
- NSF approved material for potable water
- Lightweight construction
- Price on application

Tuff Light 117



- Durable and abrasion resistant
- Kink resistant
- High tensile strength
- Price on application

Tuff Light 422



- Superior abrasion, ozone and weathering resistance
- NSF approved material for potable water
- Lightweight and flexible for fast layout
- Also available with anti-static construction
- Price on application

16

Hose, Tubes & Ducting

Pharmaceutical

Tygon® 2275 High Purity Tubing



TYGON®

- Meets USP Class VI and FDA criteria
- Plasticizer free
- Highly resistant to aggressive cleaners and sanitizers
- Virtually no extractables
- Supplied in 15m coils

Price per Metre

Order Code	Product Code	ID	OD	15+
WXF28617	SG-T2702-23	1/16"	3/16"	£5.08
WXF28618	SG-T2704-23	1/8"	1/4"	£7.99
WXF28619	SG-T2706-23	3/16"	5/16"	£8.60
WXF28620	SG-T2708-23	1/4"	3/8"	£9.27
WXF28621	SG-T2710-23	5/16"	7/16"	£11.65
WXF28622	SG-T2712-23	3/8"	1/2"	£11.65
WXF28623	SG-T2716-43	1/2"	5/8"	£26.00

Tygon® 3350 Platinum Cured Silicone Tube



TYGON®

- Ultra-pure biopharmaceutical grade tubing
- Imparts no odours or taste to fluids transported within it
- Withstands repeated autoclaving and sterilisation methods
- Resists the adherence of blood products and other sanitary fluids
- Meets USP Class VI, FDA and NSF criteria
- Fully tested to ISO 10993 standards to facilitate validation process
- Metric sizes also available
- Supplied in 15m coils

Price per Metre

Order Code	Product Code	ID	OD	15+
WXF28624	SG-T3301-13	1/32"	3/32"	£3.75
WXF28625	SG-T3302-13	1/16"	1/8"	£4.36
WXF28626	SG-T3304-13	1/8"	3/16"	£4.94
WXF28627	SG-T3306-13	3/16"	1/4"	£6.24
WXF28628	SG-T3308-13	1/4"	5/16"	£6.90
WXF28629	SG-T3312-23	3/8"	1/2"	£13.88
WXF28630	SG-T3316-23	1/2"	5/8"	£18.96

Tygon® 3370 I.B. Platinum Cured Silicone Tubing



- Inner braiding for higher working pressures
- Withstands repeated C.I.P and S.I.P sterilisation
- Imparts no taste or odours to fluids transported within it
- Platinum cured to minimise extractables
- Smooth inner surface limits particle entrapment
- Assemblies available to order
- Meets USP Class VI, FDA, NSF and ISO 10993 criteria
- Supplied in 15m coils

Price per Metre

Order Code	Product Code	ID	OD	15+
WXF28631	SG-T1306-43	3/16"	0.44"	£49.85
WXF28632	SG-T1308-43	1/4"	0.52"	£51.57
WXF28633	SG-T1312-43	3/8"	0.69"	£63.57
WXF28634	SG-T1316-63	1/2"	0.85"	£80.51
WXF28635	SG-T1324-63	3/4"	1.15"	£119.99
WXF28636	SG-T1332-63	1"	1.39"	£151.02
WXF28637	SG-T1348-66	1-1/2"	1.9"	£307.91
WXF28638	SG-T1364-86	2"	2.43"	£312.13

Pharmed® BPT Pump Tubing



- Outlasts silicone tubing in peristaltic pumps by up to 30 times
- Withstands repeated autoclaving
- Meets USP Class VI and FDA criteria
- Heat weldable for sterile access in closed systems
- Low particulate spallation
- Specifically designed for use on peristaltic pumps
- Supplied in 7.5m coils

Price per Metre

Order Code	Product Code	ID (mm)	OD (mm)	7.5+
WXF28639	SG-R650E-26BPT	0.50	3.7	£8.10
WXF28640	SG-R6501-26BPT	0.80	4.0	£9.58
WXF28641	SG-R6502-16BPT	1.60	3.20	£10.18
WXF28642	SG-R6503-26BPT	2.40	5.60	£14.67
WXF28643	SG-R6504-16BPT	3.20	4.80	£11.20
WXF28644	SG-R6506-26BPT	4.80	8.00	£12.59
WXF28645	SG-R6508-26BPT	6.40	9.50	£14.87
WXF28646	SG-R6510-26BPT	8.00	11.10	£15.61
WXF28647	SG-R6512-26BPT	9.50	12.70	£26.02
WXF28648	SG-R6516-46BPT	12.70	19.10	£30.35

Tygon® R-3603 Lab. & Vacuum Tubing



TYGON®

- Outstanding chemical resistance
- Lot to lot consistency for reproducible results
- Smooth polished inner wall
- Non-ageing and non-oxidising
- Meets FDA CFR part 175.300 criteria
- Supplied in 15m rolls

Price per Metre

Order Code	Product Code	ID	OD	15+
WXF28649	SG-T3601-13	1/32"	3/32"	£0.96
WXF28650	SG-T3602-13	1/16"	1/8"	£1.03
WXF28651	SG-T3604-13	1/8"	3/16"	£1.54
WXF28652	SG-T3606-13	3/162	1/4"	£2.09
WXF28653	SG-T3608-13	1/4"	5/16"	£2.63
WXF28654	SG-T3612-23	3/8"	1/2"	£7.25

Pure-Fit® S.I.B. Smooth Inner Bore Fittings



Pure Fit®

- Provides a seamless transition of tubing and fittings
- Patented 360° compression seal
- Compatible with all flexible tubing
- Eliminates entrapment and leak points that occur with traditional fittings
- Fully autoclavable and sterilizable
- Animal free polypropylene construction
- Meets USP Class criteria.
- Supplied in multiples of 25 except retainers
- Retainers supplied in multiples of 250

Price Each

Order Code	Product Code	ID	Fitting Size	25+
WXF28655	PFY250PPAF	1/4"	1/4" Wye	£3.70
WXF28656	PFT250PPAF	1/4"	1/4" Tee	£3.70
WXF28657	PFY250PPAF	1/4"	1/4" Cross	£3.90
WXF28658	PFE250PPAF	1/4"	1/4" Elbow	£3.52
WXF28659	PFL250PPAF	1/4"	1/4" Tri Clamp	£4.60
WXF28660	PFL35250PPAF	1/4"	1/4" Retainer ★	£1.82
WXF28661	PFY375PPAF	3/8"	3/8" Wye	£3.90
WXF28662	PFT375PPAF	3/8"	3/8" Tee	£3.90
WXF28663	PFY375PPAF	3/8"	3/8" Cross	£4.11
WXF28664	PFE375PPAF	3/8"	3/8" Elbow	£3.70
WXF28665	PFL375PPAF	3/8"	3/8" Tri Clamp	£1.82
WXF28666	PFL35375PPAF	3/8"	3/8" Retainer ★	£1.82
WXF28667	PFY500PPAF	1/2"	1/2" Wye	£4.11
WXF28668	PFT500PPAF	1/2"	1/2" Tee	£4.11
WXF28669	PFY500PPAF	1/2"	1/2" Cross	£4.32
WXF28670	PFE500PPAF	1/2"	1/2" Elbow	£3.90
WXF28671	PFL500PPAF	1/2"	1/2" Tri Clamp	£5.09
WXF28672	PFL35500PPAF	1/2"	1/2" Retainer ★	£1.82

Barblock® Hose Retaining System




- Replaces leak prone cable ties and traditional clamps
- Compatible with all flexible tubing materials
- Constructed with USP Class VI materials
- Quick and easy to assemble
- Dynamic retention and seal
- Eliminates solvent bonding, UV bonding and toxic adhesives.
- Supplied in multiples of 250

Price Each

Order Code	Product Code	Tube ID	Tube OD	Barb Size	250+
WXF28673	BL135125	1/8"	1/4"	1/8"	£0.70
WXF28674	BL135187	3/16"	5/16"	3/16"	£0.71
WXF28675	BL135250	1/4"	3/8"	1/4"	£0.64
WXF28676	BL135252	1/4"	1/2"	1/4"	£0.70
WXF28677	BL135375	3/8"	5/8"	3/8"	£0.64
WXF28678	BL135500	1/2"	3/4"	1/2"	£0.70

Pure-Fit® TC Tube Clamp System

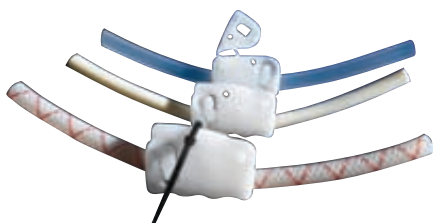

Pure-Fit®

- Provides complete fluid stoppage
- Fully autoclavable and sterilisable
- Can be retro fitted over tubing assemblies
- Simple single handed operation
- Built-in ratchet mechanism meters flow
- Self locking with a bore hole to facilitate further security
- Available in Polypropylene and PVDF
- Supplied in multiples of 25

Price Each

Order Code	Product Code	Min. Wall	Tube OD Range	25+
WXF28679	PFTC375PP	0.03"	1/8" - 3/8"	£2.17
WXF28680	PFTC375PVDF	0.03"	1/8" - 3/8"	£3.87
WXF28681	PFTC750PP	0.06"	3/8" - 3/4"	£2.67
WXF28682	PFTC750PVDF	0.06"	3/8" - 3/4"	£6.78

For Hattersley valves, see our Process section



Pure-Fit® Tru Valve System



Pure-Fit®

- Simple to operate and install
- Offers total flow control
- Accommodates fitting over assembled tubing
- Allows tamper proof lock out facility
- Suitable for autoclave and gamma irradiation
- Suitable for all flexible tubing materials
- Supplied in multiples of 5

Price Each

Order Code	Product Code	Tubing OD Range	5+
WXF28683	TV-C-75	1/82 - 5/8"	£18.46

Pure-Fit® SC Sterile Connector

- Makes sterile connection possible outside clean room
- Uses Pure-Fit® SIB technology on barbs
- All components made of animal free materials
- Suitable for gamma irradiation and autoclaving
- Visual indicator confirms correct connection
- Triple redundant locking mechanism simplifies validation

Outer Housing



Pure-Fit®

- Supplied in multiples of 25

Price Each

Order Code	Product Code	Tube I.D.	25+
WXF28684	PFSC250-OH	1/4"	£23.08
WXF28685	PFSC375-OH	3/8"	£24.31
WXF28686	PFSC500-OH	1/2"	£25.59

Inner Housing



Pure-Fit®

- Supplied in multiples of 25

Price Each

Order Code	Product Code	Tube I.D.	25+
WXF28687	PFSC250-IH	1/4"	£34.64
WXF28688	PFSC375-IH	3/8"	£34.45
WXF28689	PFSC500-IH	1/2"	£38.39

Complete Kit



Pure-Fit®

- Supplied in multiples of 25

Price Each

Order Code	Product Code	Tube I.D.	25+
WXF28690	PFSC250-CA	1/4"	£57.72
WXF28691	PFSC375-CA	3/8"	£60.75
WXF28692	PFSC500-CA	1/2"	£63.97

Clamps & Clips

Oetiker O Clips

Introduction

For more than 60 years, Oetiker has been developing, producing and distributing Oetiker clamps and rings to fasten hoses, pipes and other objects – supplemented by a wide range of compressed air couplings and formed and stamped parts.

The name Oetiker is a guarantee for quality, safety and reliability and is directly related to a variety of connecting technology patents.

Hose Clamp Kits - 2 Ear Mild Steel



- Standard range of 2 Ear clamp sizes
- Material - Mild Steel

Qty	Size	Part Number
20	5 - 7mm	10100004
20	7 - 9mm	10100008
20	8 - 11mm	10100011
20	11 - 13mm	10100016
20	13 - 15mm	10100019
20	15 - 17mm	10100022
20	15 - 18mm	10100024
20	16 - 19mm	10100056
20	17 - 20mm	10100027
20	19 - 20mm	10100029
20	20 - 23mm	10100030
20	22 - 25mm	10100032
10	23 - 27mm	10100034
10	25 - 28mm	10100035
10	27 - 31mm	10100037
1	Normal Closing Pincer	14100082

Price Each

Order Code	Product Code	Description	1+
WXF28803	18500177	2 Ear Mild Steel Clamp Kit	£76.15

Hose Clamp Kits - 2 Ear Stainless Steel



- Standard range of 2 Ear clamp sizes
- Material - Stainless Steel

Qty	Size	Product Code
20	5 - 7mm	15100003
20	7 - 9mm	15100004
20	8 - 11mm	15100023
20	9 - 11mm	15100005
20	11 - 13mm	15100006
20	13 - 15mm	15100007
20	15 - 17mm	15100008
20	15 - 18mm	15100009
20	17 - 20mm	15100010
20	19 - 22mm	15100011
20	20 - 23mm	15100012
20	22 - 25mm	15100013
10	23 - 27mm	15100014
10	25 - 28mm	15100015
10	27 - 31mm	15100016
1	Normal Closing Pincer	14100082

Price Each

Order Code	Product Code	Description	1+
WXF28804	18500179	2 Ear Stainless Steel Clamp Kit	£86.82

Hose Clamp Kits - Stepless® 1 Ear Stainless Steel



- Standard range of 1 Ear Stepless® clamp sizes
- Material - Stainless Steel

Qty	Size	Product Code
20	5.8 - 7.0mm	16700001
20	7.0 - 8.7mm	16700003
20	7.8 - 9.5mm	16700004
20	8.8 - 10.5mm	16700006
20	9.6 - 11.3mm	16700007
20	10.3 - 12.3mm	16702493
20	11.5 - 14.0mm	16700012
20	12.3 - 14.8mm	16700014
20	13.2 - 15.7mm	16700016
20	14.5 - 17.0mm	16700017
20	15.3 - 18.5mm	16700020
20	16.6 - 19.8mm	16702498
20	19.4 - 22.6mm	16700026
10	22.4 - 25.6mm	16702148
10	25.4 - 28.6mm	16704055
10	28.4 - 31.6mm	16700040
10	31.4 - 34.6mm	16700044
10	34.4 - 37.6mm	16700048
1	Normal Closing Pincer	14100082

Price Each

Order Code	Product Code	Description	1+
WXF28805	18500178	1 Ear SS Stepless® Clamp Kit	£89.80

Jubilee® Hose Clips



- Stainless steel range is all 304 (A2) material
- Worm drive hose clip
- Approved to BS5315
- Mild steel range zinc plated for corrosion resistance

Product Code	Minimum O/D	Maximum O/D
000	9.5	12
M00	11	16
00	13	20
0	16	22
0X	18	25
1A	22	30
1	25	35
1X	30	40
1M	32	45
2A	35	50
2	40	55
2X	45	60
3	55	70
3X	60	80
4	70	90
4X	85	100
5	90	120
6	110	140
6X	120	150
7	135	165
7-1/2	158	190
8-1/2	184	216
9-1/2	210	242
10-1/2	235	267
11-1/2	260	292
12-1/2	286	318

Mild Steel

Order Code	Product Code	1+	5+
WX37475	000-MS	£0.51	£0.40
WX37476	M00-MS	£0.51	£0.40
WX37477	00-MS	£0.51	£0.40
WX37478	0-MS	£0.58	£0.44
WX37479	0X-MS	£0.59	£0.45
WX37480	1A-MS	£0.63	£0.50
WX37481	1-MS	£0.65	£0.52
WX37482	1X-MS	£0.67	£0.54
WX37483	1M-MS	£0.70	£0.55
WX37484	2A-MS	£0.71	£0.56
WX37485	2-MS	£0.73	£0.59
WX37486	2X-MS	£0.78	£0.62
WX37487	3-MS	£0.86	£0.67
WX37488	3X-MS	£0.90	£0.70
WX37489	4-MS	£0.93	£0.75
WX37490	4X-MS	£1.04	£0.83
WX37491	5-MS	£1.19	£0.94
WX37492	6-MS	£1.34	£1.06
WX37493	6X-MS	£1.38	£1.08
WX37494	7-MS	£1.45	£1.14
WX37495	7-1/2-MS	£1.80	£1.43
WX37496	8-1/2-MS	£2.00	£1.57
WX37497	9-1/2-MS	£2.16	£1.71
WX37498	10-1/2-MS	£2.32	£1.84
WX37499	11-1/2-MS	£2.51	£1.98
WX37500	12-1/2-MS	£2.68	£2.12

Stainless Steel

Order Code	Product Code	1+	5+
WX37501	000-SS	£1.22	£0.96
WX37502	M00-SS	£1.22	£0.96
WX37503	00-SS	£1.22	£0.96
WX37504	0-SS	£1.45	£1.14
WX37505	0X-SS	£1.47	£1.17
WX37506	1A-SS	£1.58	£1.25
WX37507	1-SS	£1.62	£1.28
WX37508	1X-SS	£1.66	£1.31
WX37509	1M-MS	£1.78	£1.40
WX37510	2A-SS	£1.87	£1.47
WX37511	2-SS	£1.93	£1.54
WX37512	2X-SS	£2.05	£1.61
WX37513	3-SS	£2.19	£1.74
WX37514	3X-SS	£2.35	£1.85
WX37515	4-SS	£2.43	£1.93
WX37516	4X-SS	£2.53	£1.99
WX37517	5-SS	£2.84	£2.23
WX37518	6-SS	£3.11	£2.45
WX37519	6X-SS	£3.18	£2.50
WX37520	7-SS	£3.42	£2.72
WX37521	7-1/2-SS	£3.86	£3.04
WX37522	8-1/2-SS	£4.44	£3.50
WX37523	9-1/2-SS	£5.05	£3.99
WX37524	10-1/2-SS	£5.48	£4.32
WX37525	11-1/2-SS	£5.67	£4.47
WX37526	12-1/2-SS	£6.06	£4.79

Jubilee® Workshop Pack



- Assorted Jubilee® clips
- Reusable plastic case

Contents	Quantity
Size	
000	24
M00	32
00	18
0	13
0X	14
1A	12
1	13
1X	7

Price Each

Order Code	Product Code	1+	5+
WX37527	HCP143MS	£82.76	£68.71
WX37635	HCP143SS	£183.55	£152.37

Jubilee® Superclamps



- Heavy duty superclamps for use on delivery hoses
- Mild steel zinc plated or yellow passivated
- Stainless steel 316 (A4) by special order

Product Code	Minimum O/D	Maximum O/D
JSC19	17	19
JSC22	20	22
JSC25	23	25
JSC28	26	28
JSC31	29	31
JSC35	32	35
JSC39	36	39
JSC43	40	43
JSC47	44	47
JSC51	48	51
JSC55	52	55
JSC59	56	59
JSC63	60	63
JSC67	64	67
JSC73	68	73
JSC79	74	79
JSC85	80	85
JSC91	86	91
JSC97	92	97
JSC103	98	103
JSC112	104	112
JSC121	113	121
JSC130	122	130
JSC139	131	139
JSC148	140	148
JSC161	149	161
JSC174	162	174
JSC187	175	187
JSC200	188	200
JSC213	201	213
JSC226	214	226
JSC239	227	239

Price Each

Order Code	Product Code	1+	5+
WX37528	JSC19	£1.14	£0.90
WX37529	JSC22	£1.14	£0.90
WX37530	JSC25	£1.18	£0.92
WX37531	JSC28	£1.24	£0.97
WX37532	JSC31	£1.28	£1.01
WX37533	JSC35	£1.60	£1.27
WX37534	JSC39	£1.67	£1.32
WX37535	JSC43	£1.74	£1.35
WX37536	JSC47	£1.77	£1.40
WX37537	JSC51	£1.78	£1.40
WX37538	JSC55	£1.84	£1.45
WX37539	JSC59	£1.91	£1.52
WX37540	JSC63	£1.97	£1.55
WX37541	JSC67	£2.41	£1.90
WX37542	JSC73	£2.42	£1.91
WX37543	JSC79	£2.72	£2.15
WX37544	JSC85	£2.76	£2.18
WX37545	JSC91	£2.85	£2.24

Order Code	Product Code	1+	5+
WX37546	JSC97	£2.89	£2.27
WX37547	JSC103	£2.94	£2.31
WX37548	JSC112	£3.00	£2.37
WX37549	JSC121	£3.06	£2.43
WX37550	JSC130	£3.17	£2.50
WX37551	JSC139	£3.25	£2.56
WX37552	JSC148	£3.29	£2.59
WX37553	JSC161	£3.43	£2.72
WX37554	JSC174	£3.65	£2.87
WX37555	JSC187	£3.69	£2.90
WX37556	JSC200	£3.83	£3.03
WX37557	JSC213	£4.20	£3.31
WX37558	JSC226	£4.57	£3.62
WX37559	JSC239	£5.04	£3.97

Jubilee® High Torque Hose Clips



- High torque clips for additional tightening
- Twice the tightening torque of standard range
- Recommended torque 17 Nm
- All stainless steel construction


Product Code	Minimum O/D	Maximum O/D
JHT35	20	35
JHT40	25	40
JHT45	25	45
JHT50	30	50
JHT70	40	70
JHT80	60	80
JHT95	70	95
JHT100	80	100
JHT120	90	120
JHT140	110	140
JHT160	130	160
JHT180	150	180
JHT200	170	200
JHT220	190	220
JHT240	210	240
JHT260	230	260
JHT280	250	280
JHT300	270	300
JHT320	290	320
JHT340	310	340
JHT360	330	360
JHT380	350	380
JHT400	370	400
JHT420	390	420
JHT440	410	440
JHT480	450	480
JHT500	470	500

Price Each

Order Code	Product Code	1+	5+
WX37560	JHT35	£3.63	£2.86
WX37561	JHT40	£3.66	£2.88
WX37562	JHT45	£3.69	£2.92
WX37563	JHT50	£3.74	£2.95
WX37564	JHT70	£4.08	£3.22

Order Code	Product Code	1+	5+
WX37565	JHT80	£4.21	£3.32
WX37566	JHT95	£4.32	£3.42
WX37567	JHT100	£4.55	£3.58

Jubilee® Multiband

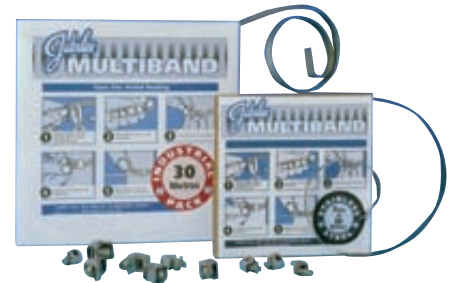

- Mild steel zinc plated in 11mm width
- Cut to size and construct your own fastener
- Choose from standard, captive screw or flip lock on 7mm stainless steel only
- Also available in 11mm stainless steel and 7mm stainless steel

Price Each

Order Code	Product Code	1+	5+
WX37587	2025-3720	£21.97	£18.01

Jubilee® Drivers



- For efficient, rapid and easy adjustment of Jubilee clips
- Flexdriver designed to reach all those awkward places

Price Each

Order Code	Product Code	1+	5+
WXF9214	2025-3753	£7.32	£7.10
WXF9215	2025-3761	£7.32	£7.10
WXF9216	2025-3779	£12.62	£12.23

Need advice?
FREE technical support at every Brammer branch

Clamps

Single Bolt

Introduction

- Heavy duty single body clamp
- Excellent torque capability
- Available in SS with mild steel bolt and 304SS assembly
- Large range of sizes

Plated Steel



Price Each

Order Code	Product Code	Size	1+	16+
WXF0656	SC17-19-GOLD	17-19mm	£0.69	£0.64
WXF0660	SC20-22-GOLD	20-22mm	£0.69	£0.64
WXF0663	SC23-25-GOLD	23-25mm	£0.72	£0.66
WXF0665	SC26-28-GOLD	26-28mm	£0.72	£0.66
WXF0666	SC29-31-GOLD	29-31mm	£0.77	£0.70
WXF0667	SC32-35-GOLD	32-35mm	£0.83	£0.76
WXF0668	SC36-39-GOLD	36-39mm	£0.83	£0.76
WXF0669	SC40-43-GOLD	40-43mm	£0.85	£0.78
WXF0670	SC44-47-GOLD	44-47mm	£1.06	£0.98
WXF0671	SC48-51-GOLD	48-51mm	£1.09	£1.00
WXF0672	SC52-55-GOLD	52-55mm	£1.14	£1.06
WXF0673	SC56-59-GOLD	56-59mm	£1.17	£1.08
WXF0674	SC60-63-GOLD	60-63mm	£1.22	£1.12
WXF0675	SC64-67-GOLD	64-67mm	£1.22	£1.12
WXF0676	SC68-73-GOLD	68-73mm	£1.59	£1.46
WXF0677	SC74-79-GOLD	74-79mm	£1.62	£1.50
WXF0678	SC80-85-GOLD	80-85mm	£1.59	£1.46
WXF0679	SC86-91-GOLD	86-91mm	£1.64	£1.52
WXF0680	SC92-97-GOLD	92-97mm	£1.70	£1.56
WXF0681	SC98-103-GOLD	98-103mm	£1.75	£1.62
WXF0649	SC104-112-GOLD	104-112mm	£1.80	£1.66
WXF0650	SC113-121-GOLD	113-121mm	£1.89	£1.74
WXF0651	SC122-130-GOLD	122-130mm	£2.17	£2.00
WXF0652	SC131-139-GOLD	131-139mm	£2.89	£2.66
WXF0653	SC140-148-GOLD	140-148mm	£2.97	£2.74
WXF0654	SC149-161-GOLD	149-161mm	£3.02	£2.78
WXF0655	SC162-174-GOLD	162-174mm	£3.53	£3.26
WXF0657	SC175-187-GOLD	175-187mm	£3.55	£3.28
WXF0658	SC188-200-GOLD	188-200mm	£3.74	£3.44
WXF0659	SC201-213-GOLD	201-213mm	£3.87	£3.56
WXF0661	SC214-226-GOLD	214-226mm	£3.95	£3.64
WXF0662	SC227-239-GOLD	227-239mm	£4.13	£3.82
WXF0664	SC240-252-GOLD	240-252mm	£4.32	£3.98

Ferritic



Price Each

Order Code	Product Code	Size	1+	16+
WXF0622	SC17-19-SUF	17-19mm	£1.06	£0.98
WXF0625	SC19-21-SUF	19-21mm	£1.06	£0.98
WXF0627	SC21-23-SUF	21-23mm	£1.06	£0.98
WXF0629	SC23-25-SUF	23-25mm	£1.06	£0.98
WXF0630	SC25-27-SUF	25-27mm	£1.11	£1.02
WXF0631	SC27-29-SUF	27-29mm	£1.09	£1.00
WXF0632	SC29-31-SUF	29-31mm	£1.33	£1.22
WXF0633	SC31-34-SUF	31-34mm	£1.36	£1.24
WXF0634	SC34-37-SUF	34-37mm	£1.38	£1.28
WXF0635	SC37-40-SUF	37-40mm	£1.46	£1.34
WXF0636	SC40-43-SUF	40-43mm	£1.46	£1.34
WXF0637	SC43-47-SUF	43-47mm	£1.89	£1.74
WXF0638	SC47-51-SUF	47-51mm	£1.89	£1.74
WXF0639	SC51-55-SUF	51-55mm	£1.91	£1.76
WXF0640	SC55-59-SUF	55-59mm	£2.01	£1.86
WXF0641	SC59-63-SUF	59-63mm	£1.99	£1.84
WXF0642	SC63-68-SUF	63-68mm	£2.01	£1.86
WXF0643	SC68-73-SUF	68-73mm	£2.68	£2.46
WXF0644	SC73-79-SUF	73-79mm	£2.84	£2.62
WXF0645	SC79-85-SUF	79-85mm	£2.81	£2.60
WXF0646	SC85-91-SUF	85-91mm	£3.00	£2.76
WXF0647	SC91-97-SUF	91-97mm	£2.97	£2.74
WXF0648	SC97-104-SUF	97-104mm	£3.00	£2.76
WXF0615	SC104-112-SUF	104-112mm	£3.32	£3.06
WXF0616	SC112-121-SUF	112-121mm	£3.42	£3.16
WXF0617	SC121-130-SUF	121-130mm	£3.37	£3.10
WXF0618	SC130-140-SUF	130-140mm	£4.85	£4.48
WXF0619	SC140-150-SUF	140-150mm	£4.77	£4.40
WXF0620	SC150-162-SUF	150-162mm	£4.88	£4.50
WXF0621	SC162-174-SUF	162-174mm	£5.19	£4.80
WXF0623	SC174-187-SUF	174-187mm	£5.14	£4.74
WXF0624	SC187-200-SUF	187-200mm	£5.46	£5.04
WXF0626	SC200-213-SUF	200-213mm	£5.41	£4.98
WXF0628	SC213-226-SUF	213-226mm	£5.72	£5.28

304 Stainless Steel



Price Each

Order Code	Product Code	Size	1+	16+
WXF0552	SC17-19-SS	17-19mm	£2.44	£2.24
WXF0555	SC19-21-SS	19-21mm	£2.47	£2.28
WXF0557	SC21-23-SS	21-23mm	£2.52	£2.32
WXF0560	SC23-25-SS	23-25mm	£2.54	£2.34
WXF0562	SC25-27-SS	25-27mm	£2.68	£2.46
WXF0563	SC27-29-SS	27-29mm	£2.63	£2.42
WXF0564	SC29-31-SS	29-31mm	£3.16	£2.90
WXF0565	SC31-34-SS	31-34mm	£3.18	£2.94
WXF0566	SC34-37-SS	34-37mm	£3.26	£3.00
WXF0567	SC37-40-SS	37-40mm	£3.45	£3.18
WXF0568	SC40-43-SS	40-43mm	£3.48	£3.20
WXF0569	SC43-47-SS	43-47mm	£4.59	£4.22
WXF0570	SC47-51-SS	47-51mm	£4.61	£4.26
WXF0571	SC51-55-SS	51-55mm	£4.72	£4.36
WXF0572	SC55-59-SS	55-59mm	£4.61	£4.26
WXF0573	SC59-63-SS	59-63mm	£4.85	£4.48

Order Code	Product Code	Size	1+	16+
WXF0574	SC63-68-SS	63-68mm	£4.91	£4.52
WXF0575	SC68-73-SS	68-73mm	£6.55	£6.04
WXF0576	SC73-79-SS	73-79mm	£6.84	£6.30
WXF0577	SC79-85-SS	79-85mm	£6.97	£6.42
WXF0578	SC85-91-SS	85-91mm	£7.05	£6.50
WXF0579	SC91-97-SS	91-97mm	£7.10	£6.56
WXF0580	SC97-104-SS	97-104mm	£7.05	£6.50
WXF0545	SC104-112-SS	104-112mm	£7.35	£6.78
WXF0546	SC112-121-SS	112-121mm	£7.58	£7.00
WXF0547	SC121-130-SS	121-130mm	£7.95	£7.34
WXF0548	SC130-140-SS	130-140mm	£11.13	£10.26
WXF0549	SC140-150-SS	140-150mm	£11.34	£10.46
WXF0550	SC150-162-SS	150-162mm	£11.61	£10.70
WXF0551	SC162-174-SS	162-174mm	£11.29	£10.42
WXF0553	SC174-187-SS	174-187mm	£11.50	£10.60
WXF0554	SC187-200-SS	187-200mm	£12.17	£11.22
WXF0556	SC200-213-SS	200-213mm	£12.35	£11.40
WXF0558	SC213-226-SS	213-226mm	£12.49	£11.52
WXF0559	SC226-239-SS	226-239mm	£12.22	£11.26
WXF0561	SC239-252-SS	239-252mm	£12.38	£11.42

316 Stainless Steel



- High quality 316 stainless steel construction
- Excellent range of sizes
- Excellent chemical resistance

Price Each

Order Code	Product Code	Size	1+	16+
WXF0588	SCS17-19-PF	17-19 mm	£3.10	£2.96
WXF0592	SCS20-22-PF	20-22 mm	£3.29	£3.15
WXF0595	SCS23-25-PF	23-25 mm	£3.32	£3.18
WXF0598	SCS26-28-PF	26-28 mm	£3.43	£3.22
WXF0599	SCS29-31-PF	29-31 mm	£3.55	£3.32
WXF0600	SCS32-35-PF	32-35 mm	£4.45	£4.27
WXF0601	SCS36-39-PF	36-39 mm	£4.53	£4.33
WXF0602	SCS40-43-PF	40-43 mm	£4.63	£4.43
WXF0603	SCS44-47-PF	44-47 mm	£4.74	£4.53
WXF0604	SCS48-51-PF	48-51 mm	£4.82	£4.62
WXF0605	SCS52-55-PF	52-55 mm	£4.90	£4.69
WXF0606	SCS56-59-PF	56-59 mm	£4.95	£4.74
WXF0607	SCS60-63-PF	60-63 mm	£5.01	£4.81
WXF0608	SCS64-67-PF	64-67 mm	£9.14	£8.75
WXF0609	SCS68-73-PF	68-73 mm	£9.25	£8.87
WXF0610	SCS74-79-PF	74-79 mm	£9.41	£9.02
WXF0611	SCS80-85-PF	80-85 mm	£9.62	£9.22
WXF0612	SCS86-91-PF	86-91 mm	£9.81	£9.39
WXF0613	SCS92-97-PF	92-97 mm	£9.99	£9.56
WXF0614	SCS98-103-PF	98-103 mm	£10.20	£9.77
WXF0581	SCS104-112-PF	104-112 mm	£10.52	£10.07
WXF0582	SCS113-121-PF	113-121 mm	£10.79	£10.34
WXF0583	SCS122-130-PF	122-130 mm	£11.10	£10.63
WXF0584	SCS131-139-PF	131-139 mm	£11.42	£10.93
WXF0585	SCS140-148-PF	140-148 mm	£11.69	£11.20
WXF0586	SCS149-161-PF	149-161 mm	£13.36	£12.79
WXF0587	SCS162-174-PF	162-174 mm	£13.92	£13.33
WXF0589	SCS175-187-PF	175-187 mm	£14.29	£13.70
WXF0590	SCS188-200-PF	188-200 mm	£14.77	£14.15
WXF0591	SCS201-213-PE	201-213 mm	£15.23	£14.59

Order Code	Product Code	Size	1+	16+
WXF0593	SCS214-226-PF	214-226 mm	£15.82	£15.15
WXF0594	SCS227-239-PF	227-239 mm	£16.48	£15.79
WXF0596	SCS240-252-PF	240-252 mm	£24.52	£23.49
WXF0597	SCS253-265-PF	253-265 mm	£17.44	£16.70

Double Bolt

Plated Steel



- Suitable for large bore hose and ducting

Price Each

Order Code	Product Code	Size	1+	16+
WXF0284	DBC20-1-2-050-PS	40-50 mm	£2.47	£2.37
WXF0285	DBC20-1-2-060-PS	50-60 mm	£2.62	£2.51
WXF0286	DBC20-1-2-065-PS	55-65 mm	£2.63	£2.52
WXF0287	DBC20-1-2-075-PS	65-75 mm	£2.70	£2.59
WXF0288	DBC20-1-2-105-PS	95-105 mm	£3.51	£3.33
WXF0289	DBC20-1-2-115-PS	105-115 mm	£3.60	£3.42
WXF0290	DBC20-1-2-130-PS	120-130 mm	£3.63	£3.45
WXF0291	DBC25-1-2-080-PS	70-80 mm	£3.14	£2.98
WXF0292	DBC25-1-2-085-PS	75-85 mm	£3.21	£3.05
WXF0293	DBC25-1-2-090-PS	80-90 mm	£3.23	£3.06
WXF0294	DBC25-1-2-095-PS	85-95 mm	£3.71	£3.55
WXF0295	DBC25-1-2-105-PS	95-105 mm	£3.82	£3.65
WXF0296	DBC25-1-2-110-PS	100-110 mm	£3.85	£3.69
WXF0297	DBC25-1-2-115-PS	105-115 mm	£3.90	£3.74
WXF0298	DBC25-1-2-120-PS	110-120 mm	£3.92	£3.76
WXF0299	DBC25-1-2-125-PS	115-125 mm	£3.94	£3.77
WXF0300	DBC25-1-2-130-PS	120-130 mm	£3.98	£3.81
WXF0301	DBC25-1-2-135-PS	125-135 mm	£4.00	£3.83
WXF0302	DBC25-1-2-140-PS	130-140 mm	£4.03	£3.86
WXF0303	DBC25-1-2-145-PS	135-145 mm	£4.05	£3.87
WXF0304	DBC25-1-2-150-PS	140-150 mm	£4.06	£3.89
WXF0305	DBC25-1-2-155-PS	145-155 mm	£4.10	£3.93
WXF0306	DBC25-1-2-160-PS	150-165 mm	£4.37	£4.18
WXF0307	DBC25-1-2-165-PS	155-170 mm	£4.42	£4.24
WXF0309	DBC25-1-2-175-PS	165-180 mm	£4.51	£4.31
WXF0310	DBC25-1-2-180-PS	170-180 mm	£4.56	£4.37
WXF0308	DBC25-1-2-170-PS	160-175 mm	£4.48	£4.30
WXF0311	DBC25-1-2-2100LD	200-215 mm	£5.12	£4.91
WXF0312	DBC25-1-2-220-PS	210-225 mm	£5.59	£5.35
WXF0313	DBC25-1-2-240-PS	230-245 mm	£6.20	£5.94
WXF0314	DBC25-1-2-250-PS	240-255 mm	£6.54	£6.26
WXF0315	DBC25-1-2-260-PS	250-265 mm	£7.28	£6.97
WXF0316	DBC25-1-2-270-PS	260-275 mm	£7.74	£7.41
WXF0317	DBC25-1-2-280-PS	270-285 mm	£8.06	£7.72
WXF0318	DBC25-1-2-300-PS	290-305 mm	£9.78	£9.37
WXF0319	DBC25-1-2-310-PS	300-315 mm	£10.25	£9.81
WXF0321	DBC25-1-2-330-PS	320-335 mm	£11.11	£10.65
WXF0322	DBC25-1-2-340-PS	330-340 mm	£11.66	£11.17
WXF0320	DBC25-1-2-320-PS	310-325 mm	£10.68	£10.24
WXF0323	DBC25-1-2-350-PS	340-355 mm	£12.90	£12.35
WXF0324	DBC25-1-2-360-PS	350-365 mm	£13.02	£12.47
WXF0325	DBC25-1-2-370-PS	360-375 mm	£14.17	£13.57

Heavy Duty Air



- Suitable for high pressure air assemblies with claw couplings

Price Each

Order Code	Product Code	Size	1+	11+
WXF0272	DBC22	17 - 22mm	£1.44	£1.38
WXF0273	DBC29	22 - 29mm	£1.68	£1.61
WXF0274	DBC34	28 - 34mm	£1.68	£1.61
WXF0275	DBC40	32 - 40mm	£2.33	£2.22
WXF0276	DBC49	39 - 49mm	£3.00	£2.85
WXF0278	DBC60	48 - 60mm	£3.66	£3.49
WXF0281	DBC76	60-76 mm	£4.69	£4.46
WXF0283	DBC94	77 - 94mm	£7.16	£6.80
WXF0270	DBC115	94-115mm	£9.97	£9.46
WXF0277	DBC525	113-127mm	£15.38	£14.60
WXF0279	DBC600	140-154mm	£15.62	£14.84
WXF0280	DBC675	155-175mm	£15.62	£14.84
WXF0271	DBC145	115-145mm	£19.92	£18.93
WXF0282	DBC875	210-225mm	£34.14	£32.43

Protective Sleeving



- Ideal for protecting hoses in unforgiving environments such as steel mills, foundries etc
- Withstands intense radiant heat
- Insulates against steam loss in steam hoses
- Protects operators from hot hoses

Price Per Metre

Order Code	Product Code	Size	1+
WXF0510	PYRO PJ-5	8mm	£12.34
WXF0513	PYRO PJ-7	11mm	£13.75
WXF0511	PYRO PJ-6	10mm	£12.69
WXF0514	PYRO PJ-8	13mm	£13.75
WXF0498	PYRO PJ-10	5/8"	£16.77
WXF0499	PYRO PJ-12	3/4"	£19.02
WXF0500	PYRO PJ-14	22mm	£22.42
WXF0501	PYRO PJ-16	25mm	£24.60
WXF0502	PYRO PJ-18	29mm	£27.56
WXF0503	PYRO PJ-20	32mm	£27.46
WXF0504	PYRO PJ-22	35mm	£30.56
WXF0505	PYRO PJ-24	38mm	£44.10
WXF0506	PYRO PJ-26	41mm	£34.92
WXF0507	PYRO PJ-28	44mm	£38.94
WXF0508	PYRO PJ-32	51mm	£45.56
WXF0509	PYRO PJ-36	57mm	£60.63
WXF0496	PYRE-PRF-40	64mm	£41.34
WXF0512	PYRO PJ-64	102mm	£151.85
WXF0497	PYRE-PRF-60	95mm	£55.89