


R6MK4 Swivel nut run tee

BSPP 60° Cone ends (ISO 8434-6) / BSPP 60° Female swivel end (ISO 8434-6)

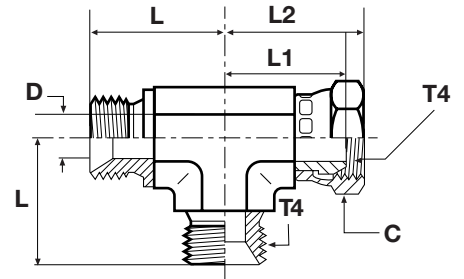

Thread BSPP T4	C mm	D mm	L mm	L1 mm	L2 mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar)
1/8	14	4	17	18	22	11	29	2R6MK4S	2R6MK4SS	350
1/4	19	5	24	25	31	14	77	4R6MK4S	4R6MK4SS	350
3/8	22	8	27	26	32	19	128	6R6MK4S	6R6MK4SS	350
1/2	27	11	32	32	39	22	203	8R6MK4S	8R6MK4SS	200
5/8	30	14	34	30	40	22	274	10R6MK4S	10R6MK4SS	200
3/4	32	17	36	33	42	27	274	12R6MK4S	12R6MK4SS	200
1	41	22	42	38	48	33	456	16R6MK4S	16R6MK4SS	120
1 1/4	50	29	48	48	58	41	801	20R6MK4S	20R6MK4SS	105

Order codes shown are part of our current manufacturing programme.
Imperial and metric parts may vary in hexagon dimensions.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Pressure ratings – PN shown, apply to Steel and Stainless Steel versions of the product.