


2 Flute – Single End – Short Length – DIN 6539

d TOLERANCES h7

mm	mm
≤ 3	+0,000/-0,010
> 3 – 6	+0,000/-0,012
> 6 – 10	+0,000/-0,015
> 10 – 18	+0,000/-0,018
> 18 – 30	+0,000/-0,021
d ₂ =h6	

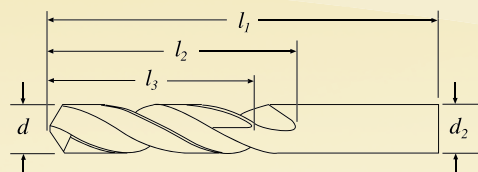

Size d mm	Overall Length l ₁ mm	Flute Length l ₂ mm	Length of Cut l ₃ mm	Uncoated EDP No.	Ti-NAMITE-A (AlTiN) EDP No.
0,5	20	3	—	62001	68643
0,55	21	3,5	—	62003	68644
0,6	21	3,5	—	62005	68645
0,65	22	4	—	62007	68646
0,7	23	4,5	—	62009	68647
0,75	23	4,5	—	62011	68648
0,8	24	5	—	62013	68649
0,85	24	5	—	62015	68650
0,9	25	5,5	—	62017	68651
0,95	25	5,5	—	62019	68652
1,0	26	6	—	62021	68653
1,05	26	6	—	62023	68654
1,1	28	7	—	62025	68655
1,15	28	7	—	62027	68656
1,2	30	8	—	62029	68657
1,25	30	8	—	62031	68658
1,3	30	8	—	62033	68659
1,35	32	9	—	62035	68660
1,4	32	9	—	62037	68661
1,45	32	9	—	62039	68662
1,5	32	9	—	62041	68663
1,6	34	10	—	62043	68664
1,7	34	10	—	62045	68665
1,8	36	11	—	62047	68666
1,9	36	11	—	62049	68667
2,0	38	12	9	62051	68668
2,1	38	12	9	62053	68669
2,2	40	13	10	62055	68670
2,3	40	13	10	62057	68671
2,4	43	14	11	62059	68672
2,5	43	14	11	62061	68673
2,6	43	14	11	62063	68674
2,7	46	16	12	62065	68675
2,8	46	16	12	62067	68676
2,9	46	16	12	62069	68677
3,0	46	16	12	62071	68678
3,1	49	18	14	62073	68679
3,2	49	18	14	62075	68680
3,3	49	18	14	62077	68681
3,4	52	20	15	62079	68682
3,5	52	20	15	62081	68683
3,6	52	20	15	62083	68684
3,7	52	20	15	62085	68685
3,8	55	22	17	62087	68686
3,9	55	22	17	62089	68687
4,0	55	22	17	62091	68688
4,1	55	22	17	62093	68689
4,2	55	22	17	62095	68690

continued on next page

Series 108M



DIN 6539 – Short Length Drills
Micrograin Solid Carbide
Short Length, 145° Four Facet Point,
27° Spiral

Serie 108M



Brocas DIN 6539 serie corta
Metal duro con micrograno
Longitud corta, punta de cuatro
caras y 145°, hélice derecha (27°)

Série 108M



Forets courts – DIN 6539
Carbure monobloc, micrograin
Court–Angle d'entrée à quatre
facettes, 145° – Hélice à droite, 27°

