


PDF technical sheet 6204.NR.EE




Single row deep groove ball bearings

Product definition	
d	20 mm
D	47 mm
B	14 mm
d1	25.90 mm
D1	41.40 mm
a min	2.31 mm
a max	2.46 mm
Ca min	3.33 mm
Ca max	3.58 mm
rs min	1 mm
rNs min	0.50 mm
D3 max	44.60 mm
b min	1.35 mm
b max	1.65 mm
r0 max	0.40 mm
D4 max	52.70 mm
f	1.07 mm
Snap ring reference	R47
Radial clearance class	CN
Mass	0.11 kg
Brand	SNR

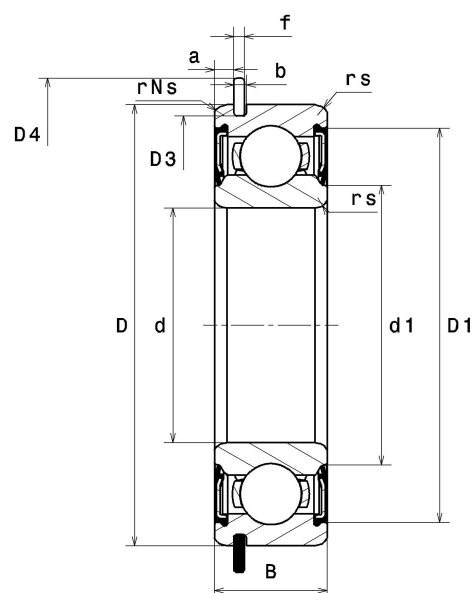

Product performance	
Dynamic load, C	12.60 kN
Static load, C0	6.60 kN
Fatigue limit load, Cu	0.30 kN
f0	13.1
Nlim	11,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	3.98 Hz
Characteristic outer ring frequency, BPF0	3.05 Hz
Characteristic inner ring frequency, BPF1	4.95 Hz

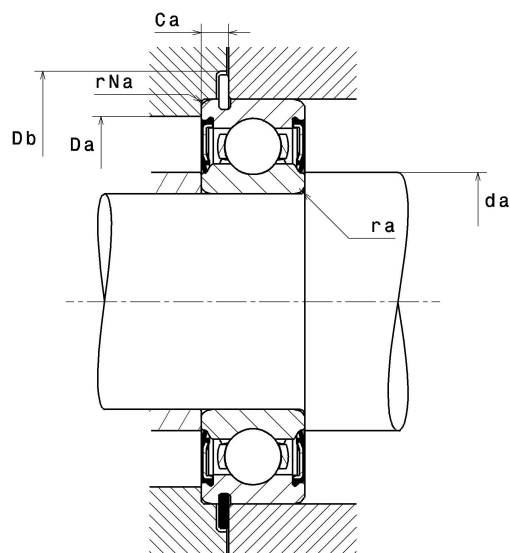

Abutment dimensions

da min	25 mm
da max	25.90 mm
Da max	42 mm
ra max	1 mm
rNa max	0.50 mm
Db min	53.50 mm

349/702/3/en/DGBB.jpg