

PDF technical sheet

10R71919CVUJ74




High precision angular contact ball bearings

High precision angular contact ball bearing, laminated resin cage centred on outer ring

Product definition	
d	95 mm
D	130 mm
B	18 mm
d1	106.20 mm
D1	118.75 mm
D2	124.24 mm
a	24 mm
Contact angle, α	15 °
rs min	0.60 mm
r1s min	0.60 mm
f0	16.67
Precision class	P4
Mass	0.59 kg
Brand	SNR



Product performance	
Dynamic load, C	40.80 kN
Static load, C0	46.30 kN
Fatigue limit load, Cu	2.33 kN
Nlim (oil)	15,500 Tr/min
Nlim (grease)	10,000 Tr/min
Axial displacement K Factor	0.93
Preload level	7
Peloid value	210 kN
axial rigidity	92 N/ μ m
radial rigidity	547 N/ μ m
Min operating temperature, Tmin	-30 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	10.82 Hz
Characteristic outer ring frequency, BPF0	12.30 Hz
Characteristic inner ring frequency, BPF1	14.70 Hz

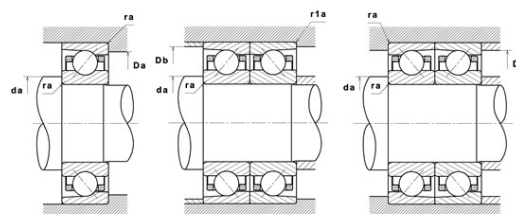

Abutment dimensions

da min	99.50 mm
db min	99.50 mm
Da max	125.50 mm
Db max	125.50 mm
r1a max	0.60 mm
ra max	0.60 mm
D6	109.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$