

PDF technical sheet 6209K




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, tapered bore, open


Product definition

d	45 mm
D	85 mm
B	19 mm
d1	54.50 mm
D1	75.60 mm
rs min	1.10 mm
Associated sleeve reference	H209
Radial clearance class	CN
Mass	0.40 kg
Brand	SNR

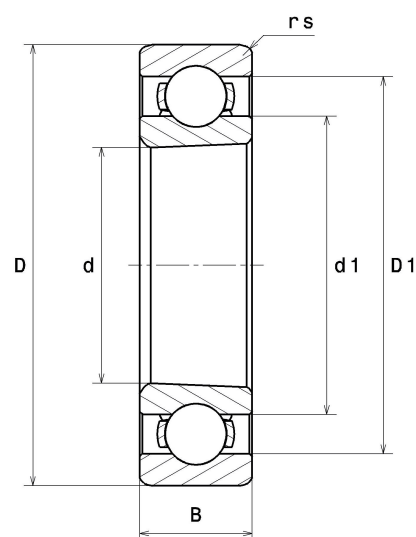

Product performance

Dynamic load, C	32.20 kN
Static load, C0	20.40 kN
Fatigue limit load, Cu	0.93 kN
f0	14.1
Nref	8,700 Tr/min
Nlim	13,000 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.40 Hz
Characteristic rolling element frequency, BSF	4.92 Hz
Characteristic outer ring frequency, BPF0	3.62 Hz
Characteristic inner ring frequency, BPFI	5.38 Hz

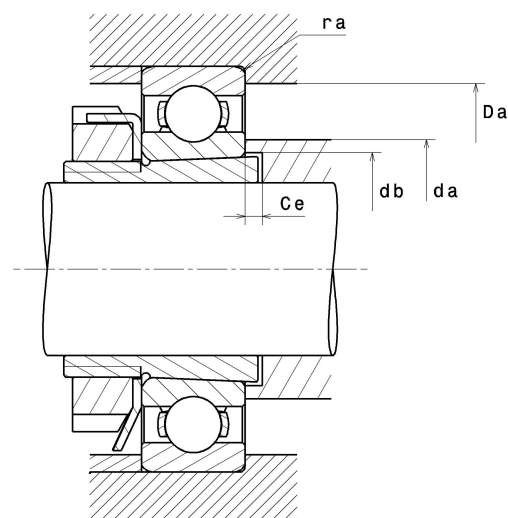

Abutment dimensions

da min	51.50 mm
da max	54.50 mm
Da max	78.50 mm
ra max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$