

PDF technical sheet 6320C4



Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, open


Product definition

d	100 mm
D	215 mm
B	47 mm
rs min	3 mm
Radial clearance class	C4
Mass	7 kg
Brand	NTN



Product performance

Dynamic load, C	173 kN
Static load, C0	141 kN
Fatigue limit load, Cu	5.10 kN
f0	13.2
Nlim (oil)	3,700 Tr/min
Nlim (grease)	3,200 Tr/min
Min operating temperature, Tmin	-60 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	4.08 Hz
Characteristic outer ring frequency, BPF0	3.07 Hz
Characteristic inner ring frequency, BPF1	4.93 Hz

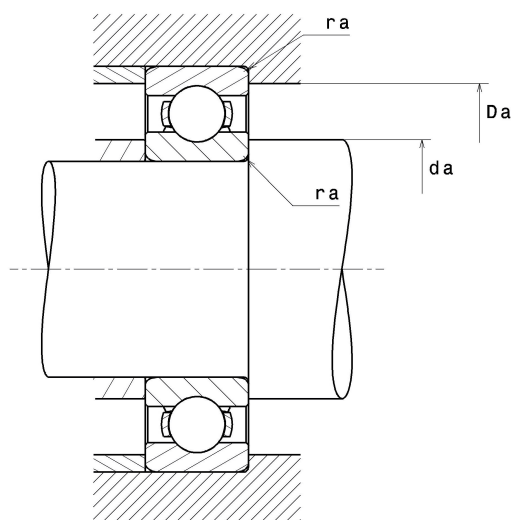

Abutment dimensions

da min	113 mm
Da max	202 mm
ra max	2.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$