


PDF technical sheet 6200LT




Single row deep groove ball bearings

TOPLINE deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides, applications upto -40 °C.

Product definition	
d	10 mm
D	30 mm
B	9 mm
d1	16 mm
D1	25.70 mm
rs min	0.60 mm
Radial clearance class	C3
Mass	0.03 kg
Brand	SNR

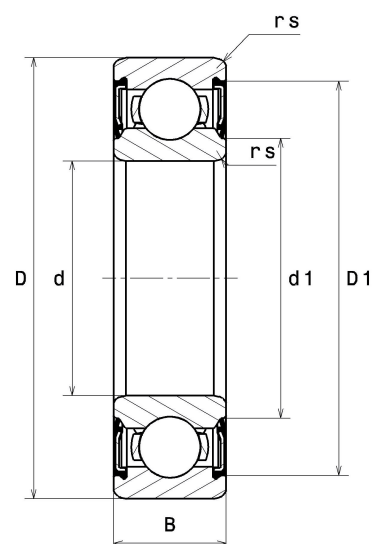

Product performance	
Dynamic load, C	5.90 kN
Static load, C0	2.60 kN
Fatigue limit load, Cu	0.12 kN
f0	12.1
Nlim	18,000 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.36 Hz
Characteristic rolling element frequency, BSF	3.32 Hz
Characteristic outer ring frequency, BPF0	2.53 Hz
Characteristic inner ring frequency, BPFI	4.47 Hz

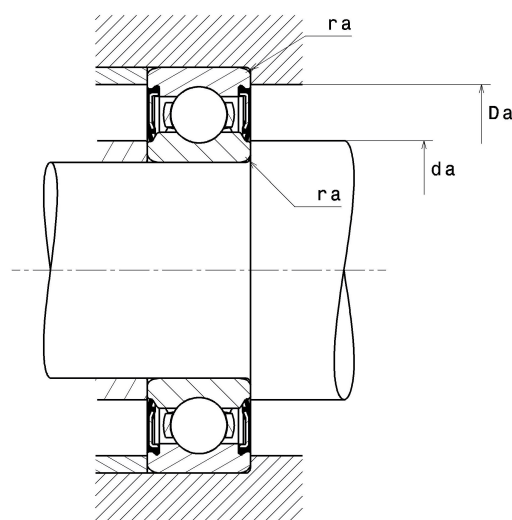

Abutment dimensions

da min	14 mm
da max	16 mm
Da max	26 mm
ra max	0.60 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / Fr \leq e$		$F_a / Fr > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < Fr$, then use $P_0 = Fr$