

PDF technical sheet 6228L1C3



Single row deep groove ball bearings

Deep groove ball bearing, radial contact, machined cage, open


Product definition

d	140 mm
D	250 mm
B	42 mm
rs min	3 mm
Radial clearance class	C3
Mass	7.57 kg
Brand	NTN



Product performance

Dynamic load, C	166 kN
Static load, C0	150 kN
Fatigue limit load, Cu	4.90 kN
f0	14.8
Nlim (oil)	2,900 Tr/min
Nlim (grease)	2,500 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.98 Hz
Characteristic outer ring frequency, BPF0	4.19 Hz
Characteristic inner ring frequency, BPF1	5.81 Hz

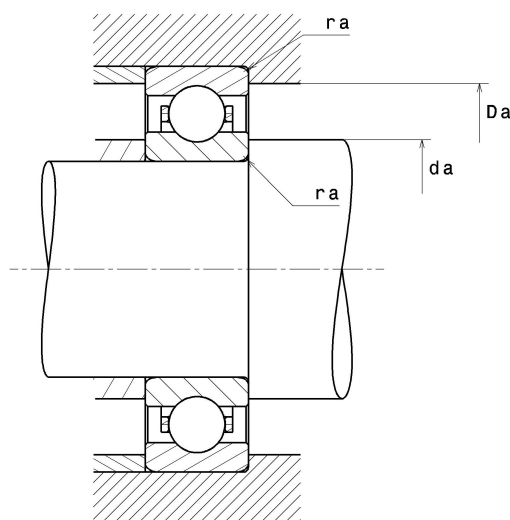

Abutment dimensions

da min	153 mm
Da max	237 mm
ra max	2.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$