


PDF technical sheet


71911HVUJ84




High precision angular contact ball bearings

High precision angular contact ball bearing, laminated resin cage centred on outer ring

Product definition	
d	55 mm
D	80 mm
B	13 mm
d1	63.10 mm
D1	71.90 mm
D2	75.19 mm
a	22 mm
Contact angle, α	25 °
rs min	1 mm
r1s min	0.30 mm
f0	16.496
Precision class	P4
Mass	0.18 kg
Brand	SNR

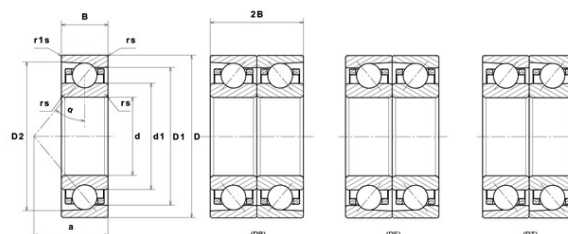

Product performance	
Dynamic load, C	17.20 kN
Static load, C0	16 kN
Fatigue limit load, Cu	0.91 kN
Nlim (oil)	24,000 Tr/min
Nlim (grease)	15,500 Tr/min
Axial displacement K Factor	0.59
Preload level	8
Peload value	440 kN
axial rigidity	192 N/ μ m
radial rigidity	387 N/ μ m
Min operating temperature, Tmin	-30 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	9.36 Hz
Characteristic outer ring frequency, BPF0	9.49 Hz
Characteristic inner ring frequency, BPFI	11.51 Hz

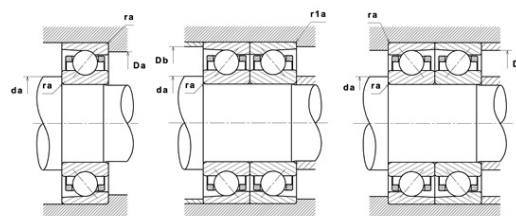

Abutment dimensions

da min	60.50 mm
db min	60.50 mm
Da max	74.50 mm
Db max	74.50 mm
r1a max	0.30 mm
ra max	1 mm
D6	65.40 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68				0.41		0.87		1.41
	30°		0.8				0.39		0.76		1.24

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $P_0 < Fr$, then use $P_0 = Fr$