


PDF technical sheet 6230C3




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, open

Product definition	
d	150 mm
D	270 mm
B	45 mm
rs min	3 mm
Radial clearance class	C3
Mass	9.41 kg
Brand	NTN

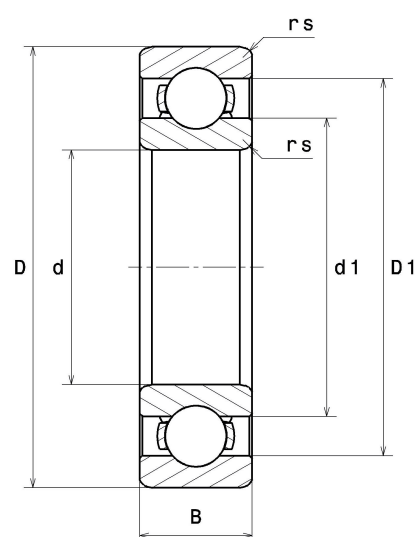

Product performance	
Dynamic load, C	176 kN
Static load, C0	168 kN
Fatigue limit load, Cu	5.30 kN
f0	15.1
Nlim (oil)	2,700 Tr/min
Nlim (grease)	2,300 Tr/min
Min operating temperature, Tmin	-60 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.46 Hz
Characteristic outer ring frequency, BPF0	4.67 Hz
Characteristic inner ring frequency, BPF1	6.33 Hz

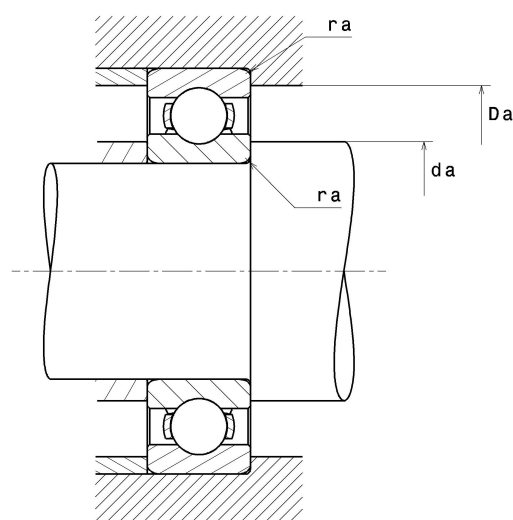

Abutment dimensions

da min	163 mm
Da max	257 mm
ra max	2.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$