

PDF technical sheet 16018C3



Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, open


Product definition

d	90 mm
D	140 mm
B	16 mm
rs min	1 mm
Radial clearance class	C3
Mass	0.85 kg
Brand	NTN



Product performance

Dynamic load, C	33.50 kN
Static load, C0	33.50 kN
Fatigue limit load, Cu	1.42 kN
f0	16.5
Nlim (oil)	5,600 Tr/min
Nlim (grease)	4,700 Tr/min
Min operating temperature, Tmin	-60 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	11.06 Hz
Characteristic outer ring frequency, BPF0	8.65 Hz
Characteristic inner ring frequency, BPF1	10.35 Hz

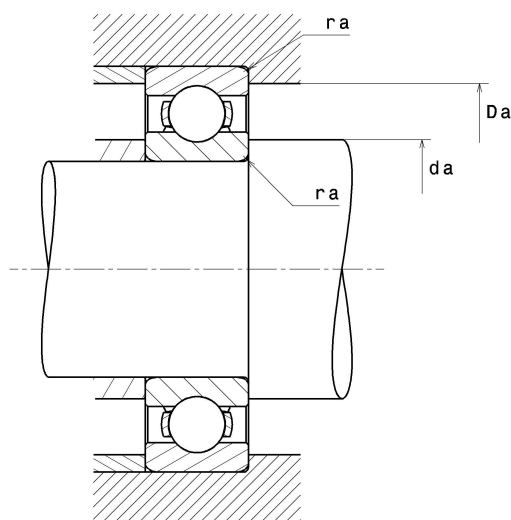

Abutment dimensions

da min	95 mm
Da max	135 mm
ra max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$