



PDF technical sheet 6310.NRZZ




Single row deep groove ball bearings

Product definition	
d	50 mm
D	110 mm
B	27 mm
d1	64.70 mm
D1	98 mm
a min	3.07 mm
a max	3.28 mm
Ca min	5.43 mm
Ca max	5.74 mm
rs min	2 mm
rNs min	0.50 mm
D3 max	106.81 mm
b min	2.70 mm
b max	3 mm
r0 max	0.60 mm
D4 max	116.60 mm
f	2.41 mm
Snap ring reference	R110
Radial clearance class	CN
Mass	1.07 kg
Brand	SNR

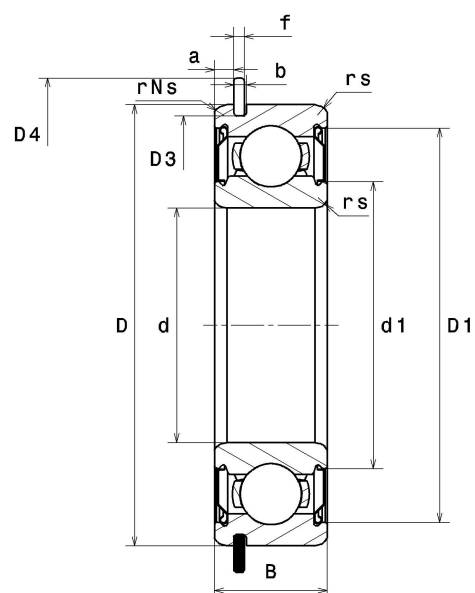

Product performance	
Dynamic load, C	61.30 kN
Static load, C0	38.30 kN
Fatigue limit load, Cu	1.74 kN
f0	13.2
Nref	7,700 Tr/min
Nlim	8,100 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	4.07 Hz
Characteristic outer ring frequency, BPF0	3.07 Hz
Characteristic inner ring frequency, BPF1	4.93 Hz

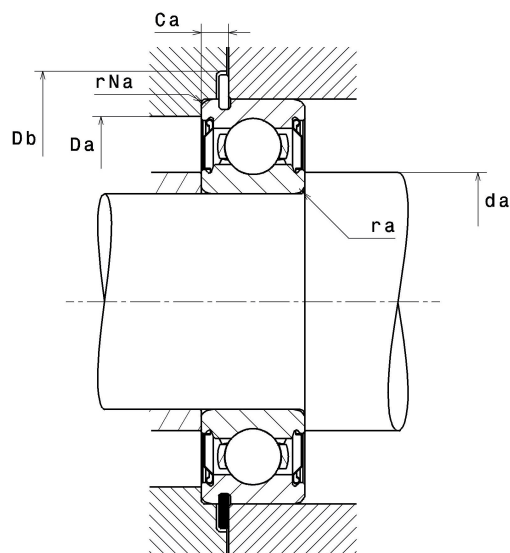

Abutment dimensions

da min	59 mm
da max	64.70 mm
Da max	101 mm
ra max	2 mm
rNa max	0.50 mm
Db min	118 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / Fr \leq e$		$F_a / Fr > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < Fr$, then use $P_0 = Fr$