

PDF technical sheet 6202EEC3




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

Product definition	
d	15 mm
D	35 mm
B	11 mm
d1	19.70 mm
D1	30.90 mm
rs min	0.60 mm
Radial clearance class	C3
Mass	0.05 kg
Brand	SNR



Product performance	
Dynamic load, C	7.60 kN
Static load, C0	3.60 kN
Fatigue limit load, Cu	0.22 kN
f0	12.7
Nlim	15,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.37 Hz
Characteristic rolling element frequency, BSF	3.68 Hz
Characteristic outer ring frequency, BPF0	2.61 Hz
Characteristic inner ring frequency, BPF1	4.39 Hz

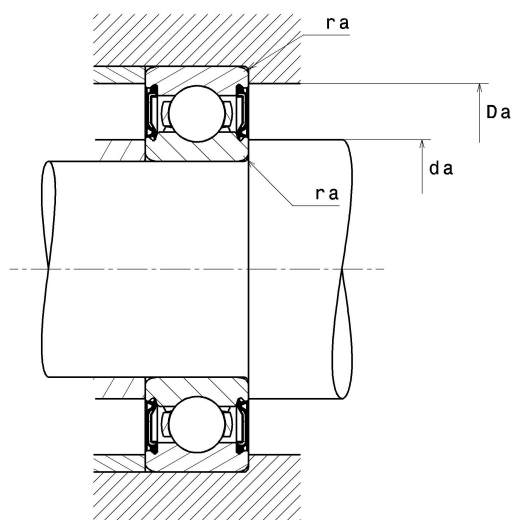

Abutment dimensions

da min	19 mm
da max	19.70 mm
Da max	31 mm
ra max	0.60 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot F_r + Y \cdot F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot F_r + Y_0 \cdot F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$