


PDF technical sheet 6204NRC3




Single row deep groove ball bearings

Product definition	
d	20 mm
D	47 mm
B	14 mm
a min	2.31 mm
a max	2.46 mm
Ca min	3.33 mm
Ca max	3.58 mm
rs min	1 mm
rNs min	0.50 mm
D3 max	44.60 mm
b min	1.35 mm
b max	1.65 mm
r0 max	0.40 mm
D4 max	52.70 mm
f	1.12 mm
Snap ring reference	R47
Radial clearance class	C3
Mass	0.11 kg
Brand	NTN

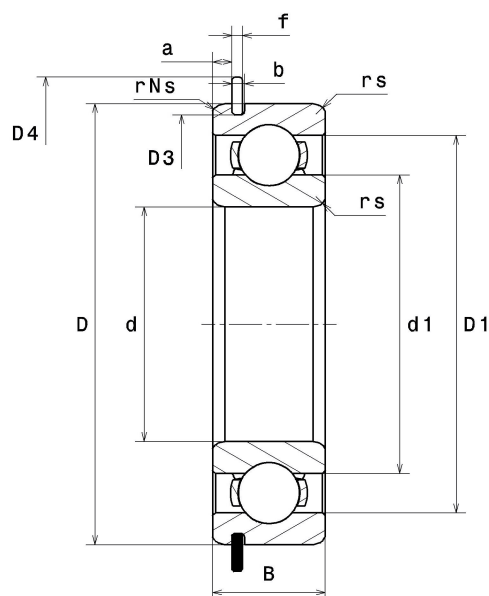

Product performance	
Dynamic load, C	12.80 kN
Static load, C0	6.65 kN
Fatigue limit load, Cu	0.30 kN
f0	13.2
Nlim (oil)	18,000 Tr/min
Nlim (grease)	16,000 Tr/min
Min operating temperature, Tmin	-60 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.12 Hz
Characteristic outer ring frequency, BPF0	3.08 Hz
Characteristic inner ring frequency, BPFI	4.92 Hz

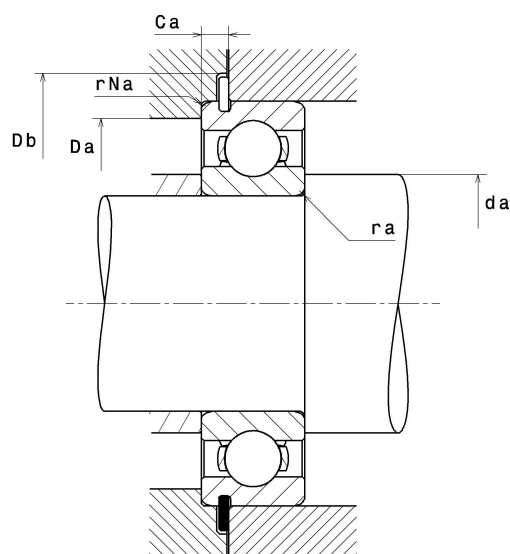

Abutment dimensions

da min	25 mm
Da max	42 mm
ra max	1 mm
rNa max	0.50 mm
Db min	53.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / Fr \leq e$		$F_a / Fr > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < Fr$, then use $P_0 = Fr$