

PDF technical sheet

6313N




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, snap ring groove on outer diameter, open


Product definition

d	65 mm
D	140 mm
B	33 mm
a min	4.65 mm
a max	4.90 mm
rs min	2.10 mm
rNs min	0.50 mm
D3 max	135.23 mm
b min	3.10 mm
b max	3.40 mm
r0 max	0.60 mm
Radial clearance class	CN
Mass	2.08 kg
Brand	NTN

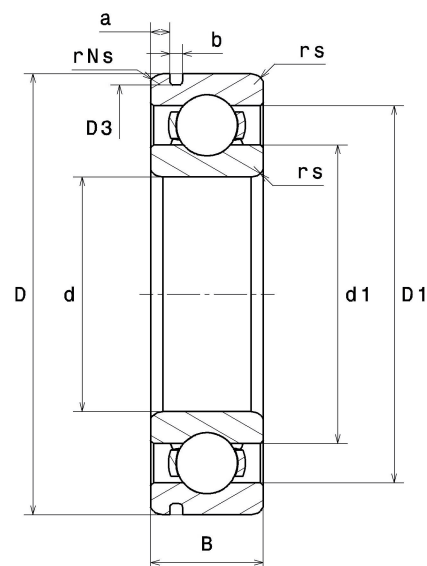

Product performance

Dynamic load, C	92.50 kN
Static load, C0	60 kN
Fatigue limit load, Cu	2.70 kN
f0	13.2
Nlim (oil)	5,800 Tr/min
Nlim (grease)	4,900 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	4.07 Hz
Characteristic outer ring frequency, BPF0	3.07 Hz
Characteristic inner ring frequency, BPF1	4.93 Hz

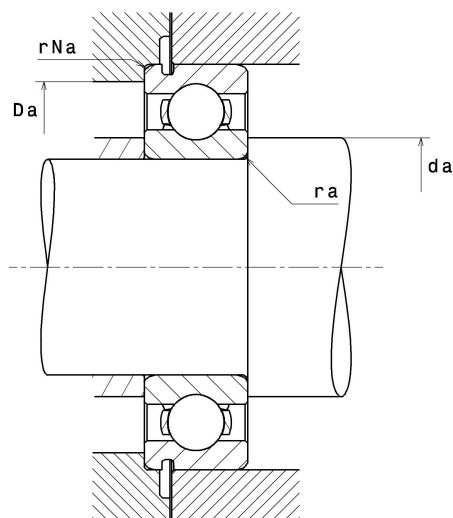

Abutment dimensions

da min	76 mm
Da max	129 mm
ra max	2 mm
rNa max	0.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / Fr \leq e$		$F_a / Fr > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < Fr$, then use $P_0 = Fr$