


PDF technical sheet ML71914HVUJ74S




High precision angular contact ball bearings

High precision angular contact ball bearing, high speed series ML, laminated resin cage centred on outer ring


Product definition

d	70 mm
D	100 mm
B	16 mm
d1	80.10 mm
d2	77.85 mm
D1	91.96 mm
D2	94.11 mm
a	28 mm
Contact angle, α	25 °
rs min	1 mm
r1s min	0.30 mm
f0	8.709
Precision class	P4S
Mass	0.33 kg
Brand	SNR

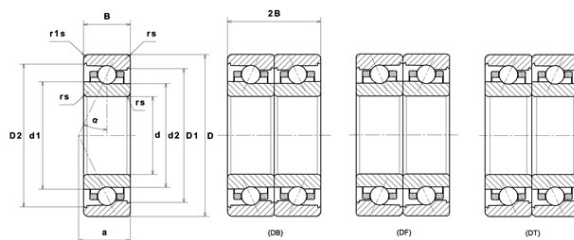

Product performance

Dynamic load, C	12.40 kN
Static load, C0	10.20 kN
Fatigue limit load, Cu	0.59 kN
Nlim (oil)	23,000 Tr/min
Nlim (grease)	16,000 Tr/min
Axial displacement K Factor	0.54
Preload level	7
Peloid value	100 kN
axial rigidity	135 N/ μ m
radial rigidity	297 N/ μ m
Min operating temperature, Tmin	-30 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.47 Hz
Characteristic rolling element frequency, BSF	13.21 Hz
Characteristic outer ring frequency, BPF0	14.91 Hz
Characteristic inner ring frequency, BPF1	17.09 Hz

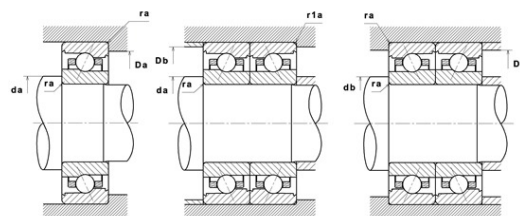

Abutment dimensions

da min	75.50 mm
db min	75.50 mm
Da max	94.50 mm
Db max	94.50 mm
r1a max	0.30 mm
ra max	1 mm
D6	82.30 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$