

PDF technical sheet 6315L1C3




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, machined cage, open


Product definition

d	75 mm
D	160 mm
B	37 mm
rs min	2.10 mm
Radial clearance class	C3
Mass	3.02 kg
Brand	NTN

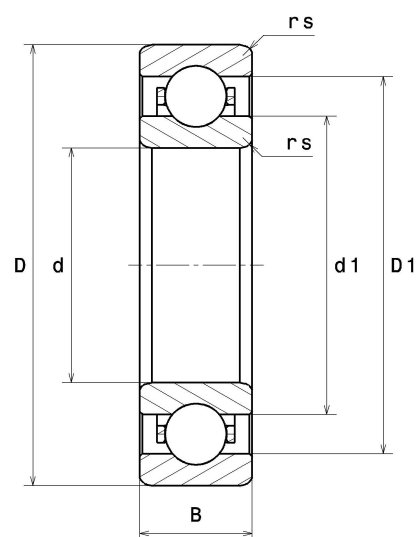

Product performance

Dynamic load, C	113 kN
Static load, C0	77 kN
Fatigue limit load, Cu	3.25 kN
f0	13.2
Nlim (oil)	5,000 Tr/min
Nlim (grease)	4,300 Tr/min
Min operating temperature, Tmin	-60 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.12 Hz
Characteristic outer ring frequency, BPF0	3.08 Hz
Characteristic inner ring frequency, BPF1	4.92 Hz

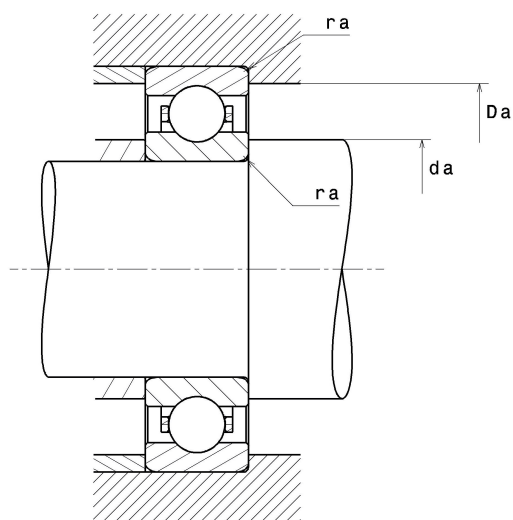

Abutment dimensions

da min	86 mm
Da max	149 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$