


PDF technical sheet 7016CVUJ74




High precision angular contact ball bearings

High precision angular contact ball bearing, laminated resin cage centred on outer ring


Product definition

d	80 mm
D	125 mm
B	22 mm
d1	94.30 mm
D1	110.70 mm
D2	117.49 mm
a	25 mm
Contact angle, α	15 °
rs min	1.10 mm
r1s min	0.60 mm
f0	15.732
Precision class	P4
Mass	0.85 kg
Brand	SNR

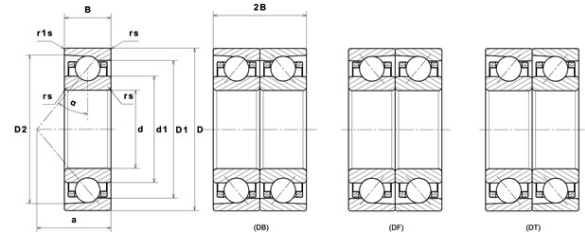

Product performance

Dynamic load, C	58.70 kN
Static load, C0	55.30 kN
Fatigue limit load, Cu	2.95 kN
Nlim (oil)	17,000 Tr/min
Nlim (grease)	11,000 Tr/min
Axial displacement K Factor	1.01
Preload level	7
Peload value	310 kN
axial rigidity	98 N/ μ m
radial rigidity	564 N/ μ m
Min operating temperature, Tmin	-30 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.47 Hz
Characteristic outer ring frequency, BPF0	8.73 Hz
Characteristic inner ring frequency, BPF1	11.27 Hz

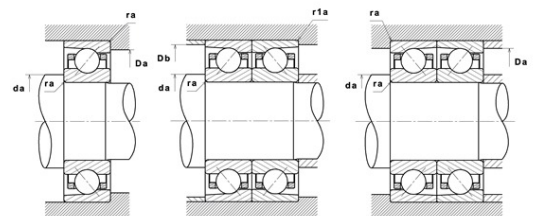

Abutment dimensions

da min	87 mm
db min	87 mm
Da max	118 mm
Db max	118 mm
r1a max	0.60 mm
ra max	1 mm
D6	98.70 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.Fr + Y.Fa$$

Series	e	Single or DT bearing arrangement				DB or DF arrangement				
		Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e		
		X	Y	X	Y	X	Y	X	Y	
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	0.72	2.39
		0.357	0.4				1.4			2.28
		0.714	0.43				1.3			2.11
		1.07	0.46				1.23			2
		1.43	0.47				1.19			1.93
		2.14	0.5				1.12			1.82
		3.57	0.55				1.02			1.66
		5.35	0.56							1.63
	7.14	0.56	1	1.63						
	25°	0.68		0.41	0.87		0.92	0.67	1.41	
30°	0.8		0.39	0.76		0.78	0.63	1.24		

Equivalent static radial load

$$P_o = X_o.Fr + Y_o.Fa$$

Series	e	Single or DT bearing arrangement		DB or DF arrangement	
		X _o	Y _o	X _o	Y _o
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.5	0.46	1	0.92
	25°		0.38		0.76
	30°		0.33		0.66

For single or DT bearing arrangement :

If $P_o < Fr$, then use $P_o = Fr$