

PDF technical sheet

7909UADG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls


Product definition

d	45 mm
D	68 mm
B	12 mm
d1	52.70 mm
d2	50.80 mm
D1	60.40 mm
D2	64 mm
a	19.20 mm
Contact angle, α	25 °
rs min	0.60 mm
r1s min	0.30 mm
f0	16.1
Precision class	P42
Mass	0.12 kg
Brand	NTN

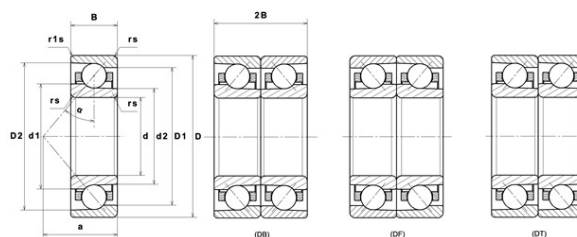

Product performance

Dynamic load, C	17 kN
Static load, C0	14.10 kN
Nlim (oil)	29,000 Tr/min
Nlim (grease)	18,000 Tr/min
Preload level	GN
Peload value	167 kN
axial rigidity	127.3 N/ μ m
radial rigidity	269.5 N/ μ m
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.81 Hz
Characteristic outer ring frequency, BPF0	8.41 Hz
Characteristic inner ring frequency, BPFI	10.59 Hz

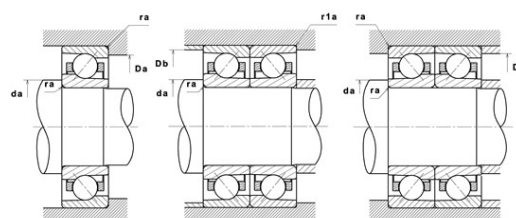

Abutment dimensions

da min	49.50 mm
Da max	63.50 mm
Db max	65.50 mm
r1a max	0.30 mm
ra max	0.60 mm
D6	52.80 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68	1	0	0.41	0.87	1	0.92	0.67	1.41
	30°		0.8								0.78

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$