

PDF technical sheet 6310FT150




Single row deep groove ball bearings

TOPLINE deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides, applications upto 150 °C.


Product definition

d	50 mm
D	110 mm
B	27 mm
d1	64.70 mm
D1	98 mm
rs min	2 mm
Radial clearance class	C3
Mass	1.07 kg
Brand	SNR

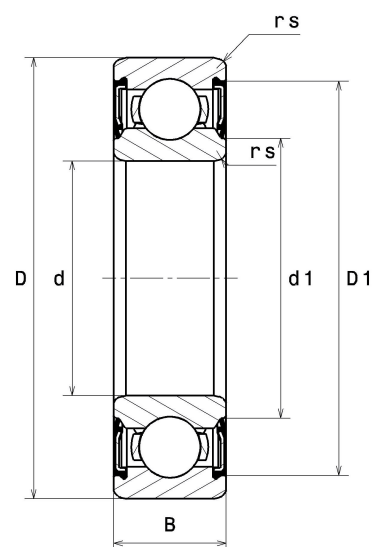

Product performance

Dynamic load, C	61.30 kN
Static load, C0	38.30 kN
Fatigue limit load, Cu	1.74 kN
f0	13.2
Nlim	4,400 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	150 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	4.07 Hz
Characteristic outer ring frequency, BPF0	3.07 Hz
Characteristic inner ring frequency, BPFI	4.93 Hz

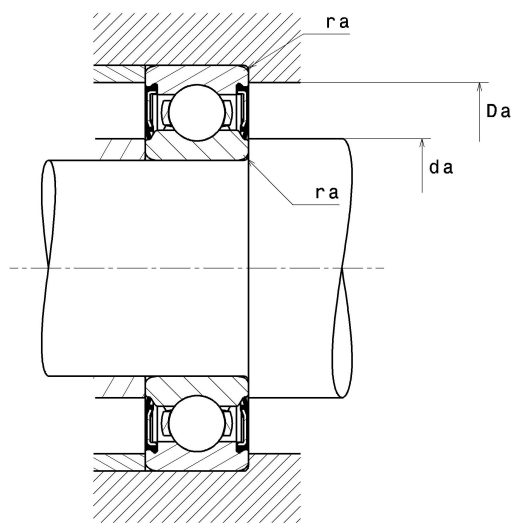

Abutment dimensions

da min	59 mm
da max	64.70 mm
Da max	101 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$