



PDF technical sheet 7213HG1UJ74




High precision angular contact ball bearings

High precision angular contact ball bearing, laminated resin cage centred on outer ring

Product definition	
d	65 mm
D	120 mm
B	23 mm
d1	82.80 mm
D1	102.30 mm
D2	109.98 mm
a	33 mm
Contact angle, α	25 °
rs min	1.50 mm
r1s min	1.10 mm
f0	15.035
Precision class	P4
Mass	1.14 kg
Brand	SNR

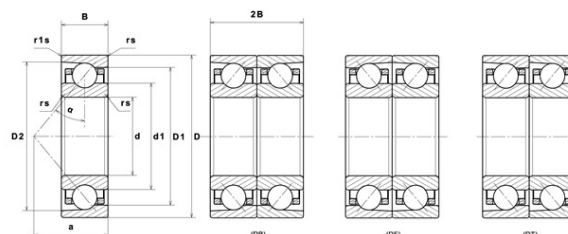

Product performance	
Dynamic load, C	66.40 kN
Static load, C0	54.90 kN
Fatigue limit load, Cu	3.05 kN
Nlim (oil)	15,500 Tr/min
Nlim (grease)	10,500 Tr/min
Axial displacement K Factor	0.52
Preload level	7
Peloid value	590 kN
axial rigidity	227 N/ μ m
radial rigidity	484 N/ μ m
Min operating temperature, Tmin	-30 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.69 Hz
Characteristic outer ring frequency, BPF0	6.76 Hz
Characteristic inner ring frequency, BPF1	9.24 Hz

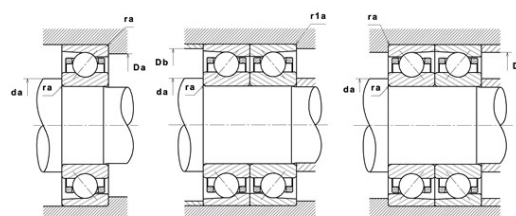

Abutment dimensions

da min	73.50 mm
db min	73.50 mm
Da max	111.50 mm
Db max	111.50 mm
r1a max	1 mm
ra max	1.50 mm
D6	88.30 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$