


Adapters

EMK4 Union elbow


BSPP 60° Cone end (ISO 8434-6)



Thread BSPP T4	D mm	L mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar)
1/8	4	17	11	21	2EMK4S	2EMK4SS	350
1/4	5	24	14	45	4EMK4S	4EMK4SS	350
3/8	8	27	19	85	6EMK4S	6EMK4SS	350
1/2	11	32	22	123	8EMK4S	8EMK4SS	200
5/8	14	34	22	109	10EMK4S	10EMK4SS	200
3/4	17	36	27	178	12EMK4S	12EMK4SS	200
1	22	42	33	288	16EMK4S	16EMK4SS	120
1 1/4	29	48	41	512	20EMK4S	20EMK4SS	105
1 1/2	33	54	48	824	24EMK4S	24EMK4SS	105

JMK4 Union tee

BSPP 60° Cone end (ISO 8434-6)

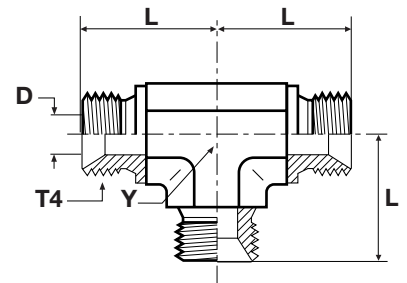

Thread BSPP T4	D mm	L mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar)
1/8	4	17	11	33	2JMK4S	2JMK4SS	350
1/4	5	24	14	61	4JMK4S	4JMK4SS	350
3/8	8	27	19	105	6JMK4S	6JMK4SS	350
1/2	11	32	22	157	8JMK4S	8JMK4SS	200
5/8	14	34	22	145	10JMK4S	10JMK4SS	200
3/4	17	36	27	258	12JMK4S	12JMK4SS	200
1	22	42	33	591	16JMK4S	16JMK4SS	120
1 1/4	29	48	41	646	20JMK4S	20JMK4SS	105
1 1/2	33	54	48	940	24JMK4S	24JMK4SS	105

Order codes shown are part of our current manufacturing programme.
Imperial and metric parts may vary in hexagon dimensions.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Pressure ratings – PN shown, apply to Steel and Stainless Steel versions of the product.