




Technical datasheet

62/28NR

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, open

Visual(s)

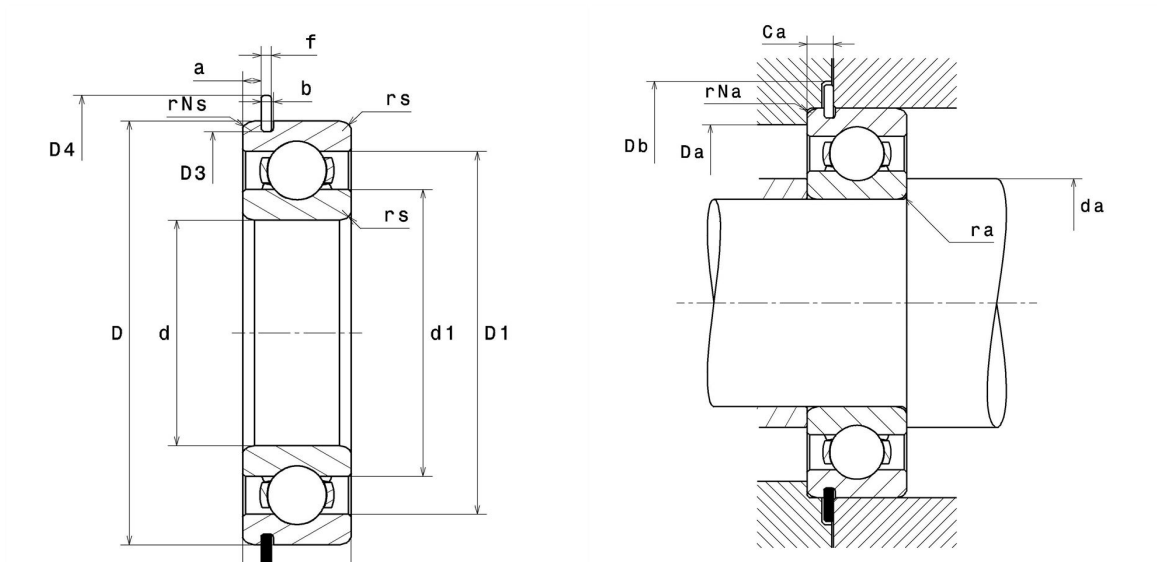

Product definition

d	28 mm
D	58 mm
B	16 mm
a min	2.31 mm
a max	2.46 mm
Ca min	3.43 mm
Ca max	3.58 mm
rs min	1 mm
rNs min	0.5 mm
D3 max	55.6 mm
b min	1.35 mm
b max	1.65 mm
r0 max	0.4 mm
D4 max	63.7 mm
f	1.12 mm
Snap ring reference	R58
Radial clearance class	CN
Mass	0.17 kg
Brand	NTN

Product performance

Dynamic load, C	17.9 kN
Static load, C0	9.75 kN
Fatigue limit load, Cu	0.44 kN
f0	13.4
Nlim (oil)	14,000 rpm
Nlim (grease)	12,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.29 Hz
Characteristic outer ring frequency, BPF0	3.11 Hz
Characteristic inner ring frequency, BPFI	4.89 Hz

Abutment dimensions

da min	33 mm
Da max	53 mm
ra max	1 mm
rNa max	0.5 mm
Db min	64.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$