



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 55175C, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

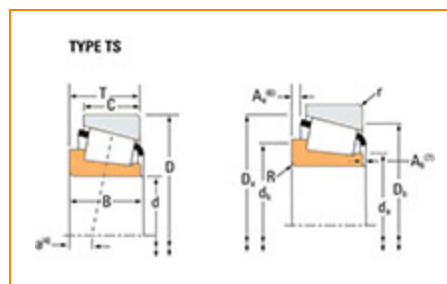

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	55000C
Cone Part Number	55175C
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹	59200 lbf 263000 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)²	15300 lbf 68200 N



Dimensions

d - Cone Bore	1.7500 in 44.450 mm
----------------------	------------------------

B - Cone Width	1.0594 in 26.909 mm
-----------------------	------------------------

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.140 in 3.60 mm
--	---------------------

da - Cone Frontface Backing Diameter	2.52 in 64 mm
---	------------------

db - Cone Backface Backing Diameter	2.76 in 70 mm
--	------------------

Ab - Cage-Cone Frontface Clearance	0.16 in 4.1 mm
---	-------------------

Aa - Cage-Cone Backface Clearance	0.17 in 4.3 mm
--	-------------------

a - Effective Center Location⁴	0.3 in 7.6 mm
--	------------------

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	8810 lbf 39200 N
---	---------------------

C1 - Dynamic Radial Rating (1 million revolutions)⁶	34000 lbf 151000 N
---	-----------------------

C0 - Static Radial Rating	36200 lbf 161000 N
----------------------------------	-----------------------

C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	13300 lbf 59300 N
---	----------------------

Factors

K - Factor⁸	0.66
G1 - Heat Generation Factor (Roller-Raceway)	48.7
G2 - Heat Generation Factor (Rib-Roller End)	18.1
Cg - Geometry Factor⁹	0.120

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

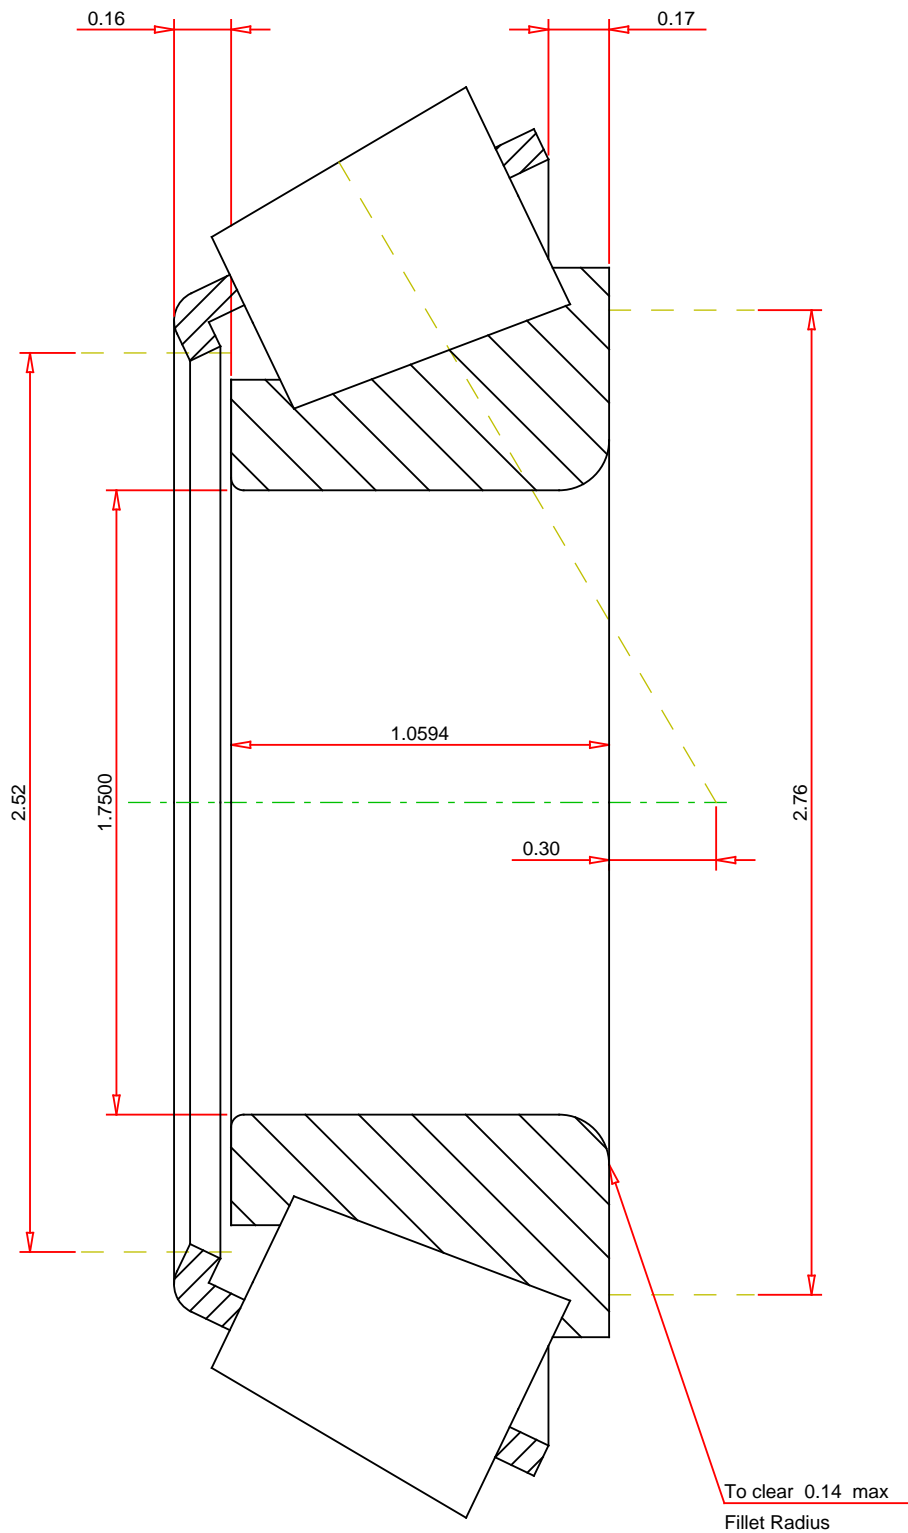

IMPERIAL UNITS

Number of Rollers Per Row
