


NTN BEARING CORPORATION OF AMERICA

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.


Phone: 847-298-7500

Fax: 847-699-9744

Toll Free: 800-323-2358

Email: mkt@ntnamerica.com
Website: www.ntnamericas.com

Item # UKP316D1 (When used with H2316X), Pillow Block Unit, Adapter, Cast Housing, UKP Type

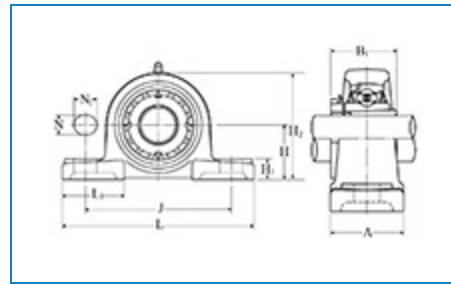
[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)
Order Now
Ordering Options


[Order Online through NTN DOL](#)
[Contact NTN Customer Relations](#)
[Search for a Licensed Distributor](#)

Technical Specifications

Type	Pillow Block Unit
Bearing Type	Ball Bearing
Locking Device	Adapter
Seal Type	Contact
Seal Material	Nitrile Rubber

Bearing Number	UK316D1
Housing Number	P316D1
Housing Material	Cast Iron
Housing Construction	1 piece
End Type	Open
Performance	Heavy Duty
Dynamic Load Rating	27700 lbf 123000 N 123.00 kN
Static Load Rating	19400 lbf 86500 N 86.50 kN
Weight	37.000 lb 17.000 kg
Operating Temperature Range	-40 to 250 °F -40 to 120 °C
Lubrication	Relubricatable

Dimensional Specifications

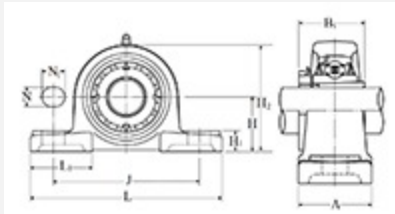

Pillow Block Unit, Adapter, Cast Housing, UKP Type - Dimensions

d	2.7559 in 70.000 mm
J	11.8125 in 300.0 mm
L	15.7500 in 400.0 mm

A	4.3437 in 110.0 mm
H	4.1719 in 106.0 mm
H1	1.5625 in 40.0 mm
H2	8.2812 in 210.0 mm
L1	4.3437 in 110.0 mm
N	1.0625 in 27.0 mm
N1	1.5625 in 40.0 mm
B1	3.0710 in 78.000 mm
F	0.4488 in 11.400 mm
Notes	Sales drawing reflects "Bore Size w/o Adapter". They do not show the "d" dimension, which is the bore size with adapter