




Technical data

62/32C3

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, open

Visual(s)

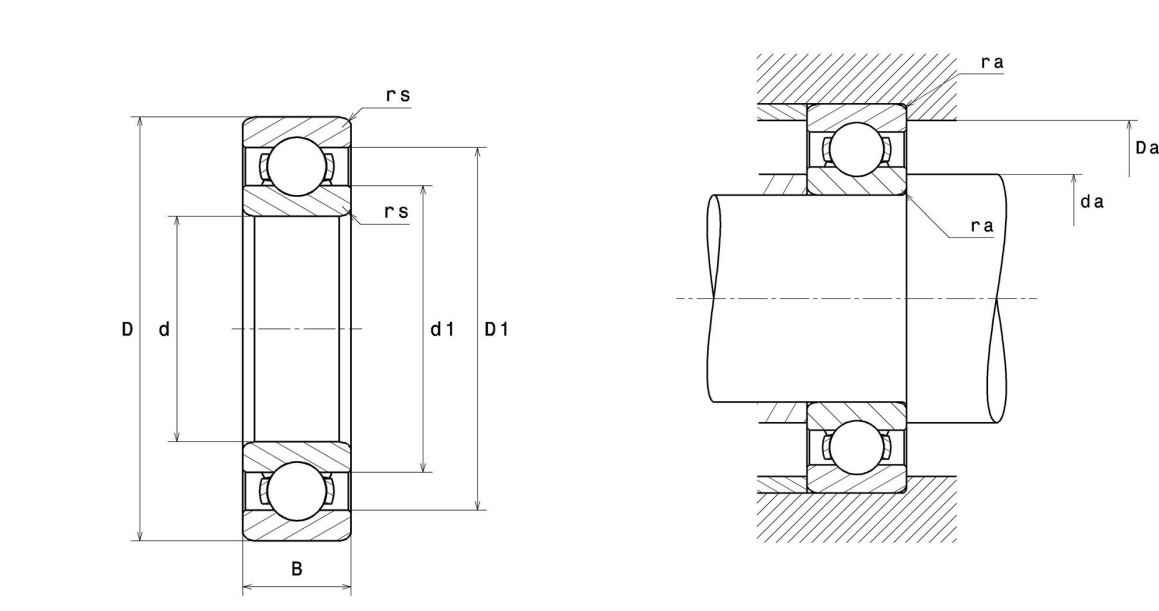

Product definition

d	32 mm
D	65 mm
B	17 mm
rs min	1 mm
Radial clearance class	C3
Mass	0.23 kg
Brand	NTN

Product performance

Dynamic load, C	20.7 kN
Static load, C₀	11.6 kN
Fatigue limit load, C_u	0.53 kN
f₀	13.6
N_{lim} (oil)	12,000 Tr/min
N_{lim} (grease)	11,000 Tr/min
Min operating temperature, T_{min}	-60 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.49 Hz
Characteristic outer ring frequency, BPF₀	3.15 Hz
Characteristic inner ring frequency, BPF_I	4.85 Hz

Abutment dimensions

da min	37 mm
Da max	60 mm
ra max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$