



CF – Female Metric 24° – Light Series with O-ring – Swivel – 90° Elbow

ISO 12151-2-SWE-L – DKOL 90°



Approved fitting series for hose types:

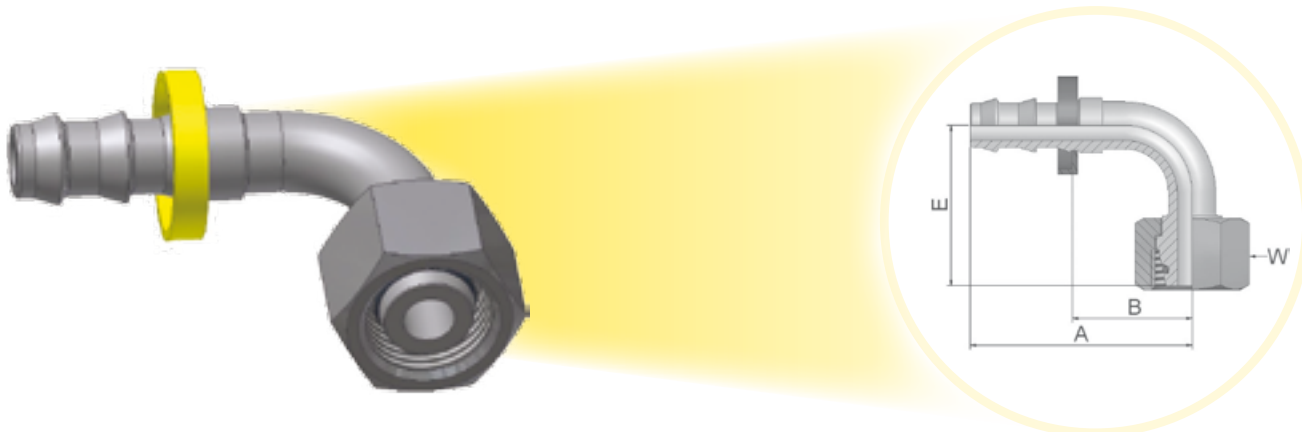

 XXXX.XX.XX Part Number 	 Hose I.D.				 Thread metric	Tube O.D.	A	B	E	 W
	DN	Inch	Size	mm		mm	mm	mm	mm	mm
3CF82-6-4	6	1/4	-4	6,3	M12x1,5	6	42	23	36	14
3CF82-8-4	6	1/4	-4	6,3	M14x1,5	8	42	23	32	17
3CF82-10-4	6	1/4	-4	6,3	M16x1,5	10	42	23	31	19
3CF82-10-6	10	3/8	-6	9,5	M16x1,5	10	49	27	35	19
3CF82-10-6B	10	3/8	-6	9,5	M16x1,5	10	49	27	35	19
3CF82-12-6	10	3/8	-6	9,5	M18x1,5	12	49	27	36	22
3CF82-12-6B	10	3/8	-6	9,5	M18x1,5	12	49	27	36	22
3CF82-15-8	12	1/2	-8	12,7	M22x1,5	15	58	32	41	27
3CF82-18-10	16	5/8	-10	15,9	M26x1,5	18	74	37	45	32
3CF82-22-12	20	3/4	-12	19,1	M30x2	22	88	51	55	36

Material: Steel chromium(VI)-free plated

B & BK parts have brass nipples and steel nuts.

Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.

Special O-rings are available on request.

Information about standard products or non-standard products can be found in the current price list.
Dimensions shown may be changed at any time without prior notice.