



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKP205 - HE2305, UKP 200 Pillow Block Mounted Bearings - Adapter Sleeve Locking

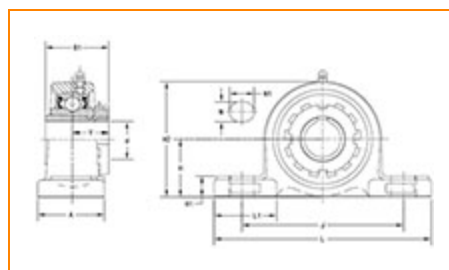

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK205 - HE2305
Shaft Size d	0.7500 in
Adapter Sleeve Number¹	HE2305
Locking Style	Adapter Sleeve Locking
Housing Construction	Two-Bolt Pillow Block

Dimensions

Base to Center Height H	36.5 mm 1.437 in
Total Length L	140 mm 5.512 in
Housing Width A	38 mm 1.496 in




Bolt Hole Spacing J	105 mm 4.134 in
Bolt Hole Size N	13 mm 0.512 in
Bolt Hole Length N1	18 mm 0.709 in
Foot Height H1	16 mm
Total Height H2	70 mm 2.756 in
Dimension L1	37.5 mm 1.476 in
Center of Bearing from End Y	20 mm 0.787 in
Dimension B1	35 mm 1.3780 in

Basic Load Ratings

Static Load Rating	7900 N 1765 lbf
Dynamic Load Rating	14000 N 3147 lbf

¹ Purchase the Adapter Sleeve separately

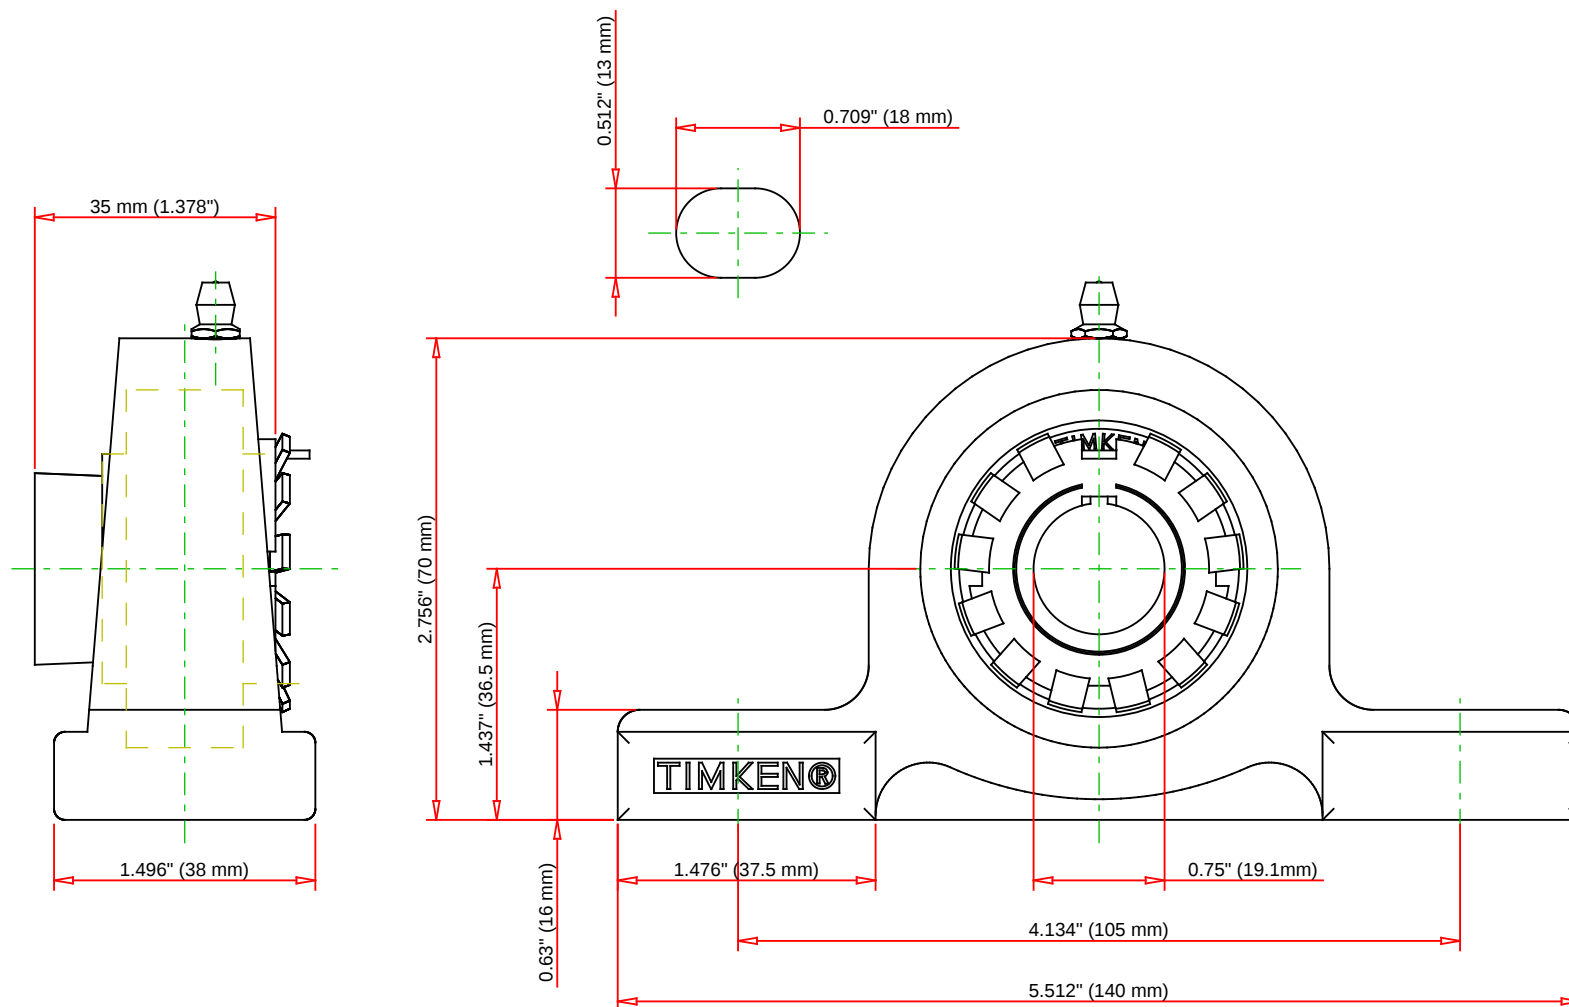

Note: Adapter sold separately

Bearing Number	UK205 - HE2305			
Load Ratings - C _r	3147	lbf	14000	N
Load Ratings - C _{0r}	1765	lbf	7900	N
Weight	2	lb	0.9	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UKP205 - HE2305
UKP 200 Pillow Block Mounted Bearings -
Adapter Sleeve Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY