




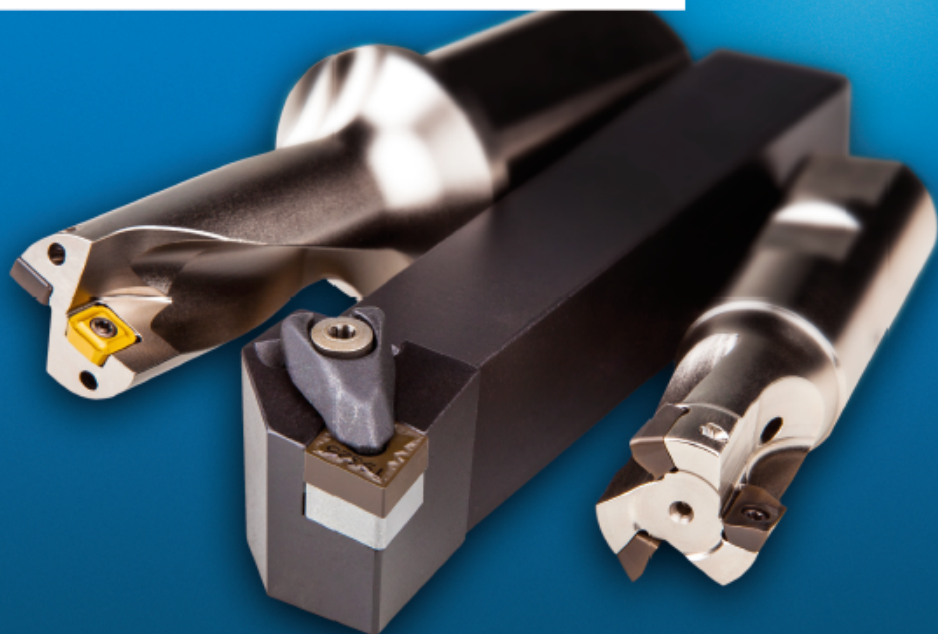

Catalog

2015

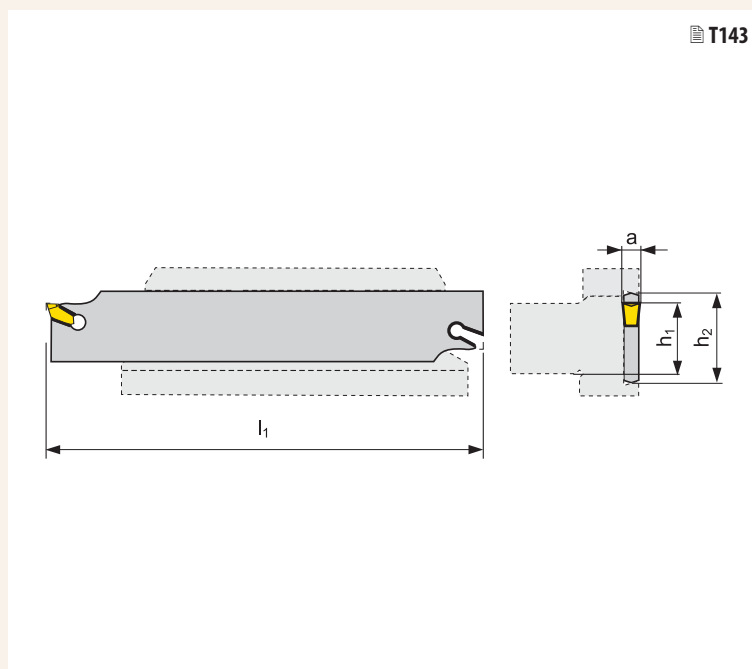

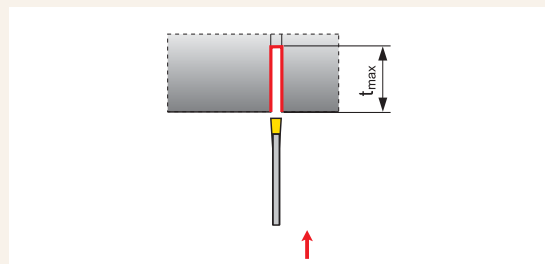

BLADES FOR PARTING & GROOVING

Designation	Assortment	Dimensions						[lbs]	Spare parts	Inserts
		h_1	h_2	l_1	a	t_{max}	Holder			
XLCFN 2601 J 1.60	●	.787	1.024	4.331	.059 - .063	.591	26-D.	.07	KV	LFMX 1.50..., LFMX 1.60...
XLCFN 2601 J 2.00	●	.787	1.024	4.331	.079-.087	.984	26-D.	.09	KV	LFMX 2.00..., LFMX 2.20...
XLCFN 2602 J 3.00	●	.787	1.024	4.331	.122	1.476	26-D.	.11	KV	LFMX 3.10...
XLCFN 2603 J 4.00	●	.787	1.024	4.331	.161	1.575	26-D.	.13	KV	LFMX 4.10...
XLCFN 3201 M 1.60	●	.984	1.260	5.906	.059 - .063	.591	32-D.	.13	KV	LFMX 1.50..., LFMX 1.60...
XLCFN 3201 M 2.00	●	.984	1.260	5.906	.079-.087	.984	32-D.	.15	KV	LFMX 2.00..., LFMX 2.20...
XLCFN 3202 M 3.00	●	.984	1.260	5.906	.122	1.969	32-D.	.18	KV	LFMX 3.10...
XLCFN 3203 M 4.00	●	.984	1.260	5.906	.161	1.969	32-D.	.24	KV	LFMX 4.10...
XLCFN 3204 M 5.00	●	.984	1.260	5.906	.201	2.362	32-D.	.31	KV	LFMX 5.10...
XLCFN 3205 M 6.35	●	.984	1.260	5.906	.250	2.362	32-D.	.37	KV	LFMX 6.35...
XLCFN 4502 S 3.00	●	1.260	1.772	9.843	.122	3.150	45-D.	.26	KV	LFMX 3.10...
XLCFN 4503 S 4.00	●	1.260	1.772	9.843	.161	3.150	45-D.	.42	KV	LFMX 4.10...
XLCFN 4504 S 5.00	●	1.260	1.772	9.843	.201	3.150	45-D.	.62	KV	LFMX 5.10...
XLCFN 4505 S 6.35	●	1.260	1.772	9.843	.250	3.150	45-D.	.88	KV	LFMX 6.35...

All Dimensions

SPARE PARTS

*) See pages T254-T255 for recommended screw torques

Type	Extractor					
KV	KV 5x70					