



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKP209 - HE2309, UKP 200 Pillow Block Mounted Bearings - Adapter Sleeve Locking

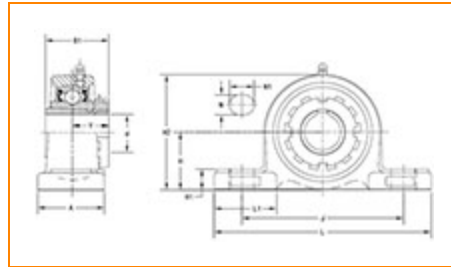

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK209 - HE2309
Shaft Size d	1 1/2 in
Adapter Sleeve Number¹	HE2309
Locking Style	Adapter Sleeve Locking
Housing Construction	Two-Bolt Pillow Block

Dimensions

Base to Center Height H	54 mm 2.126 in
Total Length L	190 mm 7.48 in
Housing Width A	54 mm 2.126 in



Bolt Hole Spacing J	146 mm 5.748 in
Bolt Hole Size N	17 mm 0.669 in
Bolt Hole Length N1	21 mm 0.827 in
Foot Height H1	20 mm
Total Height H2	106 mm 4.173 in
Dimension L1	55 mm 2.165 in
Center of Bearing from End Y	29 mm 1.142 in
Dimension B1	50 mm 1.969 in

Basic Load Ratings

Static Load Rating	21300 N 4788 lbf
Dynamic Load Rating	34100 N 7666 lbf

¹ Purchase the Adapter Sleeve separately

