



Square flanged unit, cast housing
Set screw type

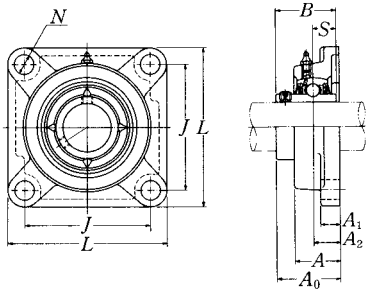

Shaft dia.	Unit number ⁽¹⁾	Nominal dimensions									Bolt size
		mm inch									
		<i>L</i>	<i>J</i>	<i>A</i> ₂	<i>A</i> ₁	<i>A</i>	<i>N</i>	<i>A</i> ₀	<i>B</i>	<i>S</i>	mm inch
85	UCFX17D1	214	171	40	24	70	23	96.3	96	39.7	M20
3 ⁵ / ₁₆	UCFX17-305D1	8 ⁷ / ₁₆	6 ⁴⁷ / ₆₄	1 ³⁷ / ₆₄	¹⁵ / ₁₆	2 ³ / ₄	²⁹ / ₃₂	3 ⁵¹ / ₆₄	3.7795	1.563	³ / ₄
3 ⁷ / ₁₆	UCFX17-307D1										
90	UCFX18D1	214	171	45	24	76	23	106.1	104	42.9	M20
3 ⁷ / ₁₆	UCFX18-307D1	8 ⁷ / ₁₆	6 ⁴⁷ / ₆₄	1 ⁴⁹ / ₆₄	¹⁵ / ₁₆	3	²⁹ / ₃₂	4 ¹¹ / ₆₄	4.0945	1.689	³ / ₄
3 ¹ / ₂	UCFX18-308D1										
100	UCFX20D1	268	211	59	31	97	31	127.3	117.5	49.2	M27
3 ¹³ / ₁₆	UCFX20-313D1										
3 ⁷ / ₈	UCFX20-314D1										
3 ¹⁵ / ₁₆	UCFX20-315D1	10 ⁹ / ₁₆	8 ⁵ / ₁₆	2 ²¹ / ₆₄	1 ⁷ / ₃₂	3 ¹³ / ₁₆	1 ⁷ / ₃₂	5 ¹ / ₆₄	4.6260	1.937	1
4	UCFX20-400D1										

Note ⁽¹⁾ These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Remarks Please refer to page A21 for size of grease fitting.

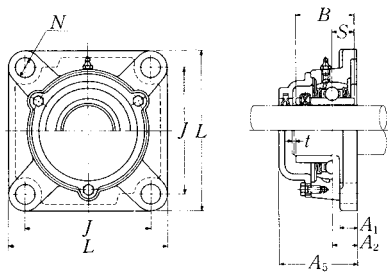

Cast dust cover type
Open end C-UCF...D1
Closed end CM-UCF...D1

Bearing number	Housing number	Unit number ⁽¹⁾ cast dust cover type	Nominal dimensions		Mass of unit	
			mm inch t max.	A ₅	kg lb UCF C(CM)	
UCX17D1	FX17D1	C(CM)-UCFX17D1	5	122	12 14	
UCX17-305D1	FX17D1	C(CM)-UCFX17-305D1	13/64	4 13/16	26 31	
UCX17-307D1	FX17D1	C(CM)-UCFX17-307D1				
UCX18D1	FX18D1	C(CM)-UCFX18D1	5	135	13 15	
UCX18-307D1	FX18D1	C(CM)-UCFX18-307D1	13/64	5 5/16	29 33	
UCX18-308D1	FX18D1	C(CM)-UCFX18-308D1				
UCX20D1	FX20D1	C(CM)-UCFX20D1	5	146.5	21 23	
UCX20-313D1	FX20D1	C(CM)-UCFX20-313D1				
UCX20-314D1	FX20D1	C(CM)-UCFX20-314D1				
UCX20-315D1	FX20D1	C(CM)-UCFX20-315D1	13/64	5 25/32	46 51	
UCX20-400D1	FX20D1	C(CM)-UCFX20-400D1				