

# 2-Color Indication Type Solid State Auto Switch Rail Mounting Style D-F79W/D-F7PW/D-J79W



## Grommet


The proper operating range can be determined by the color of the light.

(Red → Green ← Red)




## Auto Switch Internal Circuit


### D-F79W




### D-F7PW



### D-J79W



## Indicator light/Display method

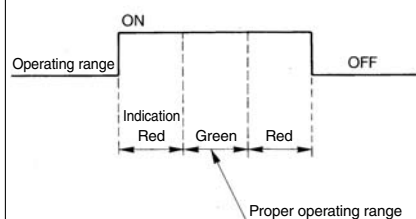

## Auto Switch Specifications



Refer to SMC website for the details of the products conforming to the international standards.

PLC: Programmable Logic Controller

### D-F7□W, D-J79W (With indicator light)

Auto switch model	D-F79W	D-F7PW	D-J79W
Wiring type	3-wire		2-wire
Output type	NPN	PNP	—
Applicable load	IC circuit, Relay, PLC		24 VDC Relay, PLC
Power supply voltage	5, 12, 24 VDC (4.5 to 28 VDC)		—
Current consumption	10 mA or less		—
Load voltage	28 VDC or less	—	24 VDC (10 to 28 VDC)
Load current	40 mA or less	80 mA or less	5 to 40 mA
Internal voltage drop	1.5 V or less (0.8 V or less at 10 mA load current)	0.8 V or less	4 V or less
Leakage current	100 $\mu$ A or less at 24 VDC		0.8 mA or less at 24 VDC
Indicator light	Operating range ..... Red LED illuminates. Proper operating range ..... Green LED illuminates.		
Standard	CE marking		

• Lead wires — Oilproof heavy-duty vinyl cord,  $\phi$ 3.4, 0.2 mm<sup>2</sup>, 3 cores (Brown, Black, Blue), 2 cores (Brown, Blue), 0.5 m

Note 1) Refer to page 1272 for solid state auto switch common specifications.

Note 2) Refer to page 1272 for lead wire lengths.

## Mass

(g)

Auto switch model	D-F79W	D-F7PW	D-J79W
Lead wire length (m)	0.5	13	11
	3	57	50
	5	92	81

## Dimensions

(mm)

