

Industrial drilling machine – HU 25E PGM Vario

MADE IN EUROPE

Huvema



3 YEARS

I

K1.2


Description

Precise, quiet and reliable industrial column drill with manual feed.

Built to the highest safety standards. The drill is adjustable in speed via adjustable v-belt transmission with potentiometer for variable speed. Equipped with a precision spindle with hardened morse cone. Equipped with a tilting table 350 x 250 mm with vice and rack.

Features

- Tiltable table with vice and rack
- Manual feed
- V-belt transmission
- Electronic potentiometer

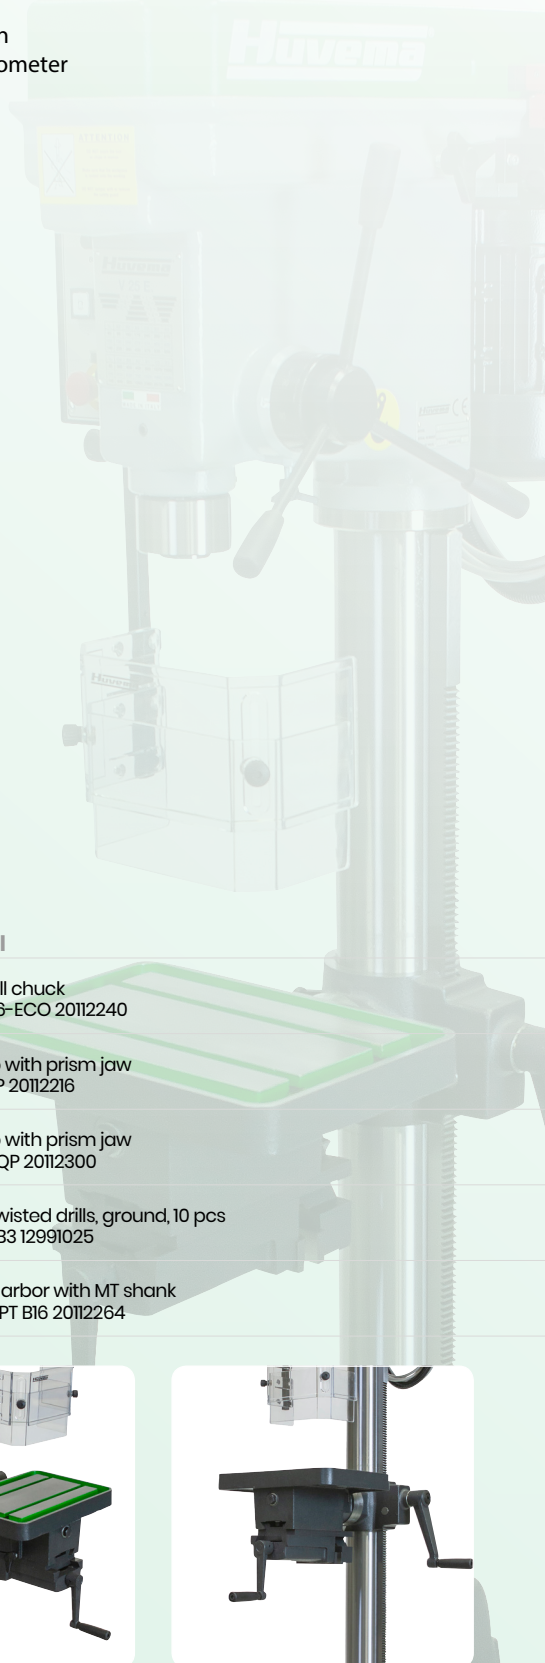

	HU 25E PGM Vario
	Item no. 11160
Drilling capacity in R50 steel	ø 25 mm
Tapping capacity in R50 steel	M 16
Quill taper	MT3
Drilling depth	100 mm
Column diameter	98 mm
Distance spindle-column	203 mm
Transmittance	Stepped pulley with potentiometer
Speed	var (98 ÷ 3.440) rpm
T-slot dimensions and interaxis	Nº 2 / 12 / 100 mm
T-slot sizes and interaxis for cross table	Nº 2 / 16 / 60 mm
Dimension of working table	350 x 250 mm
Worktable	Tilting table with vice and rack
Power	0.75 (1 speed / monophase) kW
Dimensions	1650 x 500 x 850 mm
Weight	185 kg
Voltage	230 V
Brand	Huvema Machine tools

Accessory optional



Keyless drill chuck
DC 1016-B16-ECO 20112240



Drill clamp with prism jaw
BKL K-125-P 20112216



Drill clamp with prism jaw
BKL K-100-QP 20112300



Set HSS Twisted drills, ground, 10 pcs
HB522-MTB3 12991025



Drill chuck arbor with MT shank
MTB 3 ADAPT B16 20112264



Website HU 25E PGM Vario