




Technical datasheet

6201LLUNR/5K

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, contact seals on both sides

Visual(s)

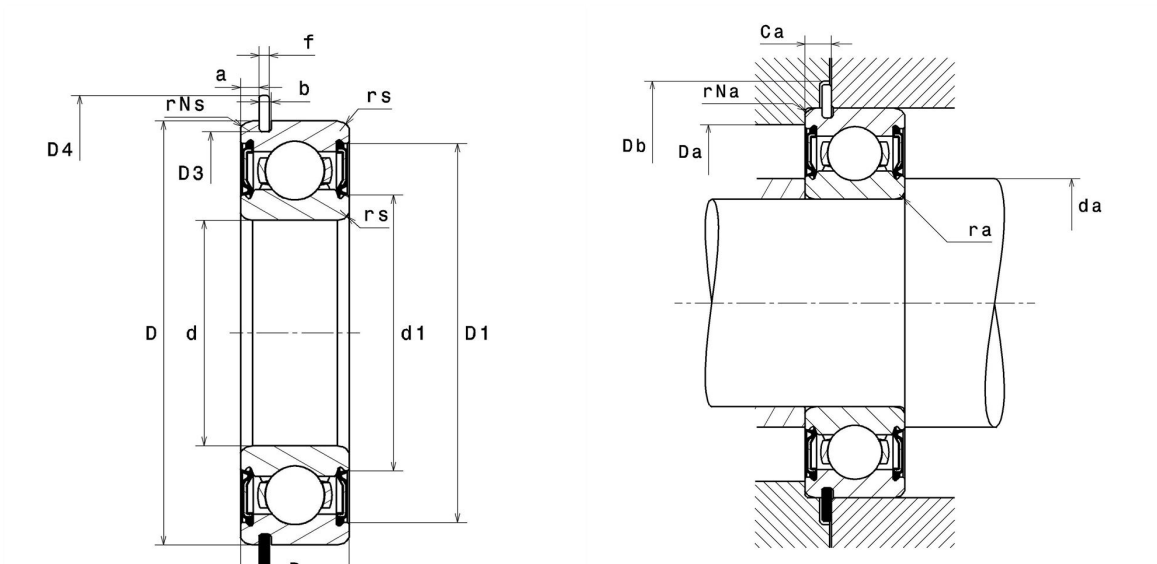

Product definition

d	12 mm
D	32 mm
B	10 mm
a min	1.9 mm
a max	2.06 mm
Ca min	2.92 mm
Ca max	3.18 mm
rs min	0.6 mm
rNs min	0.5 mm
D3 max	30.15 mm
b min	1.35 mm
b max	1.65 mm
r0 max	0.4 mm
D4 max	36.7 mm
f	1.12 mm
Snap ring reference	R32
Radial clearance class	CN
Mass	0.04 kg
Brand	NTN

Product performance

Dynamic load, C	6.1 kN
Static load, C0	2.75 kN
Fatigue limit load, Cu	0.13 kN
f0	12.7
Nlim (grease)	16,000 rpm
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.37 Hz
Characteristic rolling element frequency, BSF	3.71 Hz
Characteristic outer ring frequency, BPF0	2.62 Hz
Characteristic inner ring frequency, BPFI	4.38 Hz

Abutment dimensions

da min	16 mm
da max	17 mm
Da max	28 mm
ra max	0.6 mm
rNa max	0.5 mm
Db min	37.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$