




Technical data

6012LLUNR/2AS

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, contact seals on both sides

Visual(s)

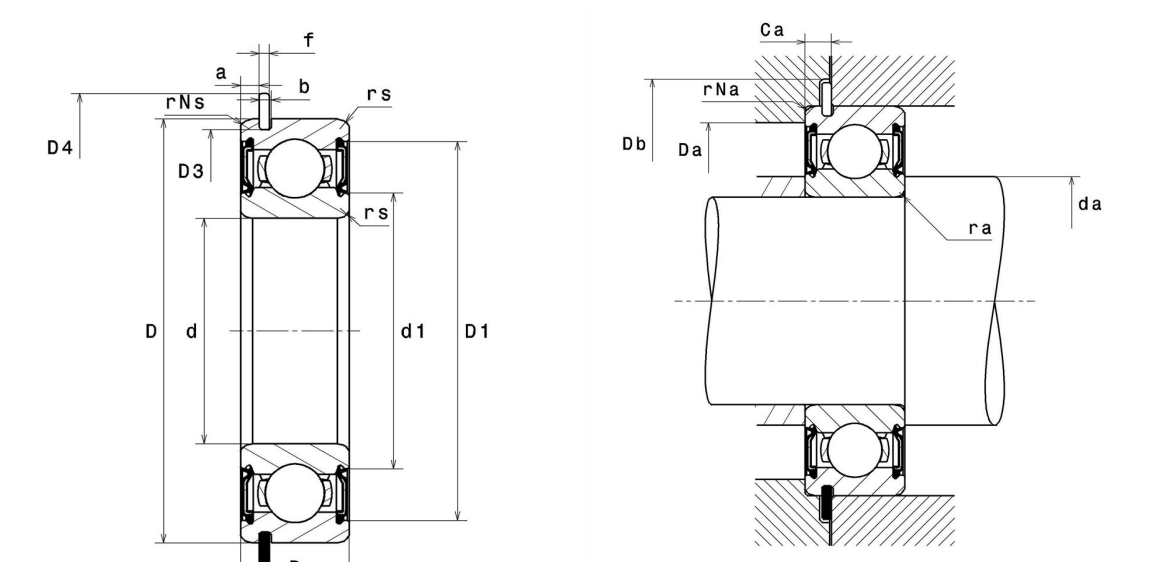

Product definition

d	60 mm
D	95 mm
B	18 mm
a min	2.67 mm
a max	2.87 mm
Ca min	5.13 mm
Ca max	5.33 mm
rs min	1.1 mm
rNs min	0.5 mm
D3 max	91.82 mm
b min	2.7 mm
b max	3 mm
r0 max	0.6 mm
D4 max	101.6 mm
f	2.46 mm
Snap ring reference	R95
Radial clearance class	CN
Mass	0.41 kg
Brand	NTN

Product performance

Dynamic load, C	29.5 kN
Static load, C0	23.2 kN
Fatigue limit load, Cu	1.05 kN
f0	15.6
Nlim (grease)	4,100 Tr/min
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.38 Hz
Characteristic outer ring frequency, BPF0	6.07 Hz
Characteristic inner ring frequency, BPFI	7.93 Hz

Abutment dimensions

da min	66.5 mm
da max	69 mm
Da max	88.5 mm
ra max	1 mm
rNa max	0.5 mm
Db min	103 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$