


Pillow blocks cast housing Eccentric locking collar type

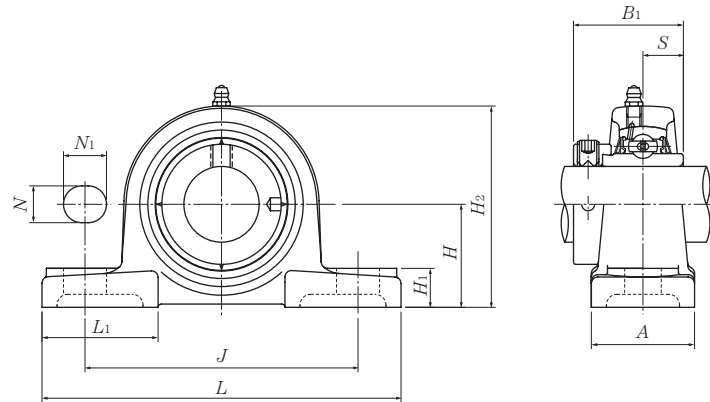

Shaft dia.	Unit number ¹⁾	Nominal dimensions											Bolt size	
mm inch		mm					inch							mm inch
		<i>H</i>	<i>L</i>	<i>J</i>	<i>A</i>	<i>N</i>	<i>N</i> ₁	<i>H</i> ₁	<i>H</i> ₂	<i>L</i> ₁	<i>B</i> ₁	<i>S</i>		
55	UEL211D1W3	63.5	219	171	60	20	23	23	126	65	71.4	27.75	M16	
2	UEL211-200D1W3													
2¹/₁₆	UEL211-201D1W3													
2¹/₈	UEL211-202D1W3	2 ¹ / ₂	8 ⁵ / ₈	6 ²³ / ₃₂	2 ³ / ₈	2 ⁵ / ₃₂	2 ⁹ / ₃₂	2 ⁹ / ₃₂	4 ³¹ / ₃₂	2 ⁹ / ₁₆	2.811	1.093	5 ⁵ / ₈	
2³/₁₆	UEL211-203D1W3													
60	UEL212D1W3	69.8	241	184	70	20	23	25	138	70	77.8	30.95	M16	
2¹/₄	UEL212-204D1W3													
2⁵/₁₆	UEL212-205D1W3													
2³/₈	UEL212-206D1W3	2 ³ / ₄	9 ¹ / ₂	7 ¹ / ₄	2 ³ / ₄	2 ⁵ / ₃₂	2 ⁹ / ₃₂	3 ¹ / ₃₂	5 ⁷ / ₁₆	2 ³ / ₄	3.063	1.219	5 ⁵ / ₈	
2⁷/₁₆	UEL212-207D1W3													
65	UEL213D1W3	76.2	265	203	70	25	28	27	151	77	85.7	34.15	M20	
2¹/₂	UEL213-208D1W3	3	10 ⁷ / ₁₆	8	2 ³ / ₄	3 ¹ / ₃₂	1 ³ / ₃₂	1 ¹ / ₁₆	5 ¹⁵ / ₁₆	3 ¹ / ₃₂	3.374	1.344	3 ³ / ₄	
2⁹/₁₆	UEL213-209D1W3													
70	UEL214D1W3	79.4	266	210	72	25	28	27	157	77	85.7	34.15	M20	
2⁵/₈	UEL214-210D1W3													
2¹¹/₁₆	UEL214-211D1W3	3 ¹ / ₈	10 ¹⁵ / ₃₂	8 ⁹ / ₃₂	2 ²⁷ / ₃₂	3 ¹ / ₃₂	1 ³ / ₃₂	1 ¹ / ₁₆	6 ³ / ₁₆	3 ¹ / ₃₂	3.374	1.344	3 ³ / ₄	
2³/₄	UEL214-212D1W3													
75	UEL215D1W3	82.6	275	217	74	25	28	28	163	80	92	37.3	M20	
2¹³/₁₆	UEL215-213D1W3													
2⁷/₈	UEL215-214D1W3													
2¹⁵/₁₆	UEL215-215D1W3	3 ¹ / ₄	10 ¹³ / ₁₆	8 ¹⁷ / ₃₂	2 ²⁹ / ₃₂	3 ¹ / ₃₂	1 ³ / ₃₂	1 ³ / ₃₂	6 ¹³ / ₃₂	3 ⁵ / ₃₂	3.622	1.469	3 ³ / ₄	
3	UEL215-300D1W3													

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 44 for size of grease fitting.