



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number LM114811, Tapered Roller Bearings - Single Cups - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

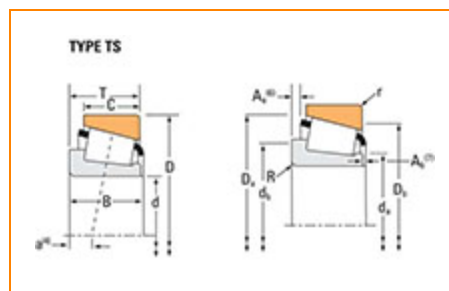

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Factors](#)

Specifications

Series	LM114800
Cup Part Number	LM114811
Design Units	Imperial

Dimensions

D - Cup Outer Diameter	4.5625 in 115.888 mm
C - Cup Width	0.9375 in 23.813 mm

Abutment and Fillet Dimensions

r - Cup Backface "To Clear" Radius¹	0.06 in 1.52 mm
Da - Cup Frontface Backing Diameter	4.35 in 110.00 mm
Db - Cup Backface Backing Diameter	4.21 in 106.93 mm

Factors


e - ISO Factor²	0.27
Y - ISO Factor³	2.2
Cg - Geometry Factor⁴	0.105

¹ These maximum fillet radii will be cleared by the bearing corners.

² These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

³ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁴ Geometry constant for Lubrication Life Adjustment Factor a3l.

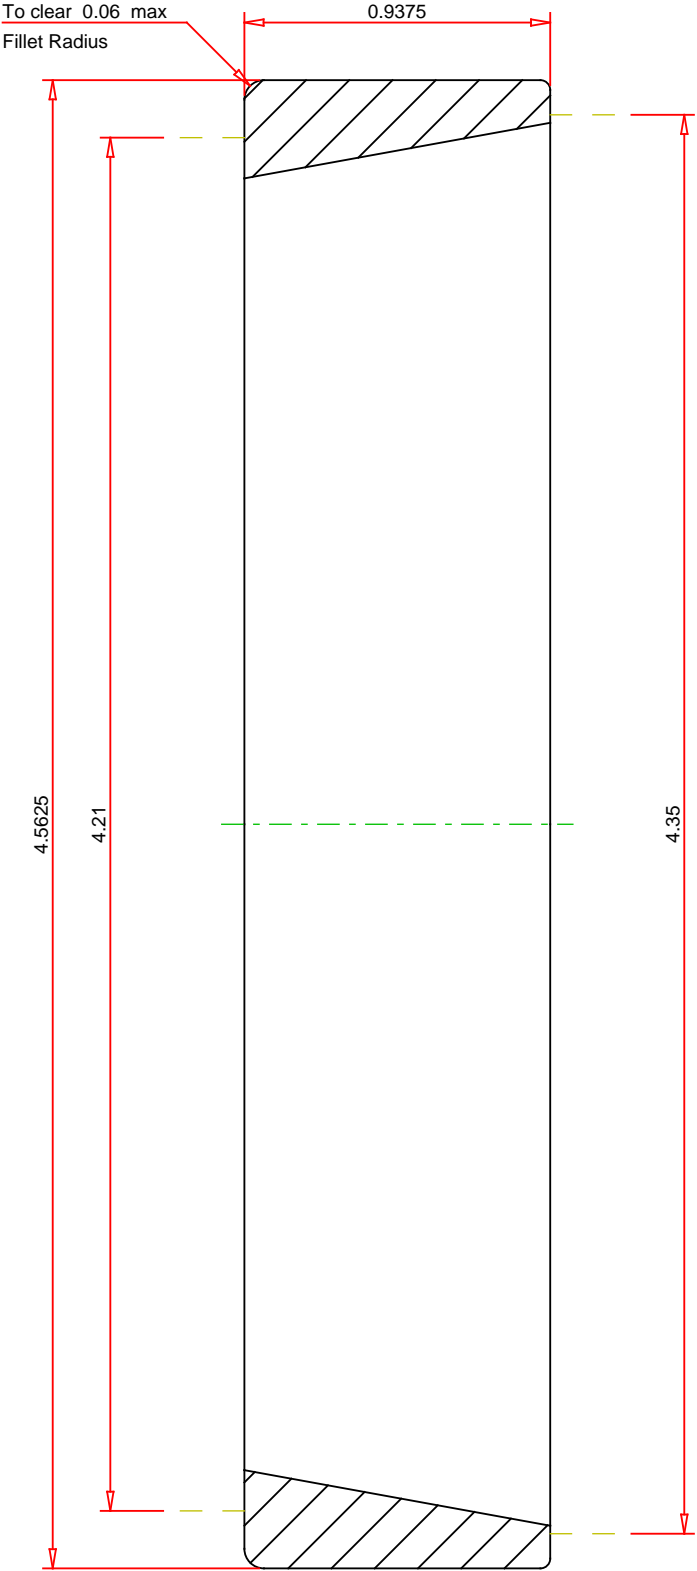

IMPERIAL UNITS

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

LM114811
SINGLE TAPERED CUP