



Brand of NTN corporation

Technical data

UCPA205

Bearing units




Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC205G2

VISUAL (S)

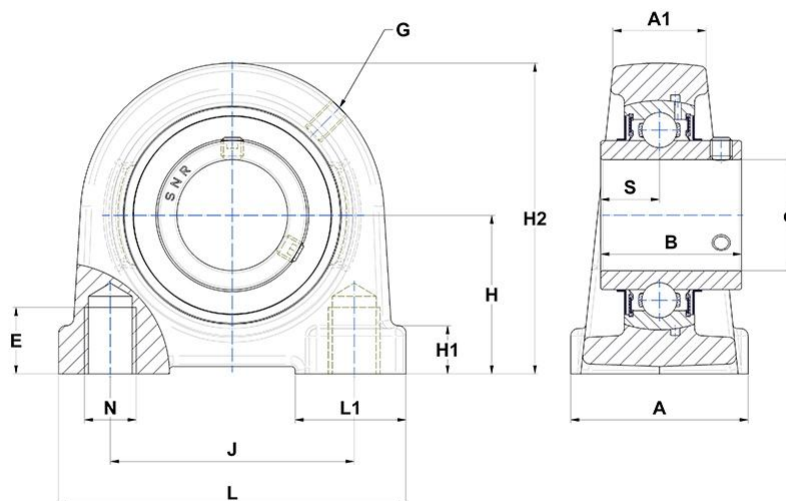

PRODUCT DEFINITION

Brand	SNR
A - Housing width	38 mm
A1 - Housing top width	23 mm
B - Width of Inner Ring	34 mm
d - Shaft diameter	25 mm
E - Mounting hole thread depth	15 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION

G - Grease fitting	M6x1
H - Distance mounting base to centerline spheric. seating diam.	36,5 mm
H1 - Housing foot height	12 mm
H2 - Housing height	72 mm
J - Mounting holes distance	56 mm
L - Housing length	84 mm
L1 - Housing foot length	27 mm
N - Mounting hole dimension	M10
S - Distance front side/bearing centre	14,3 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	14 kN
C0 - Static load rating	7,88 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,71 kg
Recommended tightening torque for set screw	5.5 N-m

