

Type : 3EL160M4C-PD-BA-C34

RE: 891450

Date : 03.01.2022

Power [kW] : 11.0
 Input Voltage [V] : 400
 Connection Type [Δ / Y] : Δ
 Frequency [Hz] : 50
 Pole Number : 4
 Nominal Speed [rpm] : 1465
 Nominal Current [A] : 21.0
 Nominal Moment [Nm] : 71.7
 Nominal Efficiency [η] : 91.5
 Power Factor [$\cos\phi$] : 0.83
 Locked Rotor Current [I_a/I_n] : 7.6
 Locked Rotor Torque [Ma/Mn] : 2.8
 Breakdown Torque [Mk/Mn] : 3.3
 Motor Color : RAL 7031
 Ambient Temperature : -15°C / +40°C

Efficiency Class : IE3
 Duty Cycle : S1
 Service Factor : 1.20
 Frame Size : 160M
 Weight [kg] : 89.2
 Insulation Class : F [155°C]
 Temperature Rise : B [80°K]
 Protection Class : IP55
 Vibration Severity Grade : A
 Method of Cooling : IC411
 Direction of Rotation : Bidirectional
 Balance : Half Key
 Motor Protection : PTC
 Altitude Above Sea Level : 1000m
 Sound Pressure Level [dBA] : 63

ELECTRICAL DATA

Δ / Y	U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	η [%]	$\cos\phi$
Δ	400	50	11.0	1465	21.0	91.5	0.83
Y	690	50	11.0	1465	12.1	91.5	0.83
Δ	460	60	12.8	1760	20.6	92.4	0.84


MECHANICAL DATA

Moment of Inertia [kgm²] : 0.07011
 Bearing DS / NS : 6309ZZ / 6209ZZ
 Frame Material : Aluminum
 Flange Type / Material : B3 / Aluminum
 Cooling Fan Material : Plastic
 End Shield Material : Aluminum

TERMINAL BOX

Terminal Box Material : Aluminum
 Terminal Box Position : Top
 Terminal Box Cable Entry : 2xM32x1.5
 Terminal Box Blind Cap : --
 Contact Screw Thread : M6

MECHANICAL DIMENSIONS

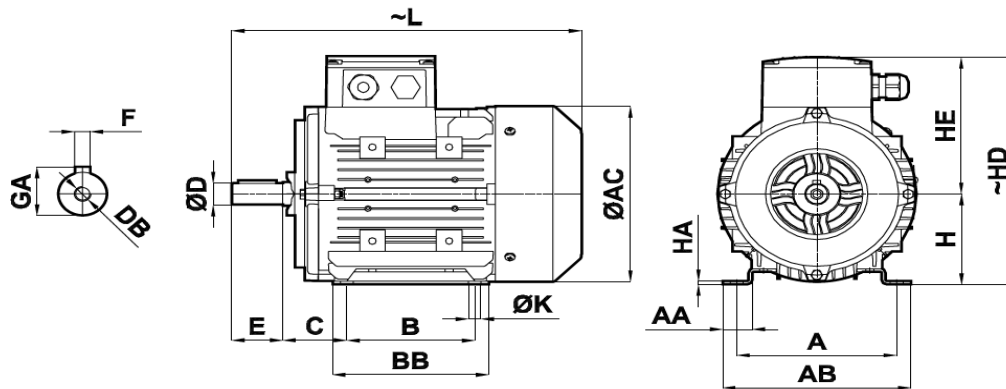

FLANGE TYPE	D	E	L	AC	H	HE	HD	F	GA	DB	C	ØK	B	BB	HA	AA	A	AB
B3	42	110	605	316	160	224	384	12	45	M16	108	14.5	210	323	15	65	254	295

Manufactured and tested in accordance with IEC 60034

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*MECALINE has right to change all the data without prior notice.

FR.AG.010 REV. NO: 03 REV TARİHİ : 01.01.2021

Europe
 Rubix Engineering
 61 Avenue Tony Garnier
 69007 Lyon
 France

UK
 Brammer UK Ltd (A Rubix Company)
 Dakota House, Concord Business Park
 Manchester M22 0RR
 UK