





**3809-450-32-2.00-10**

**10 TPI Sandflex® Bi-Metal Power  
Hacksaw Blades 450 mm x 32 mm  
x 2 mm**

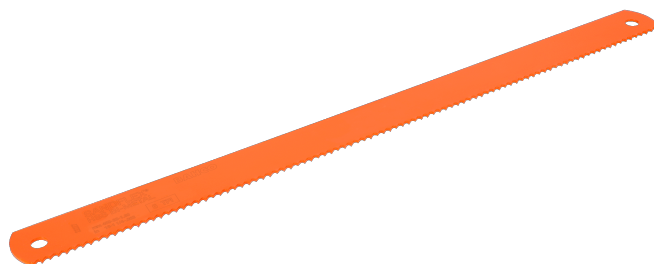

## PRODUCT DETAILS

- Suitable for use on any material
- Sandflex® is virtually an unbreakable bi-metal hacksaw blade
- Shatterproof blade that can withstand high feed pressures yet giving accurate, fast cutting rates
- Sandflex® blades are safer to use in all circumstances, especially on old machines or with unskilled operators
- Correct blade tension is essential for ensuring a straight kerf and a long useful life of the blade
- If the tension is too low, the blade will bend upwards or twist, giving rise to high stresses, heavy wear of the blade and uneven, crooked kerfs
- Excessive tension causes high stresses in the blade and saw frame
- As a general rule, harder materials call for a lower stroke rate and higher feed pressure
- If the chips are burnt, feed pressure is too high
- If tooth cracks appear, feed pressure is too high
- Fine, powdery chips indicate that feed pressure is too low
- Fine curled chips indicate the optimal feed pressure
- The teeth should not be touching the workpiece when the machine is started
- A useful rule of thumb is that at least three teeth should be engaged at any time



**Follow the Fish!**



PRODUCT ATTRIBUTES

| Product             |  | L      | W     | T       |  |
|---------------------|-----------------------------------------------------------------------------------|--------|-------|---------|-------------------------------------------------------------------------------------|
| 3809-450-32-2.00-10 | 10                                                                                | 450 mm | 32 mm | 2.00 mm | 209 g                                                                               |

